




MDS500L

500 Watts, 50 Volts, Pulsed
Avionics 1030 - 1090 MHz

GENERAL DESCRIPTION

The MDS500L is a high power COMMON BASE bipolar transistor. It is designed for MODE-S ELM systems in the 1030 - 1090 MHz frequency band. The transistor includes input and output prematch for broadband performance. The device has gold thin-film metallization and diffused ballasting in a hermetically sealed package for proven highest MTTF.

CASE OUTLINE 55ST Style 1



ABSOLUTE MAXIMUM RATINGS

Maximum Power Dissipation

Device Dissipation @25°C¹ 833 W

Maximum Voltage and Current

Collector to Emitter Voltage (BV_{ces}) 70 V

Emitter to Base Voltage (BV_{ebo}) 3.5 V

Peak Collector Current (I_c) 24 A

Maximum Temperatures

Storage Temperature -65 to +150 °C

Operating Junction Temperature +200 °C

ELECTRICAL CHARACTERISTICS @ 25°C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
P _{out}	Power Out	F = 1030, 1090 MHz	500			W
P _{in}	Power Input	V _{cc} = 50 Volts			60	W
P _g	Power Gain	PW = Note 2	9.2			dB
η _c	Collector Efficiency	DF = Note 2		50		%
VSWR	Load Mismatch Tolerance				2:1	
Pd ¹	Pulse Droop				0.8	dB
Trise ¹	Rise Time				100	nSec

FUNCTIONAL CHARACTERISTICS @ 25°C

BV _{ebo}	Emitter to Base Breakdown	I _e = 15 mA	3.0			V
BV _{ces}	Collector to Emitter Breakdown	I _c = 50 mA	70			V
BV _{cbo}	Collector to Base Breakdown	I _c = 50 mA	70			V
I _{ces}	Collector to Emitter Leakage	V _{ce} = 50V			15	mA
h _{FE}	DC – Current Gain	V _{ce} = 5V, I _c = 1.0 A	20			
θ _{jc} ¹	Thermal Resistance				0.08	°C/W




NOTE 1: AT RATED OUTPUT POWER AND PULSE CONDITIONS

NOTE 2: ELM Burst: 32μSec ON/ 18μSec OFF x 48, repeated at 23mSec

REV C – March 2008


Microsemi reserves the right to change, without notice, the specifications and information contained herein. Visit our web site at www.microsemi.com or contact our factory direct.

MDS500L SAMPLE RF DATA (SN#7-23; WO#51157X)

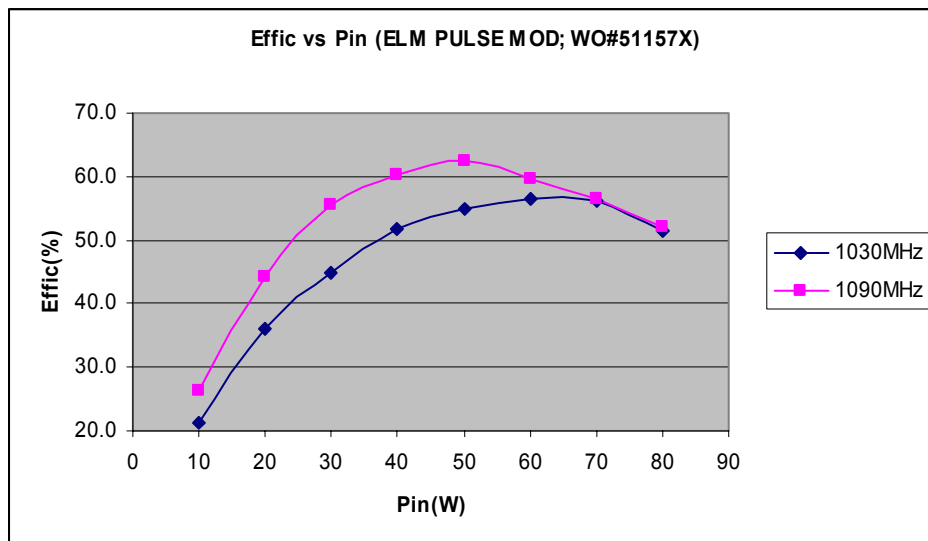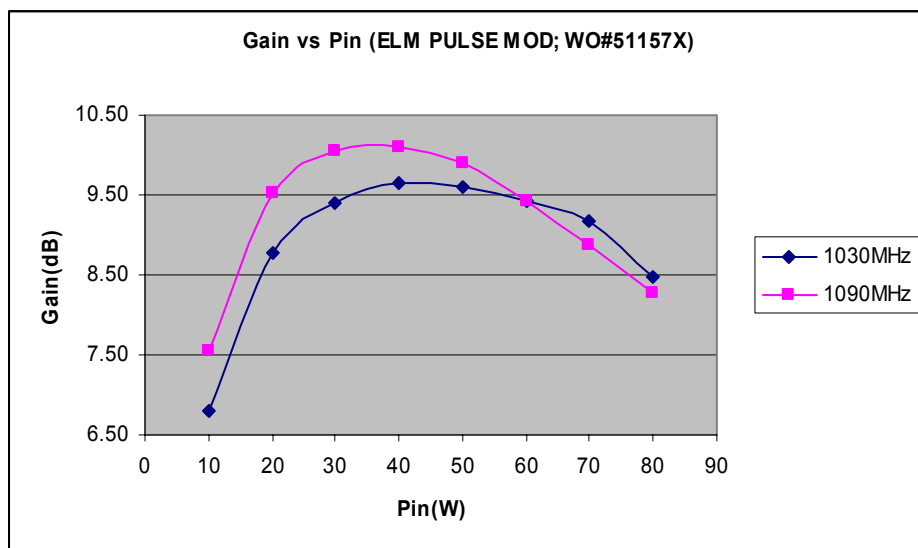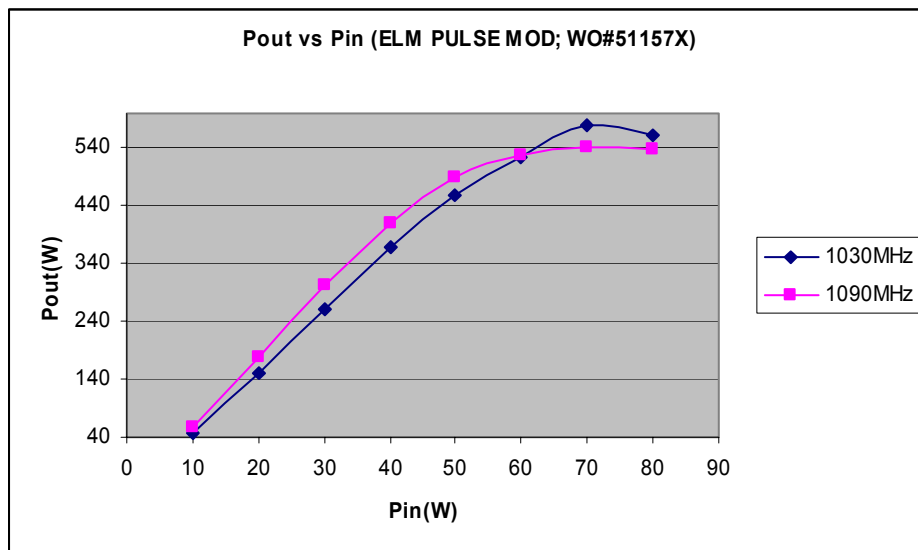


Microsemi reserves the right to change, without notice, the specifications and information contained herein. Visit our web site at www.microsemi.com or contact our factory direct.

MDS500L TEST FIXTURE

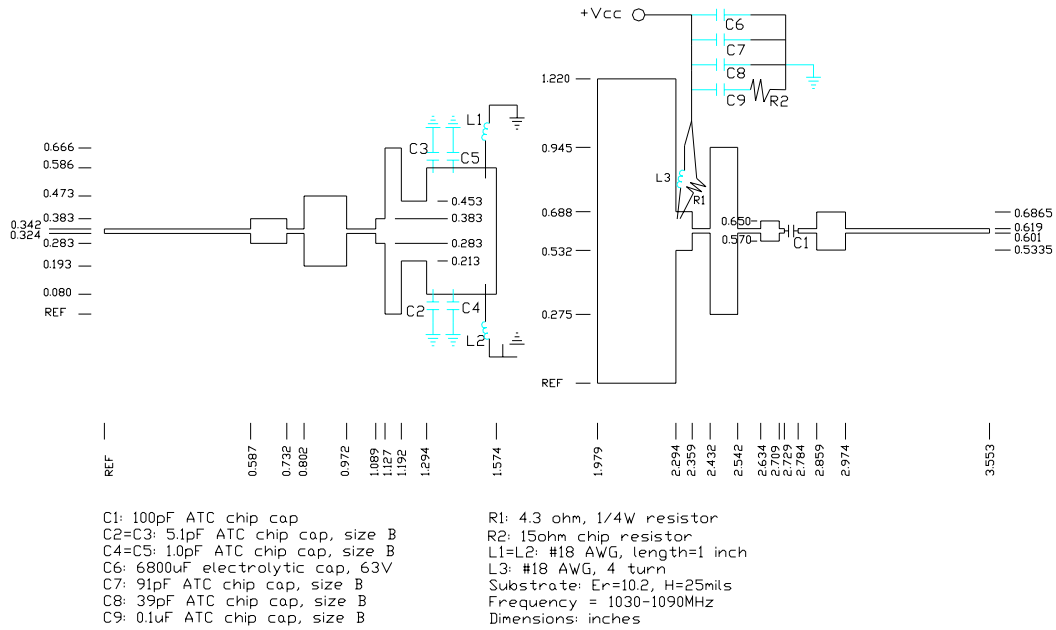


IMPEDANCE DATA

FREQUENCY	Z_{source} (ohms)	Z_{load} (ohms)
1030	$1.90 - j1.60$	$1.79 - j1.51$
1090	$2.10 - j1.61$	$2.05 - j1.76$
1150	$2.26 - j1.82$	$2.21 - j2.21$

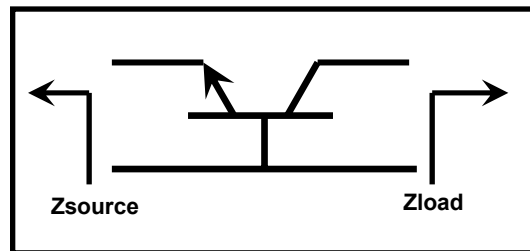


MDS500L

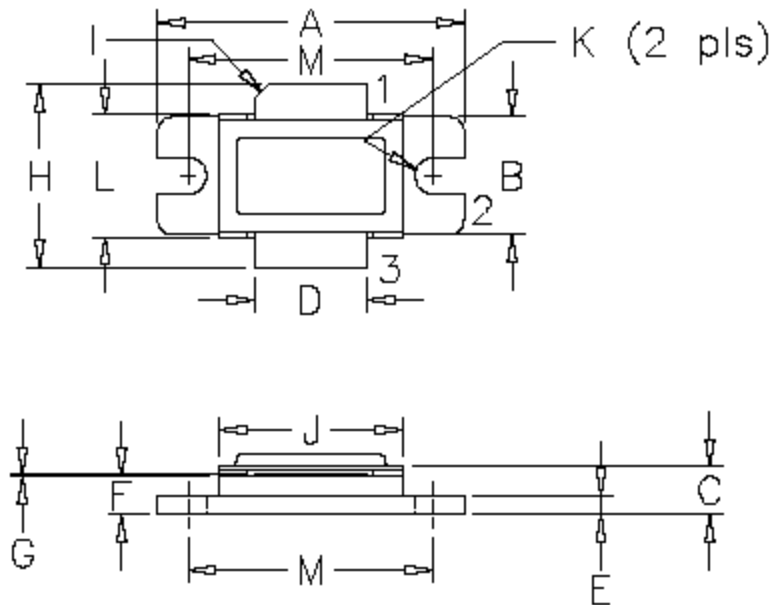

DIM	MILLIMETER	TOL	INCHES	TOL
A	25.40	.25	1.000	.010
B	9.78	.25	.385	.010
C	4.00	.19	.142	.007
D	9.40	.13	.370	.005
E	1.53	.13	.060	.005
F	3.18	.13	.125	.005
G	0.08	$\pm .02 / -.08$	.003	$\pm .002 / -.000$
H	19.05	0.51	.750	.020
I	45°	5°	45°	5°
J	15.24	.25	.600	.010
K	3.05 DIA	.13	.120 DIA	.005
L	10.15	.13	.400	.005
M	20.32	.25	.800	.010

STYLE 1:
PIN 1 = COLLECTOR
2 = BASE
3 = EMITTER

STYLE 2:
PIN 1 = COLLECTOR
2 = EMITTER
3 = BASE



DWG NO.

55ST

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Microchip:](#)

[MDS500L](#)