

DATA SHEET

OLF500: High CMR, High-Speed Logic Gate Hermetic Surface Mount Optocoupler

Features

- Hermetic SMT flat-pack package
- Electrical parameters guaranteed over -55°C to $+125^{\circ}\text{C}$ ambient temperature range
- Guaranteed minimum common mode
- High CMR transient immunity, $>1000\text{ V}/\mu\text{s}$
- $1000\text{ V}_{\text{DC}}$ electrical isolation
- LSTTL/TTL compatible
- Fast switching speeds
- Radiation tolerant
- Offers 100% high reliability screenings

Description

The OLF500 is suitable for high-speed digital interfacing applications, elimination of ground loops, and input/output buffering in a hermetic SMT package. Each OLF500 has an LED and integrated high-speed detector that is mounted and coupled in a custom 8-pin hermetic flat-pack package, providing $1000\text{ V}_{\text{DC}}$ electrical isolation between the input and output. The light from the LED is collected by the photo-diode in the integrated detector, and amplified by a high-gain linear amplifier that drives a Schottky-clamped open collector output transistor. The internal shield improves the common mode transient immunity to a minimum of $1000\text{ V}/\mu\text{s}$.

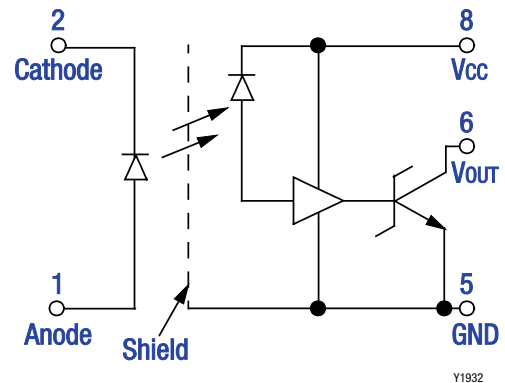


Figure 1. OLF500 Block Diagram

Figure 1 shows the OLF500 functional block diagram. Table 1 provides the OLF500 absolute maximum ratings. Table 2 provides the OLF500 electrical specifications.

Figures 2 through 5 illustrate the OLF500 typical performance characteristics. Figure 6 shows the OLF500 switching test circuit. Figure 7 provides the OLF500 package dimensions.

Table 1. OLF500 Absolute Maximum Ratings (Note 1)

Parameter	Symbol	Minimum	Maximum	Units
<i>Coupled</i>				
Input to output isolation voltage	V _{DC}		±1000	V
Storage temperature	T _{STG}	–65	+150	°C
Operating temperature	T _A	–55	+125	°C
Lead temperature (1.6 mm from case for 10 seconds)			+240	°C
Total power dissipation	P _D		+170	mW
<i>Input Diode</i>				
Average input current	I _{DD}		20	mA
Peak forward current (≤ 1 ms duration)	I _F		40	mA
Reverse voltage	V _R		5	V
Power dissipation	P _D		36	mW
<i>Output Detector</i>				
Peak output current			25	mA
Supply voltage (1 minute maximum)	V _{CC}		7	V
Output collector power dissipation	P _D		40	mW

Note 1: Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

CAUTION: Although this device is designed to be as robust as possible, electrostatic discharge (ESD) can damage this device. This device must be protected at all times from ESD. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD precautions should be used at all times.

Table 2. OLF500 Electrical Specifications (Note 1)
($T_A = 55\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$, Unless Otherwise Noted)

Parameter	Symbol	Test Condition	Minimum	Typical	Maximum	Units
Low level output voltage (Note 2)	V_{OL}	$V_{CC} = 5.5\text{ V}$, $I_{OL} = 10\text{ mA}$, $I_F = 5\text{ mA}$		0.4	0.6	V
High level output current (Note 2)	I_{OH}	$V_{CC} = V_O = 5.5\text{ V}$, $I_F = 250\text{ }\mu\text{A}$		5	250	μA
High level supply current (Note 2)	I_{CCH}	$V_{CC} = 5.5\text{ V}$, $I_F = 0\text{ mA}$		11	16	mA
Low level supply current (Note 2)	I_{CCL}	$V_{CC} = 5.5\text{ V}$, $I_F = 5\text{ mA}$		16	20	mA
Input forward voltage	V_F	$I_F = 10\text{ mA}$		1.8	2.5	V
Input reverse breakdown voltage	B_{VR}	$I_F = 10\text{ }\mu\text{A}$	3			V
Input to output leakage current (Note 3)	I_{L_O}	Relative humidity $\leq 50\%$, $T_A = 25\text{ }^{\circ}\text{C}$, $V_{L_O} = 1000\text{ V}_{DC}$			1	μA
Propagation Delay Time (Note 2):						
Logic high to low	T_{PHL}	$I_F = 7.5\text{ mA}$, $V_{CC} = 5\text{ V}$, $R_L = 510\text{ }\Omega$		60	140	ns
Logic low to high	T_{PLH}	$I_F = 7.5\text{ mA}$, $V_{CC} = 5\text{ V}$, $R_L = 510\text{ }\Omega$		60	140	ns
Common mode transient immunity (Note 2):						
High output	CM_H	$V_{CM} = 50\text{ V peak}$, V_O (minimum) $= 2.0\text{ V}$, $R_L = 510\text{ }\Omega$, $I_F = 0\text{ mA}$, $T_A = 25\text{ }^{\circ}\text{C}$	1000	10,000		V/ μs
Low output	CM_L	$V_{CM} = 50\text{ V peak}$, V_O (minimum) $= 0.8\text{ V}$, $R_L = 510\text{ }\Omega$, $I_F = 5\text{ mA}$, $T_A = 25\text{ }^{\circ}\text{C}$	1000	10,000		V/ μs

Note 1: Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to the device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

Note 2: A ceramic bypass capacitor (0.01 μF to 0.1 μF) is required between pins 5 and 8 to stabilize the operation of the amplifier.

Note 3: Measured between pins 1, 2, 3, and 4 shorted together, and pins 5, 6, 7, and 8 shorted together. $T_A = 25\text{ }^{\circ}\text{C}$ and duration = 1 second.

Typical Performance Characteristics

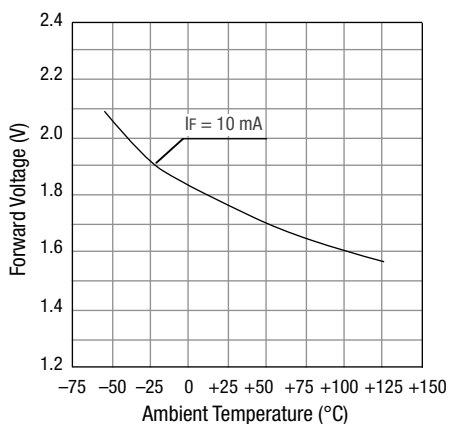


Figure 2. Input Diode Forward Voltage vs Temperature

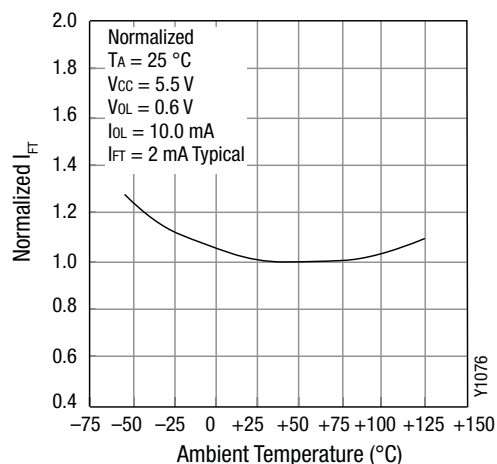


Figure 3. Normalized Current vs Temperature

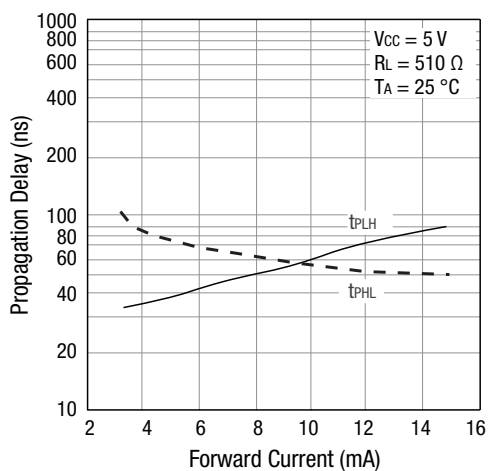


Figure 4. Propagation Delay vs Input Forward Current

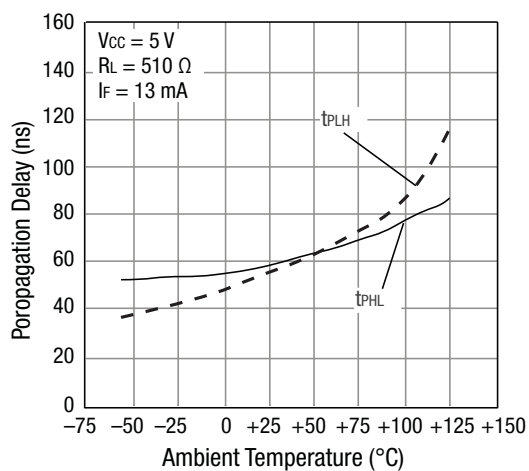


Figure 5. Propagation Delay vs Temperature

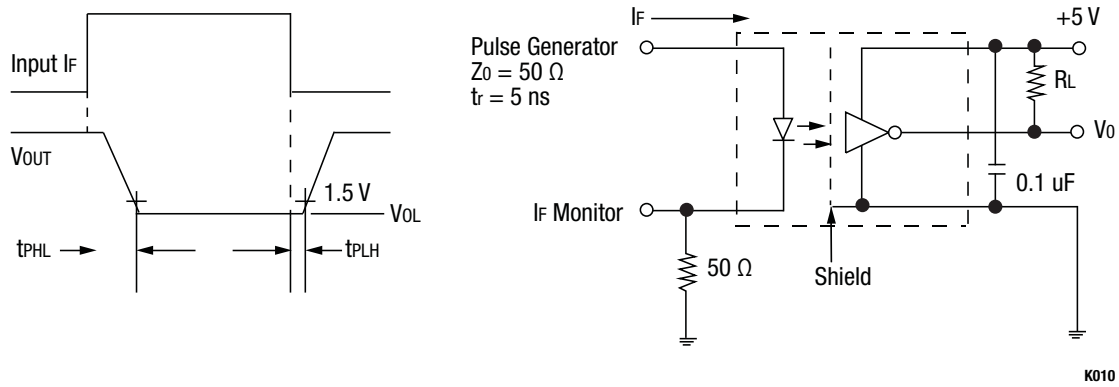


Figure 6. OLF500 Switching Test Circuit

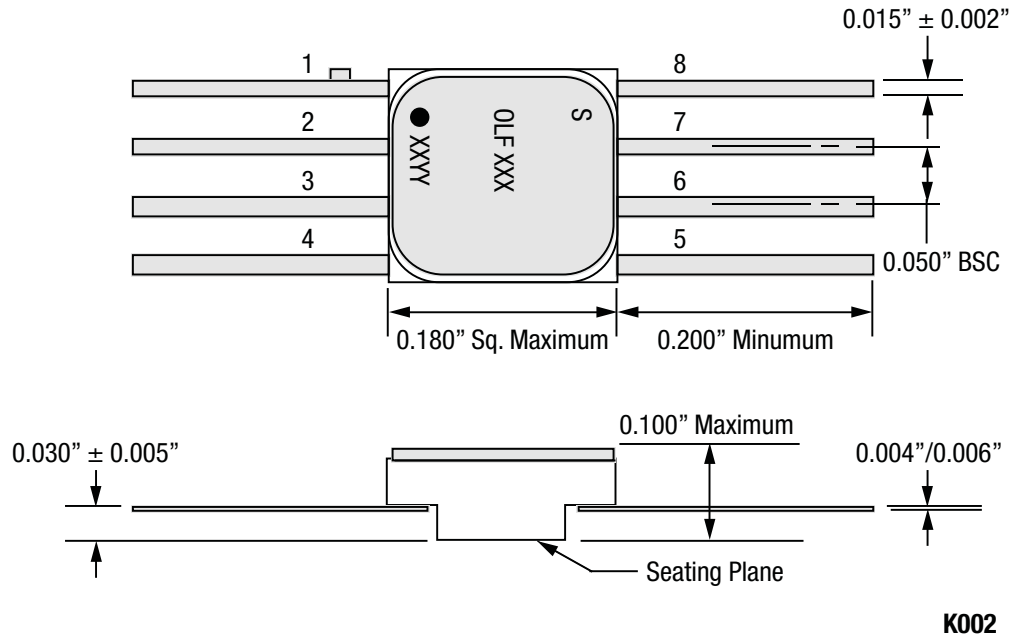


Figure 7. OLF500 Package Dimensions

Ordering Information

Model Name	Manufacturing Part Number
OLF500: High CMR, High-Speed Logic Gate Hermetic Surface Mount Optocoupler	OLF500

Copyright © 2012-2015, 2017 Isolink, Inc. All Rights Reserved.

Information in this document is provided in connection with Isolink, Inc. ("Isolink"), a wholly-owned subsidiary of Skyworks Solutions, Inc. These materials, including the information contained herein, are provided by Isolink as a service to its customers and may be used for informational purposes only by the customer. Isolink assumes no responsibility for errors or omissions in these materials or the information contained herein. Isolink may change its documentation, products, services, specifications or product descriptions at any time, without notice. Isolink makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Isolink assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Isolink products, information or materials, except as may be provided in Isolink Terms and Conditions of Sale.

THE MATERIALS, PRODUCTS AND INFORMATION ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. ISOLINK DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. ISOLINK SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Customers are responsible for their products and applications using Isolink products, which may deviate from published specifications as a result of design defects, errors, or operation of products outside of published parameters or design specifications. Customers should include design and operating safeguards to minimize these and other risks. Isolink assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Isolink products outside of stated published specifications or parameters.

Isolink is a trademark of Isolink Inc. in the United States and other countries. Skyworks and the Skyworks symbol are trademarks or registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only, and are the property of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Skyworks:](#)

[OLF500](#)