



36 Watt Universal 2-Wire Input Adapter



Features

- Low Cost
- Non-Vented/Spill-proof Case
- Ecodesign ErP Directive 2009/125/EC level 2 annex 1b Compliant
- Low Profile Design
- Level VI Efficiency Compliant

Applications

- Portable Equipment
- Peripherals
- Networking
- Gaming Machines

Safety Approvals

- CE/EMC
- IEC 60950-1
- cUL/UL 60950-1

Mechanical Characteristics

- Length: 120mm (4.72in)
- Width: 50mm (1.98in)
- Height: 31.5mm (1.27in)
- Weight: 250g (8.82oz)

Output Specifications

Model	DC Output Voltage	Load		Ripple ¹ P-P (max.)
		Min.	Max.	
PSM36W-120L6-R	12V	0A	3A	140mV

(1) Measured with by-pass capacitors 0.1uf/10uf at output connector terminal and oscilloscope set at 20MHz

PhiHong is not responsible for any error, and reserves the right to make changes without notice. Please visit our website at www.phihong.com for the most up-to-date specifications and contact information.

Input:**AC Input Voltage Rating**

120-240V AC

AC Input Voltage Range

90-264V AC

AC Input Frequency

47-63Hz

Input Current

1.2A (RMS) max @120VAC

0.8A (RMS) max @120VAC

Leakage Current

250uA maximum

Inrush Current60A max. @120V AC and max load
(Ambient 25°C cold start)**Output:****Efficiency**

DoE Level VI

Environmental:**Temperature**

Operation 0 to 45°C

Non-operation -40 to 80°C

Operating Humidity 15 to 90%

EMI

Complies with FCC Class B

Complies with EN55032 Class B

Immunity

EN 61000-4-2, 8KV contact, 15kV air

EN 61000-4-3, Criteria A

EN 61000-4-5, 6KV L-N

EN 61000-4-6, Criteria A

EN 61000-4-11, Criteria B

Over Current Protection

<5A auto restart mode

Over-Voltage Protection

Auto-restart

Short-Circuit ProtectionOutput can be shorted permanently
without damage**Dielectric Withstand (Hi-pot) Test**Primary to Secondary: 3000V AC, 10mA for 1
minute**Insulation Resistance**

Primary to secondary: >7M ohm 500V DC

MTBF


100,000 Hours Minimum at 25°C

AC Input Connector

IEC320 C8

DC Output ConnectorCenter positive barrel (2.1mm x 5.5mm x
11.2mm)

Dimension Diagram Unit: mm

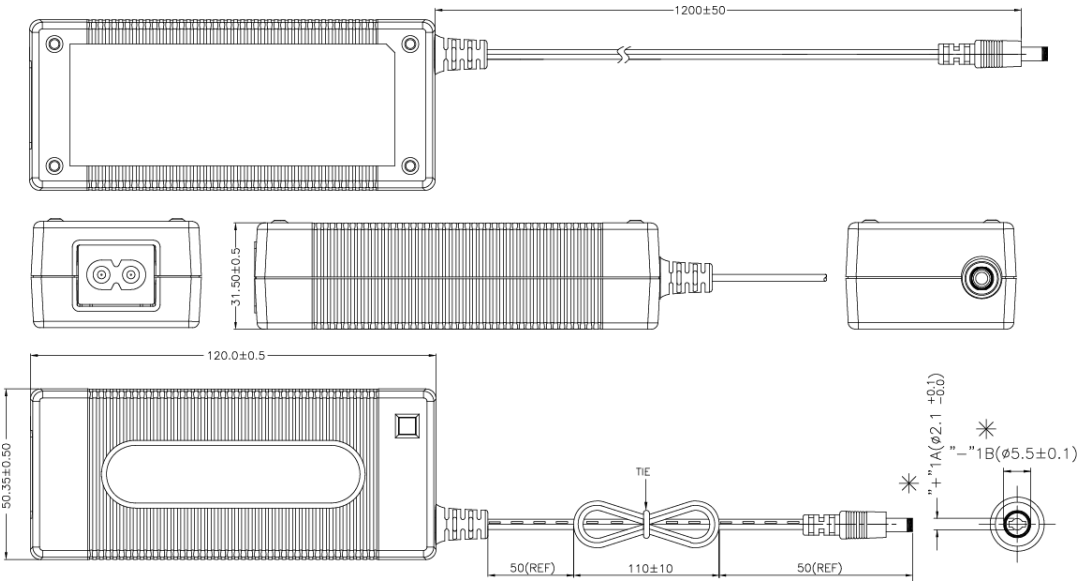

[Type text]

Supplier's Declaration of Conformity
47 CFR § 2.1077 Compliance Information

Phihong USA Corporation
47800 Fremont Boulevard
Fremont, CA 94538
Telephone: (510) 445-0100
www.phihong.com

NOTE: This model has/The models in this products series have been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Changes or modifications to equipment not expressly approved by PHIHONG could void the user's authority to operate the equipment.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Phihong:](#)

[PSM36W-120L6](#)