

**K-no.: 26078**
**50 A Current Sensor for 5V- Supply Voltage**

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit  
(electronic circuit)

**Date: 02.02.2017**
**Customer: Standard type**
**Customers Part no.:**
**Page 1 of 4**
**Description**

- Closed loop (compensation)
- Current Sensor with magnetic field probe
- Printed circuit board mounting
- Casing and materials UL-listed

**Characteristics**

- Excellent accuracy
- Very low offset current
- Very low temperature dependency and offset current drift
- Very low hysteresis of offset current
- Short response time
- Wide frequency bandwidth
- Compact design
- Reduced offset ripple

**Applications**

Mainly used for stationary operation in industrial applications:

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Switched Mode Power Supplies (SMPS)
- Power Supplies for welding applications
- Uninterruptible Power Supplies (UPS)

**Electrical data – Ratings**

|           |   |  |   |
|-----------|---|--|---|
| $I_{PN}$  | Primary nominal r.m.s. current                    | 50                                       | A |
| $V_{out}$ | Output voltage @ $I_P$                            | $V_{Ref} \pm (0.625 \cdot I_P / I_{PN})$ | V |
| $V_{out}$ | Output voltage @ $I_P=0$ , $T_A=25^\circ\text{C}$ | $V_{Ref} \pm 0.000725$                   | V |
| $V_{Ref}$ | External Reference voltage range                  | 0...4                                    | V |
|           | Internal Reference voltage                        | $2.5 \pm 0.005$                          | V |
| $K_N$     | Turns ratio                                       | 1...4 : 1400                             |   |

**Accuracy – Dynamic performance data**

|                                   |   | min.      | typ. | max.        | Unit                  |
|-----------------------------------|---|-----------|------|-------------|-----------------------|
| $I_{P,max}$                       | Max. measuring range  | $\pm 150$ |      |             |                       |
| X                                 | Accuracy @ $I_{PN}$ , $T_A=25^\circ\text{C}$  |           |      | 0.7         | %                     |
| $\varepsilon_L$                   | Linearity   |           |      | 0.1         | %                     |
| $V_{out} - V_{Ref}$               | Offset voltage @ $I_P=0$ , $T_A=25^\circ\text{C}$   |           |      | $\pm 0.725$ | mV                    |
| $\Delta V_o / V_{Ref} / \Delta T$ | Temperature drift of $V_{out}$ @ $I_P=0$ , $V_{Ref}=2.5\text{V}$ , $T_A=-40...85^\circ\text{C}$ | 0.7       |      | 10          | ppm/ $^\circ\text{C}$ |
| $t_r$                             | Response time @ 90% von $I_{PN}$  |           | 300  |             | ns                    |
| $\Delta t (I_{P,max})$            | Delay time at $di/dt = 100 \text{ A}/\mu\text{s}$   |           | 200  |             | ns                    |
| f                                 | Frequency bandwidth   | DC...200  |      |             | kHz                   |

**General data**

|       |  | min. | typ. | max. | Unit             |
|-------|--|------|------|------|------------------|
| $T_A$ | Ambient operating temperature              | -40  |      | +85  | $^\circ\text{C}$ |
| $T_S$ | Ambient storage temperature (acc to M3101) | -40  |      | +105 | $^\circ\text{C}$ |
| m     | Mass                                       |      | 12   |      | g                |
| $V_C$ | Supply voltage                             | 4.75 | 5    | 5.25 | V                |
| $I_C$ | Current consumption                        |      | 15   |      | mA               |

Constructed and manufactured and tested in accordance with EN 61800-5-1 (Pin 1 – 4 to Pin 5 – 12)  
Reinforced insulation, Insulation material group 1, Pollution degree 2

|             |  |            |  |      |    |
|-------------|--|------------|--|------|----|
| $S_{clear}$ | Clearance (component without solder pad) | 9.6        |  |      | mm |
| $S_{creep}$ | Creepage (component without solder pad)  | 10.6       |  |      | mm |
| $V_{sys}$   | System voltage overvoltage category 3    | RMS        |  | 600  | V  |
| $V_{work}$  | Working voltage                          | RMS        |  | 1060 | V  |
| $U_{PD}$    | Rated discharge voltage                  | peak value |  | 1320 | V  |

Note: "According UL 508: Max. potential difference = 600  $V_A$

| Date     | Name | Issue | Amendment   |
|----------|------|-------|---|
| 02.02.17 | DJ   | 83    | Page A1, M-sheet M3101 added (storage temperature). Minor change.               |
| 16.11.16 | DJ   | 83    | Typo: Turns ratio $K_N$ changed from 1...4 : 2000 to 1...4 : 1400. Minor change |

**Hrsg.: MC-PD**  
editor

**Bearb: DJ**  
designer

**MC-PM: Ga.**  
check

**freig.: BEF**  
released

K-no.: 26078

## 50 A Current Sensor for 5V- Supply Voltage

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit  
(electronic circuit)

Date: 02.02.2017

Customer: Standard type

Customers Part no.:



Page 2 of 4

### Mechanical outline (mm):

General tolerances DIN ISO 2768-c

Connections:

1...4: 0,46\*0,46 mm  
5..12: Ø 1 mm

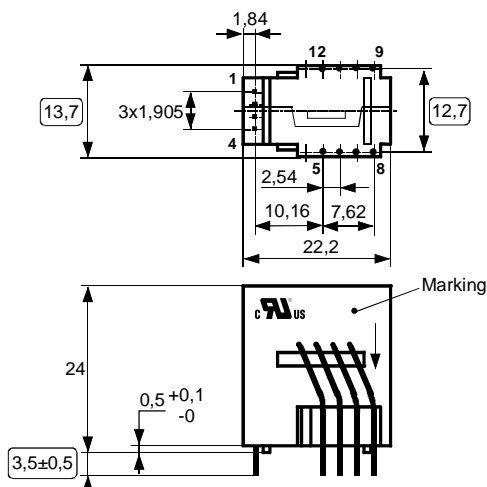

○ test dimension


Tolerances grid distance ±0,25mm

DC= Date Code  
F = Factory




Marking:

**VAC** UL-sign  
4646-X764-83  
F DC

### Schematic diagram

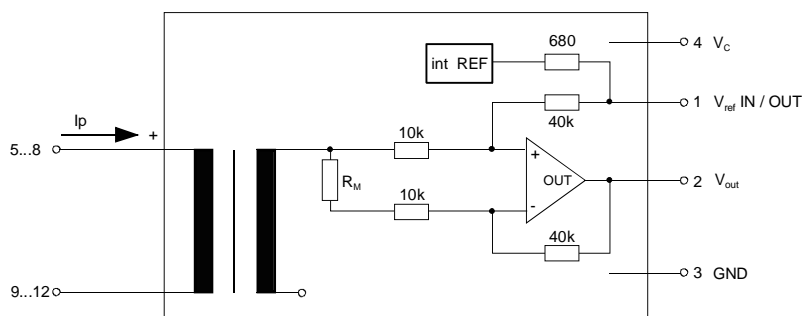

### Possibilities of wiring (@ $T_A = 85^\circ\text{C}$ )

| primary<br>windings | primary current<br>RMS | primary current<br>maximal | output voltage<br>RMS | turns ratio | primary<br>resistance | wiring   |
|---------------------|------------------------|----------------------------|-----------------------|-------------|-----------------------|--|
| $N_P$               | $I_P$ [A]              | $\hat{I}_{P,max}$ [A]      | $V_{out}(I_P)$ [V]    | $K_N$       | $R_P$ [mΩ]            |  |
| 1                   | 50                     | ±150                       | 2.5±0.625             | 1:1400      | 0.25                  |  |
| 2                   | 12                     | ±75                        | 2.5±0.300             | 2:1400      | 1.0                   |  |
| 4                   | 8                      | ±37,5                      | 2.5±0.300             | 4:1400      | 4                     |  |

Hrsg.: MC-PD  
editor

Bearb: DJ  
designer

MC-PM: Ga.  
check

freig.: BEF  
released

**K-no.: 26078**
**50 A Current Sensor for 5V- Supply Voltage**

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit  
(electronic circuit)

**Date: 02.02.2017**
**Customer: Standard type**
**Customers Part no.:**
**Page 3 of 4**
**Electrical Data**

|  |  | min. | typ.                           | max. | Unit       |
|--|--|------|--------------------------------|------|------------|
| $V_{Ctot}$                               | Maximum supply voltage (without function)                                    |      |                                | 7    | V          |
| $I_C$                                    | Supply Current with primary current  | 15mA | $+I_p \cdot K_N + V_{out}/R_L$ |      | mA         |
| $I_{out,SC}$                             | Short circuit output current   |      | $\pm 20$                       |      | mA         |
| $R_P$                                    | Resistance / primary winding @ $T_A=25^\circ\text{C}$                        |      | 1                              |      | m $\Omega$ |
| $R_S$                                    | Secondary coil resistance @ $T_A=85^\circ\text{C}$                           |      |                                | 67   | $\Omega$   |
| $R_{i,Ref}$                              | Internal resistance of Reference input                                       |      | 670                            |      | $\Omega$   |
| $R_{i,V_{out}}$                          | Output resistance of $V_{out}$   |      |                                | 1    | $\Omega$   |
| $R_L$                                    | External recommended resistance of $V_{out}$                                 | 1    |                                |      | k $\Omega$ |
| $C_L$                                    | External recommended capacitance of $V_{out}$                                |      |                                | 500  | pF         |
| $\Delta X_{Ti} / \Delta T$               | Temperature drift of X @ $T_A = -40 \dots +85^\circ\text{C}$                 |      |                                | 40   | ppm/K      |
| $\Delta V_0 = \Delta(V_{out} - V_{Ref})$ | Sum of any offset drift including:   |      | 2                              | 6    | mV         |
| $V_{0t}$                                 | Longterm drift of $V_0$  |      | 1                              |      | mV         |
| $V_{0T}$                                 | Temperature drift von $V_0$ @ $T_A = -40 \dots +85^\circ\text{C}$            |      | 1                              |      | mV         |
| $V_{0H}$                                 | Hysteresis of $V_{out}$ @ $I_p=0$ (after an overload of $10 \times I_{PN}$ ) |      |                                | 1    | mV         |
| $\Delta V_0 / \Delta V_C$                | Supply voltage rejection ratio   |      |                                | 1    | mV/V       |
| $V_{oss}$                                | Offsetripple (with 1 MHz- filter first order)                                |      |                                | 35   | mV         |
| $V_{oss}$                                | Offsetripple (with 100 kHz- filter first order)                              |      | 2                              | 5    | mV         |
| $V_{oss}$                                | Offsetripple (with 20 kHz- filter first order)                               |      | 0.6                            | 1    | mV         |
| $C_k$                                    | Maximum possible coupling capacity (primary – secondary)                     |      | 5                              | 10   | pF         |
|  | Mechanical stress according to M3209/3                                       |      |                                | 30g  |            |
|  | Settings: 10 – 2000 Hz, 1 min/Octave, 2 hours                                |      |                                |      |            |

**Inspection** (Measurement after temperature balance of the samples at room temperature; SC = significant characteristic)

|                               |            |          |  |                 |        |
|-------------------------------|------------|----------|--|-----------------|--------|
| $V_{out}(SC)$                 | (V)        | M3011/6: | Output voltage vs. external reference ( $I_p=40\text{As}$ , 40-80Hz) | $625 \pm 0,7\%$ | mV     |
| $V_{out}-V_{Ref}$ ( $I_p=0$ ) | (V)        | M3226:   | Offset voltage   | $\pm 0.725$     | mV     |
| $V_d$                         | (V)        | M3014:   | Test voltage, rms, 1 s<br>pin 1 – 4 vs. pin 5 – 12                   | 1.8             | kV     |
| $V_e$                         | (AQL 1/S4) |          | Partial discharge voltage acc.M3024 (RMS)<br>with $V_{vor}$ (RMS)    | 1400<br>1750    | V<br>V |

**Type Testing** (Pin 1 - 4 to Pin 5 - 12)

|                |   |           |    |
|----------------|---|-----------|----|
| V <sub>W</sub> | HV transient test according to M3064 (1,2 μs / 50 μs-wave form) | 8         | kV |
| V <sub>d</sub> | Testing voltage to M3014  | (5 s) 3.6 | kV |
| V <sub>e</sub> | Partial discharge voltage acc.M3024 (RMS)                       | 1400      | V  |
|                | with V <sub>vor</sub> (RMS)                                     | 1750      | V  |

**Applicable documents**

Operating temperature of the current sensor and the primary conductor must not exceed  $105^\circ\text{C}$ .  
Current direction: A positive output current appears at point  $I_s$ , by primary current in direction of the arrow.  
Housing and bobbin material UL-listed: Flammability class 94V-0.  
Enclosures according to IEC529: IP50.

Further standards UL 508 file E317483, category NMTR2 / N

**Hrsg.: MC-PD**  
editor

**Bearb: DJ**  
designer

**MC-PM: Ga.**  
check

**freig.: BEF**  
released

**K-no.: 26078**
**50 A Current Sensor for 5V- Supply Voltage**

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit  
(electronic circuit)

**Date: 02.02.2017**
**Customer: Standard type**
**Customers Part no.:**
**Page 4 of 4**
**Explanation of several of the terms used in the tablets (in alphabetical order)**

**t<sub>r</sub>:** Response time (describe the dynamic performance for the specified measurement range), measured as delay time at  $I_P = 0,9 \cdot I_{PN}$  between a rectangular current and the output voltage  $V_{out}(I_P)$

**$\Delta t(I_{Pmax})$ :** Delay time (describe the dynamic performance for the rapid current pulse rate e.g short circuit current) measured between  $I_{Pmax}$  and the output voltage  $V_{out}(I_{Pmax})$  with a primary current rise of  $di_P/dt \geq 100 \text{ A}/\mu\text{s}$ .

**V<sub>0</sub>:** Offset voltage between  $V_{out}$  and the rated reference voltage of  $V_{ref} = 2,5V$ .  
 $V_0 = V_{out}(0) - 2,5V$

**U<sub>PD</sub>** Rated discharge voltage (recurring peak voltage separated by the insulation) proved with a sinusoidal voltage  $V_e$ .  
 $U_{PD} = \sqrt{2} \cdot V_e / 1,5$

**V<sub>vor</sub>** Defined voltage is the RMS value of a sinusoidal voltage with peak value of  $1,875 \cdot U_{PD}$  required for partial discharge test in IEC 61800-5-1  
 $V_{vor} = 1,875 \cdot U_{PD} / \sqrt{2}$

**V<sub>sys</sub>** System voltage RMS value of rated voltage according to IEC 61800-5-1

**V<sub>work</sub>** Working voltage voltage according to IEC 61800-5-1 which occurs by design in a circuit or across insulation

**V<sub>0H</sub>:** Zero variation of  $V_0$  after overloading with a DC of tenfold the rated value

**V<sub>0t</sub>:** Long term drift of  $V_0$  after 100 temperature cycles in the range -40 bis 85 °C.

**X:** Permissible measurement error in the final inspection at RT, defined by

$$X = 100 \cdot \left| \frac{V_{out}(I_{PN}) - V_{out}(0)}{0,625V} - 1 \right| \%$$

**X<sub>ges(I<sub>PN</sub>)</sub>:** Permissible measurement error including any drifts over the temperature range by the current measurement  $I_{PN}$

$$X_{ges} = 100 \cdot \left| \frac{V_{out}(I_{PN}) - 2,5V}{0,625V} - 1 \right| \% \quad \text{or} \quad X_{ges} = 100 \cdot \left| \frac{V_{out}(I_{PN}) - V_{ref}}{0,625V} - 1 \right| \%$$

**ε<sub>L</sub>:** Linearity fault defined by 
$$\varepsilon_L = 100 \cdot \left| \frac{I_P}{I_{PN}} - \frac{V_{out}(I_P) - V_{out}(0)}{V_{out}(I_{PN}) - V_{out}(0)} \right| \%$$

**Hrsg.: MC-PD**  
editor

**Bearb: DJ**  
designer

**MC-PM: Ga.**  
check

**freig.: BEF**  
released



## SPECIFICATION

Item no.: T60404-N4646-X764

K-no.: 26078

### 50 A Current Sensor for 5V- Supply Voltage

For electronic current measurement:  
DC, AC, pulsed, mixed ..., with a galvanic  
isolation between primary circuit  
(high power) and secondary circuit  
(electronic circuit)

Date: 02.02.2017

Customer: Standard type

Customers Part no.:

Page 5 of 4

Hrsg.: MC-PD  
editor

Bearb: DJ  
designer

MC-PM: Ga.  
check

freig.: BEF  
released

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vacuumschmelze:](#)

[T60404-N4646-X764](#)