


Multilayer Chip Band Pass Filters For 5.0GHz Digital Cordless


Conformity to RoHS Directive

DEA Series DEA205787BT-2048C1

SHAPES AND DIMENSIONS

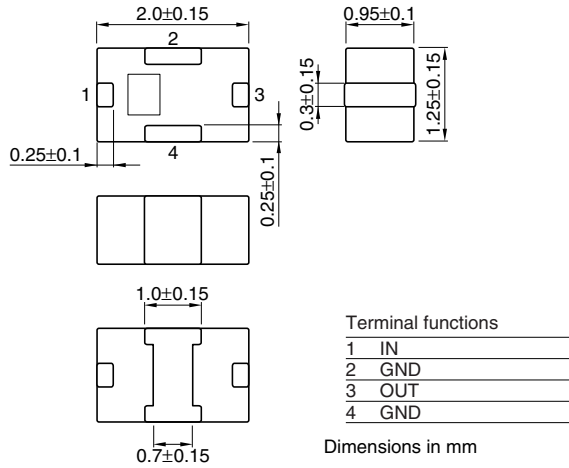

RECOMMENDED PC BOARD PATTERNS

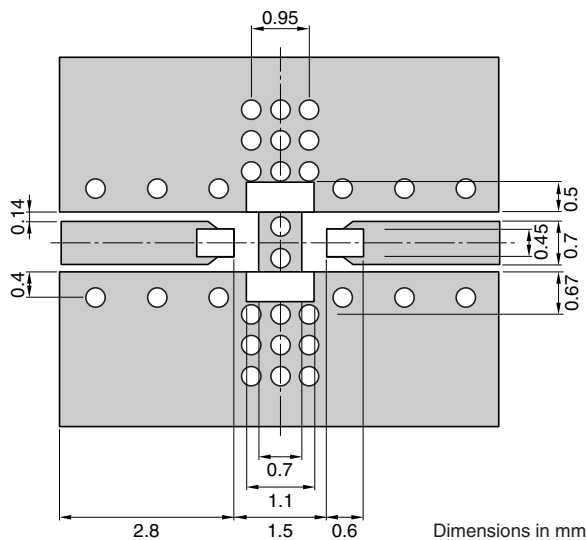

Line width be designed to match 50Ω characteristic impedance depending on PCB material and thickness.

- Conformity to RoHS Directive: This means that, in conformity with EU Directive 2002/95/EC, lead, cadmium, mercury, hexavalent chromium, and specific bromine-based flame retardants, PBB and PBDE, have not been used, except for exempted applications.

- All specifications are subject to change without notice.


ELECTRICAL CHARACTERISTICS

Item			Minimum value	Typical value	Maximum value
Center frequency	[5787.5MHz]				
Insertion loss	[5725 to 5850MHz]	(dB)	—	—	1.5
VSWR	[5725 to 5850MHz]		—	—	2.0
Attenuation	[1908 to 1950MHz]	(dB)	45	—	—
	[3816 to 3900MHz]	(dB)	45	—	—
Ripple	[11450 to 11700MHz]	(dB)	25	—	—
	[5725 to 5850MHz]	(dB)	—	—	0.6
Temperature range	Operating	(°C)	−40	—	+85
	Storage	(°C)	−40	—	+85


• Ta: +25°C

FREQUENCY CHARACTERISTICS


INSERTION LOSS

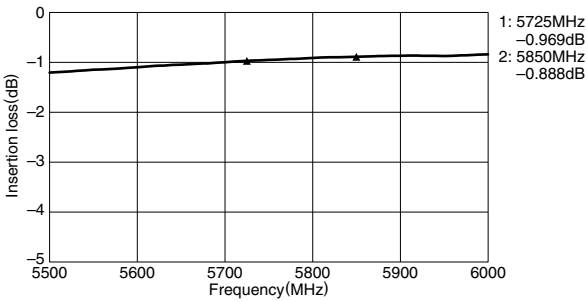

ATTENUATION

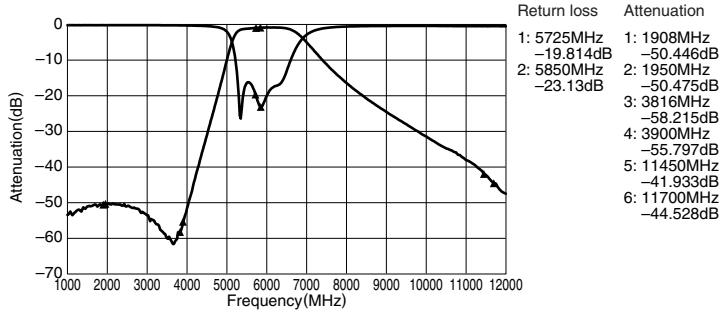

SMITH CHARTS

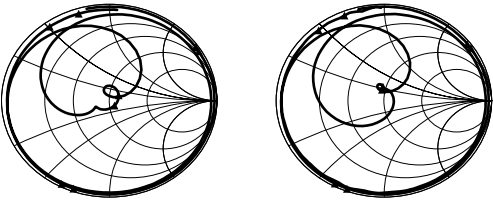

S11

S22

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TDK:

[DEA205787BT-2048C1](#)