

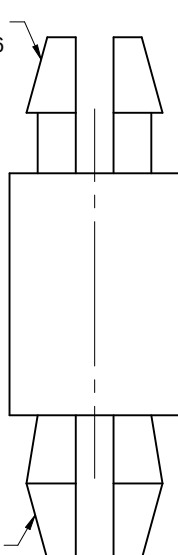
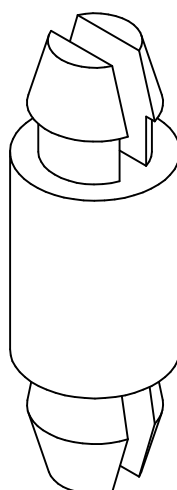


Hole in P.C.B $\varnothing 3,2$
P.C.B Thickness 1.6



Hole in P.C.B $\varnothing 3,2$
P.C.B Thickness 1.6

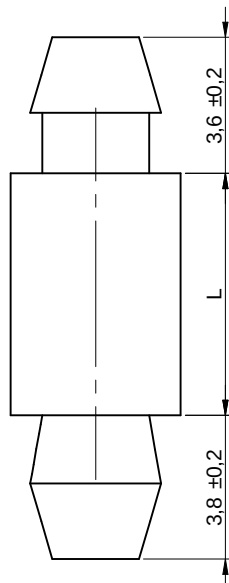

Order Code	L (mm)
701510500	3.2 $\pm$ 0,2
701511000	4.8 $\pm$ 0,2
701511500	6.4 $\pm$ 0,3
701512000	7.9 $\pm$ 0,3
701512300	8.6 $\pm$ 0,3
701512500	9.5 $\pm$ 0,3
701513000	11.1 $\pm$ 0,3
701513500	12.7 $\pm$ 0,3
701514000	14.3 $\pm$ 0,3
701514500	15.9 $\pm$ 0,3
701515000	17.5 $\pm$ 0,3
701515500	19.1 $\pm$ 0,3
701516000	20.6 $\pm$ 0,4
701516500	22.2 $\pm$ 0,4
701517000	25.4 $\pm$ 0,4
701517400	27.0 $\pm$ 0,4
701517500	28.6 $\pm$ 0,4
701518000	31.7 $\pm$ 0,4
701518500	34.9 $\pm$ 0,4
701519000	38.1 $\pm$ 0,4

Würth Elektronik eiSos GmbH & Co. KG
EMC & Inductive Solutions

Max-Eyth-Str. 1
74638 Waldenburg
Germany
Tel. +49 79 42 945 - 0

www.we-online.com
eiSos@we-online.com



CREATED
D. Fandrey

CHECKED
S. Klingler

PROJECTION
METHOD

SCALE
4:1

DESCRIPTION

AsSNSN
Snap-on keyslot spacer arresting
on both sides

MATERIAL
Nylon 66 UL94-V2

GENERAL TOLERANCE
DIN ISO 2768 T1m

ORDER CODE
70151xxxx

WEIGHT STATUS
Released

REV DATE
1.1 2016-06-29

PAGE
DE 1 / 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Wurth Electronics:](#)

[701519000](#)