

Coaxial

# Low Pass Filter

VLFG-1000+

50Ω

DC to 1000 MHz



Generic photo used for illustration purposes only  
CASE STYLE: FF704

## The Big Deal

- Excellent power handling, 6 W
- Temperature stable
- Rugged unibody construction
- Good rejection, 45 dB typical

## Product Overview

VLFG-1000+ is a 50Ω low pass filter built in rugged unibody construction. Covering DC-1000 MHz bandwidth, these units offer good matching within the passband and good rejection in stopband. VLFG-1000+ offer low insertion loss, and excellent power handling capability. It handles up to 6W RF input power and provides a wide operating temperature range from -55°C to 100°C.

## Key Features

Feature	Advantages
Low passband insertion loss	Suitable for high performance application.
6 W Power handling	Supports a range of system power requirements.
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups.

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Low Pass Filter

50Ω

DC to 1000 MHz

VLFG-1000+



Generic photo used for illustration purposes only  
CASE STYLE: FF704

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


## Features

- Low loss, 0.9 dB typical
- Good rejection 45 dB typical
- Excellent power handling, 6 W
- Temperature stable
- Connectorized package
- Rugged unibody construction

## Applications

- Harmonic Rejection
- VHF/UHF transmitters / receivers
- Lab use

## Functional Schematic

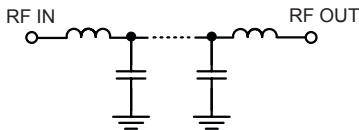

## Electrical Specifications at 25°C

Parameter		F#	Frequency (MHz)	Min.	Typ.	Max.	Unit
Pass Band	Insertion Loss	DC-F1	DC - 1000	—	0.9	1.8	dB
	Freq. Cut-Off	F2	1370	—	3.0	—	dB
	VSWR	DC-F1	DC - 1000	—	1.2	—	:1
Stop Band	Rejection Loss	F3-F4	1550 - 1900	20	29	—	dB
		F4-F5	1900 - 3000	35	45	—	dB
		F5-F6	3000 - 6000	30	40	—	dB
		F6-F7	6000 - 10000	—	34	—	dB
	VSWR	F3-F7	1550 - 10000	—	20	—	:1

### Maximum Ratings





Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input*	6 W max. @ 25°C

\*Passband rating, derate linearly to 3 W at 100°C ambient  
Permanent damage may occur if any of these limits are exceeded.

## Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
10	0.07	1.02
100	0.15	1.06
400	0.33	1.13
600	0.43	1.11
800	0.56	1.07
1000	0.83	1.22
1370	3.78	1.72
1490	20.25	4.34
1525	30.30	5.63
1550	36.72	6.69
1900	52.45	24.31
2000	48.94	28.41
2500	50.71	42.62
3000	46.20	52.94
5000	41.37	74.60
6000	44.55	60.94
7500	51.18	39.35
8000	45.20	38.57
9000	39.04	34.95
10000	36.47	31.53

## Typical Frequency Response

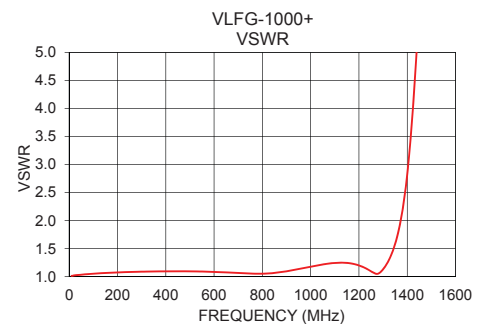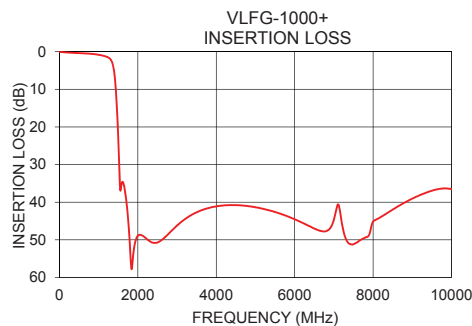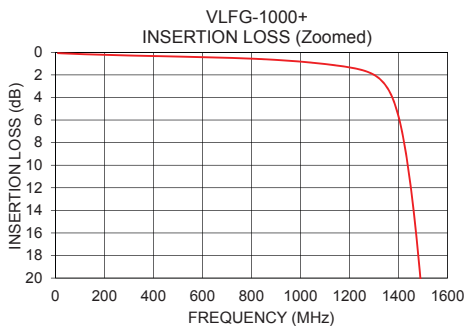

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)




[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 [sales@minicircuits.com](mailto:sales@minicircuits.com)

Coaxial Connections

PORT - 1	SMA-Male
PORT - 2	SMA-Female

Outline Drawing

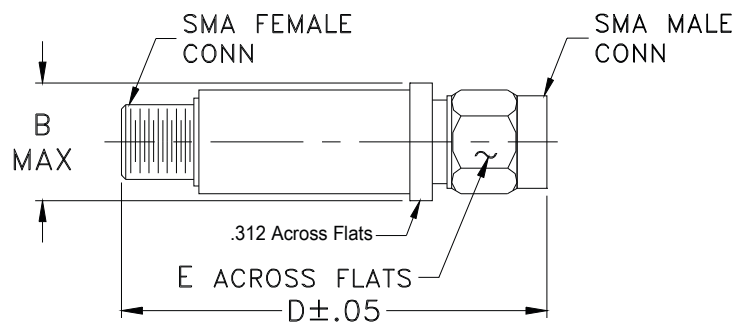

Outline Dimensions ( inch )

B	D	E	wt.
.410	1.43	.312	grams
10.41	36.32	7.92	10

Note: Please refer to case style drawing for details

Notes  
A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[VLFG-1000+](#)