| SYMBOL DEFINITION | | | MISSING NUMBERS |
|---|---|---|---|
| A DIMENSION WITHOUT AN INSPECTION REPORT SYMBOL ⬭ DOES NOT REQUIRE INSPECTION. IT MAY BE CONTROLLED ON AN INDIVIDUAL COMPONENT DRAWING. | TOTAL NO. OF SYMBOLS ON DRAWING | 7 | |
| | LAST NO. USED | 10 | |

| DWG STATUS | | | | | ZONE | REVISION HISTORY | AUTH | DR | APVD 1 | APVD 2 |
|---|---|---|---|---|---|---|---|---|---|---|
| DATE | STG | REV | N/P | CHG | | | | | | |
| 08AP99 | R | 01 | - | - | | ALL PARTS - WERE SEPARATE "B" SIZE DWG AND REVISED | 188844 | PHC | AUG | OG |
| 08N001 | R | 02 | - | - | | 12089188 - UPDATED PDM ATTRIBUTES | 215045 | MRL | MRL | DLB |
| 18AU03 | R | 03 | - | - | | 12020801, 12089188 & 12124580 - REVISED GRAPHICS | 244852 | ECB | AUG | JMP |
| 23JA07 | R | 04 | - | - | | ALL ACTIVE PARTS - UPDATED PDM ATTRIBUTES | 400088 | JBD | AUG | EJH |



SCALE 2:1



SCALE 2:1



TYPE 102
SAME AS TYPE 101
EXCEPT AS SHOWN



TYPE 103
SAME AS TYPE 101
EXCEPT AS SHOWN

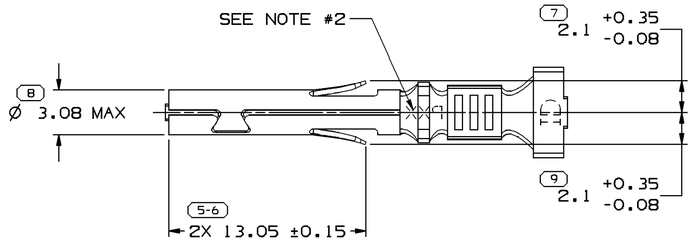


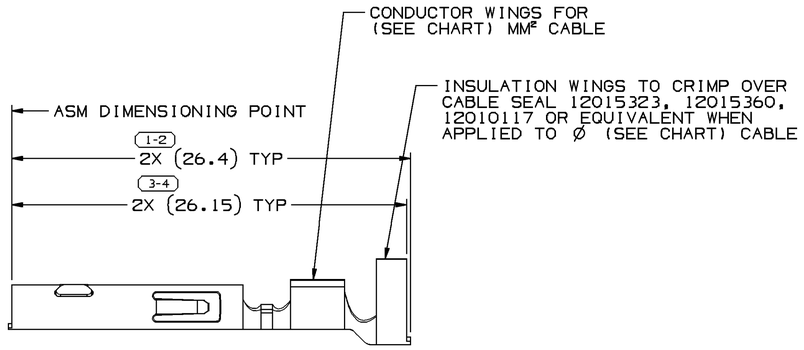




TYPE 101

NOTES

1. UNLESS OTHERWISE SPECIFIED AND/OR INDICATED: DIMENSIONS ARE TO FACE OF VIEW SHOWN AND AUTOMATICALLY ROUNDED BY COMPUTER FOR INSPECTION. (SEE MATH MODEL FOR PRECISE DIMENSIONS.) FOR ALL OTHER DIMENSIONS NOT SHOWN BUT REQUIRED FOR TOOL BUILD, SEE MATH MODEL FOR PRECISE TOOL PATH DATA.
2. "PXX" INDICATES "P" PLUS LAST TWO DIGITS OF MAKE DIE SERIES NUMBER (P01, P02, P03, ETC.).
3. TERMINAL DESIGNED FOR 3 MM² CABLE. TERMINAL IS RATED AT 20 AMPERES. -DO NOT EXCEED RATED CURRENT.

APPLICATION NOTE:
THESE TERMINALS DESIGNED FOR USE IN WEATHER PACK TOWER CONNECTORS WITH STABILIZERS LOCATED AT 11.25MM FROM THE LOCK SHOULDER.

| PART NO | STG | REV | N/P | STATUS | MAT'L SIZE | MAT'L SPEC | CABLE SIZE (MM²) | MAX CABLE Ø | ID | TYPE | E±0.4 |
|---|---|---|---|---|---|---|---|---|---|---|---|
| 12124581 | R | B2 | - | | 0.32X35.33 | P1519358 425 TIN BRS EX HD SN PLTD | SEE NOTE #3 | 3.96 | 11 | 103 | 4.6 |
| 12124580 | R | O2 | AC | | 0.32X35.33 | P1519358 425 TIN BRS EX HD SN PLTD | 2 - 1 | 3.96 | 15 | 103 | 3.6 |
| 12089188 | R | A3 | - | | 0.32X35.33 | P1519358 425 TIN BRS EX HD SN PLTD | 0.8 - 0.5 | 3.11 | 19 | 102 | 3 |
| 12034051 | R | B7 | - | OBSOLETE | 0.32X35.33 | P1519358 425 TIN BRS EX HD SN PLTD | 0.8 - 0.5 | 3.11 | 19 | 102 | 3 |
| 12020801 | R | C5 | - | | 0.32X35.33 | P1519358 425 TIN BRS EX HD SN PLTD | 0.35 | 1.86 | 22 | 102 | 2.2 |
| 12015917 | R | G1 | - | OBSOLETE | 0.32X35.33 | P1519358 425 TIN BRS EX HD SN PLTD | SEE NOTE #3 | 3.96 | 11 | 101 | 4.6 |
| 12010183 | R | P8 | - | OBSOLETE | 0.32X35.33 | P1519358 425 TIN BRS EX HD SN PLTD | 0.8 - 0.5 | 3.11 | 19 | 101 | 3 |
| 12010182 | R | P8 | - | OBSOLETE | 0.32X35.33 | P1519358 425 TIN BRS EX HD SN PLTD | 2 - 1 | 3.96 | 15 | 101 | 3.6 |

8 PROCESS SENSITIVE DIMENSION

DIMENSIONS ENCLOSED IN ( ) INDICATE REFERENCE DIMENSIONS AND NO TOLERANCE LIMITS ARE ESTABLISHED

| DIMENSIONAL RANGE (MM) | | CHART D |
|---|---|---|
| FROM | 0 | >12 |
| TO | 12 | |
| TOLERANCE UNLESS OTHERWISE SPECIFIED | | |
| ±0.1 | | ±0.2 |
| ANGULAR TOLERANCE ±2° | | |

DWG TYPE: PART DRAWING

STYLE

VOLUME (CM³)

DISTR CODE

UNLESS OTHERWISE SPECIFIED
THIS DOCUMENT IS IN ACCORDANCE WITH ASME Y14.5M-1994 AS AMENDED BY THE GM GLOBAL DIMENSIONING AND TOLERANCING ADDENDUM-2001. SEPARATE PATTERNS OF FEATURES MAY BE BASED SEPARATELY REGARDLESS OF DATUM REFERENCES.

ALL DIMENSIONS ARE IN MILLIMETERS

REFERENCE

THIRD ANGLE PROJECTION

DO NOT SCALE
USE MATH DATA

UNIGRAPHICS

DELPHI
DELPHI PACKARD ELECTRIC SYSTEMS
WARREN, OH

| | | DATE |
|---|---|---|
| DR | | |
| APVD1 | P H CASTRILLON | 08AP99 |
| APVD2 | A UGALDE G | 15AP99 |
| APVD3 | G ORANTES | 15AP99 |
| APVD4 | | |
| APVD5 | | |

SUBSTANCES OF CONCERN AND RECYCLED CONTENT PER DELPHI 10949001

MATERIAL: SEE CHART

DRAWING NAME: TAXI TERM F W/P SEALED

DRAWING NUMBER: 12010184

| SIZE | SCALE | FRAME NO | SHEET NO | STG | REV | N/P |
|---|---|---|---|---|---|---|
| A1 | 5:1 | 1 OF 1 | 1 OF 3 | R | 04 | - |

User: pzl4ch
Part: 12010184-CUS01-S01
Message:
Date: 26-Jan-07 Time: 15:03

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Aptiv:
15344718-L