

Technical drawing of a low-profile female connector (Bauform F) showing contact arrangement, board drillings, and dimensions.

Legend:

- ☒ = Kontaktposition belegt = position with contact
- ☐ = Kontaktposition nicht belegt = position without contact

Dimensions (mm):

- Overall length: 90 ± 0,1
- Overall width: 10,1 ± 0,1
- Pin pitch: 2,54
- Pin diameter: Ø 1,27
- Pin length: 4,5 ± 0,2
- Mounting hole diameter: Ø 2,8 ± 0,1
- Mounting hole spacing: 5,08
- Mounting hole offset: 1,27
- Pin offset: 0,3 ± 0,1

Ordering Information:


Bestell-Nr. / part-no.	Anforderungsstufe / performance level
09 06 232 7894	3
09 06 232 6894	2
09 06 232 2894	1

Technical Character.





Mod.	Dat.	Name	Maßstab/Scale
36054	15.06.10	Hage.	1:1
36029	19.04.10	Hage.	
30910		kfoe	

HARTING Electronics GmbH & Co. KG
D-32339 ESPELKAMP

Blatt / page
TB 09 06 232 x894



☒ = Kontaktposition belegt
 = *position with contact*
☐ = Kontaktposition nicht belegt
 = *position without contact*

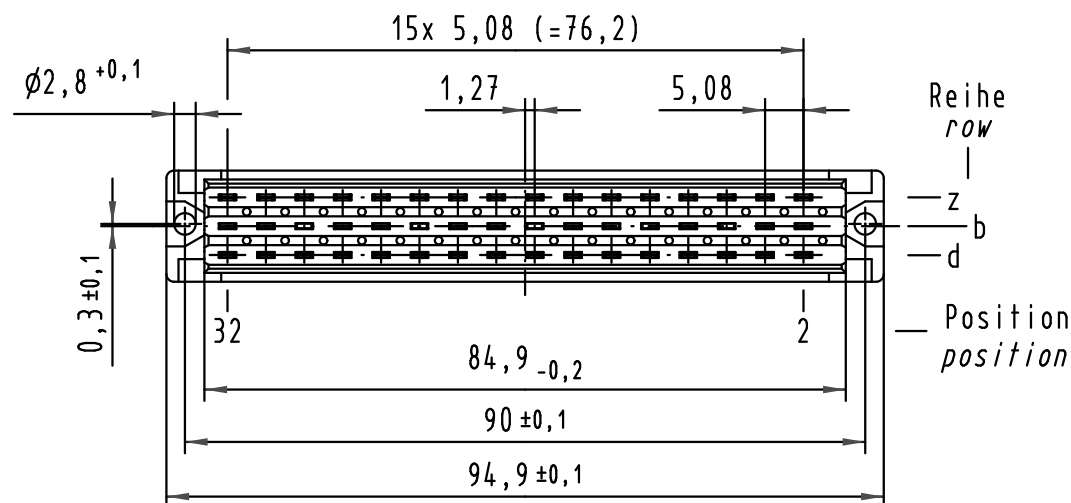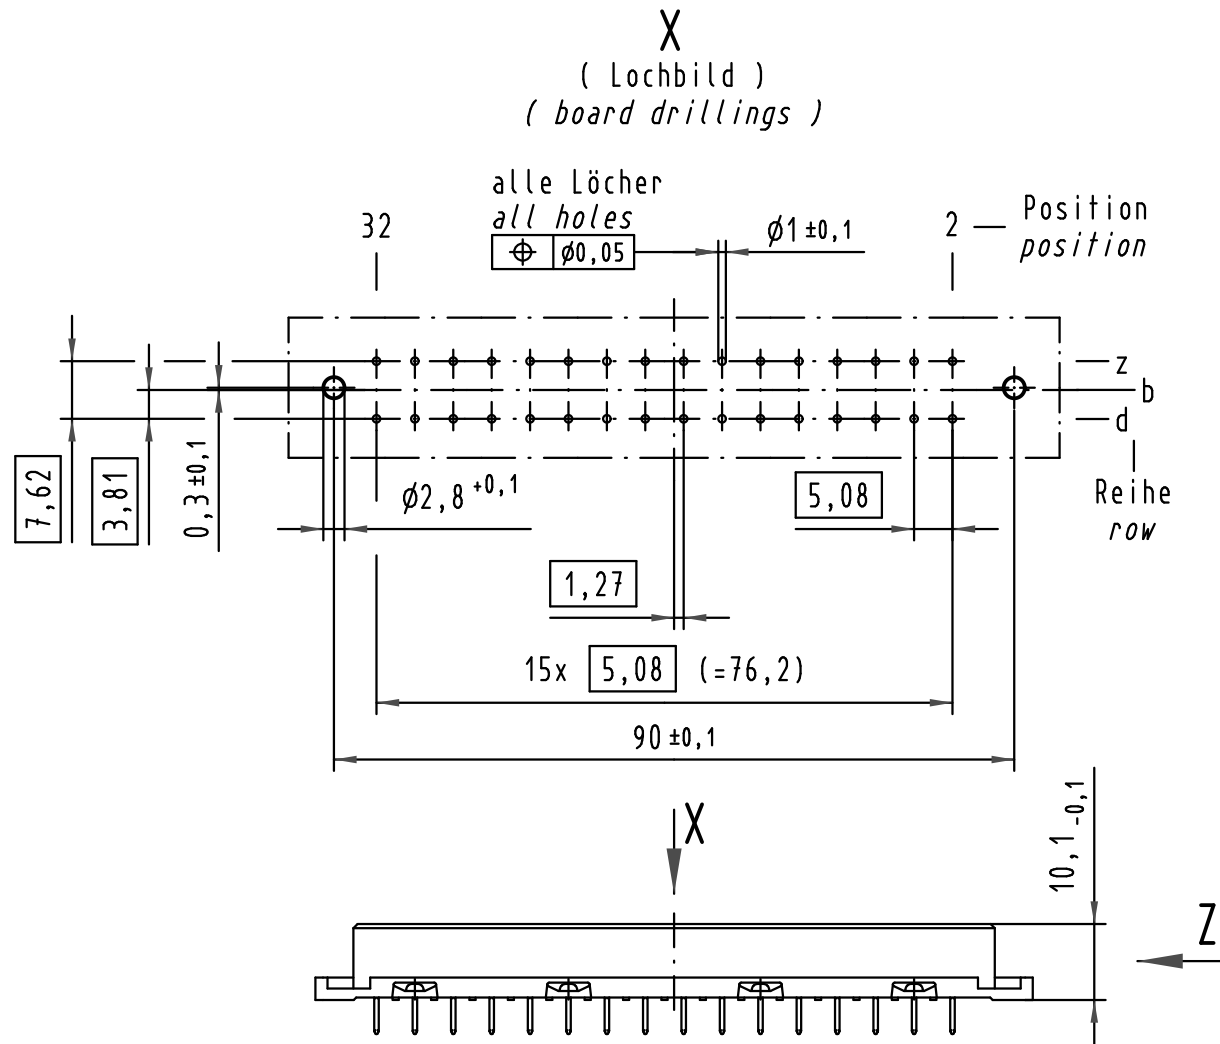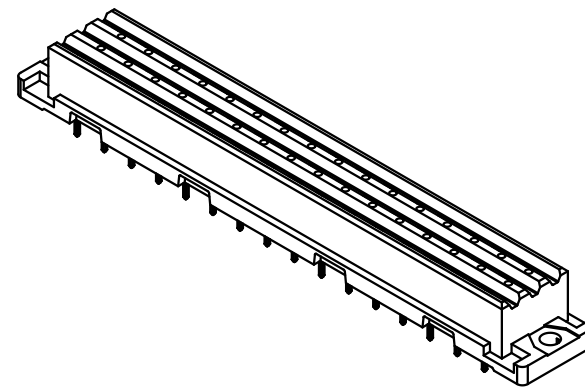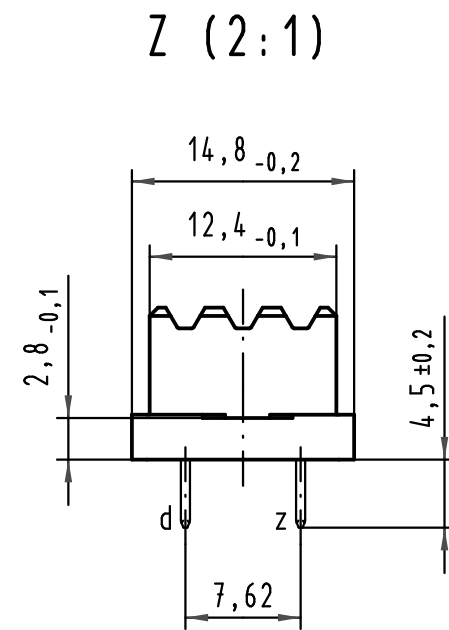

1 weitere Informationen siehe: DS 09 06 210 00 02
further information see: DS 09 06 210 00 02

 All Dimensions in mm Original Size DIN A 3			Techn. Character.			Nicht tolerierte Maß/Free size tolerances IEC 60603-2		
				Dat.	Name	Maßstab/Scale 1 : 1	Bauform F low-profile Federleiste Einlöt 4,5 32 pol. <i>type F low-profile female connector solder 4,5 32 pol.</i>	
			Detail.	20.03.03	Hage.			
			Insp.	20.03.03	kfoe			
36054	15.06.10	Hage.	Stand.					
36029	19.04.10	Hage.	HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP				TB 09 06 232 x894	
30910								
Mod.	Dat.	Name						
						Sub.	Blatt/ page	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[HARTING:](#)

[09062327894](#)