
MALLORY Mallory Sonalert Products Inc.	Part #	PK-27N35WQ B
Sales Outline Drawing	Revision	В

May not be suitable for all medical and aerospace applications. Specifications: Contact Mallory Sonalert to discuss your application.

<u> </u>	5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5 5
Oscillation Frequency (Hz)	$3500 \pm 500$
Operating Voltage (Vdc)	3 ~ 28
Rated Voltage (Vdc)	12
Current Consumption (mA/max)	15 at Rated Voltage
Sound Pressure Level (dB/min)	90 at 30cm at Rated voltage
Tone/Pulse Rate (Hz0	Constant
Operating Temperature (°C)	-20 <b>~</b> +70
Storage Temperature (°C)	-30 <b>~</b> +80
Housing	ABS 757 UL94HB plastic resin
	(Color: Black)
Lead Wires	28 AWG
Weight (Grams)	6.8
Condition by wave soldering (°C)	$245 \pm 5 / 3 \pm 0.5 \text{ sec}$
Condition by hand soldering (°C)	$350 \pm 20$ / within 5 sec
Options	For other options contact factory

RoHS Compliant

**Dimensions:** (units: mm)

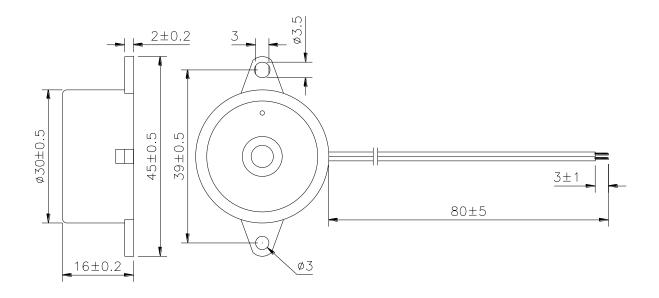

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mallory Sonalert:

PK-27N35WQ PK-20A38P-01Q