


Material	High Conductivity Seamless Copper Tube
Plating	Electro-Tin
Wire Size	2 STR/FLEX
Wire Type	Stranded Copper: Class B & C Compact, Class G, H, I, K, M, Locomotive
Wire Strip Length	1-7/16 in.
Stud Size	1/4 in.
UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
UL Temperature Rating	90° C
C.S.A Certified Wire Connector	Yes
Panduit Color Code on Barrel	BROWN
Panduit Die Index No. on Barrel	P33
Alternate Industry Die Index No. () on Barrel	(10)



Technical drawing of a Panduit LCCX2-14B cable connector. The drawing shows a side view of the connector with various dimensions and labels. Key features include:

- Main body diameter: $.70 \pm .04$
- Neck diameter: $.27 \pm .02$ DIA (2) PLS
- Total length: $3.01 \pm .06$
- Neck length: $.75 \pm .02$
- Main body length from neck: $.25 \pm .04$
- Main body labels: PANDUIT, 2 STR/FLEX LCCX2-14B
- Neck label: PANDUIT, BROWN DE P13 (10)
- Neck label: R.38 REF
- Color coded barrel markings

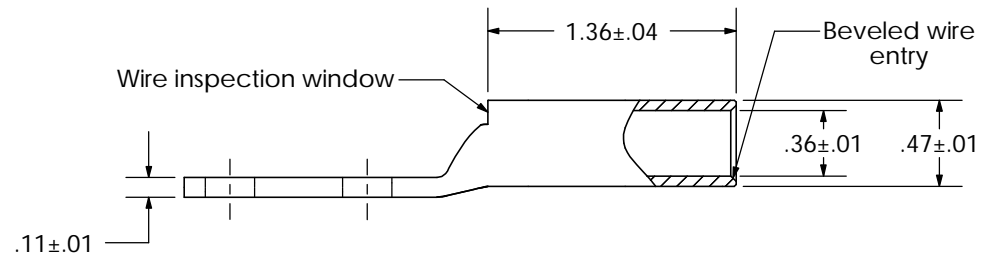

						<div><div>PANDUIT</div><div>CORP. TINLEY PARK, ILLINOIS</div></div>		
						LCCX2-14B-E		
00	6/03	SAC	SAC	RELEASED	10850	Copper Lug - Two-Hole, Long Flex Barrel with Window		
REV	DATE	BY	CHK	DESCRIPTION	ECN	SCALE	DRAWING NO / CAD FILE	
						N/A		LCCX2-14B-CUST

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[LCCX2-14B-E](#)