


|                                                      |                                                                                                                                                            |
|------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Material                                             | High Conductivity<br>Seamless Copper Tube                                                                                                                  |
| Plating                                              | Electro-Tin                                                                                                                                                |
| Wire Size                                            | 2/0 STR/FLEX                                                                                                                                               |
| Wire Type                                            | Stranded Copper: Class B & C,<br>Compact, Class G, H, I, K, M,<br>Locomotive                                                                               |
| Wire Strip Length                                    | 1-9/16 in.                                                                                                                                                 |
| Stud Size                                            | 1/4 in.                                                                                                                                                    |
| UL Listed Wire<br>Connector                          | Yes, for applications up to 35kv.<br>Consult cable manufacturer for<br>voltage stress relief instructions<br>with applications greater than<br>2000 volts. |
| UL Temperature<br>Rating                             | 90° C                                                                                                                                                      |
| C.S.A Certified<br>Wire Connector                    | Yes                                                                                                                                                        |
| Panduit Color Code<br>on Barrel                      | BLACK                                                                                                                                                      |
| Panduit Die Index No.<br>on Barrel                   | P45                                                                                                                                                        |
| Alternate Industry<br>Die Index No. ( )<br>on Barrel | (13)                                                                                                                                                       |



Technical drawing of a Panduit 2/0 STR/FLEX LCCX210-14AH cable head. The drawing shows a cross-section of the cable head with dimensions and labels. The head is rectangular with a rounded end. The label "PANDUIT" is on the left, and "2/0 STR/FLEX LCCX210-14AH" is in the center. The dimensions are: .96±.04 (height), .35±.04 (width of the label area), .63±.02 (width of the head), .27±.02 DIA (2) PLS (diameter of the rounded end), and .43 R Ref (radius of the rounded end).

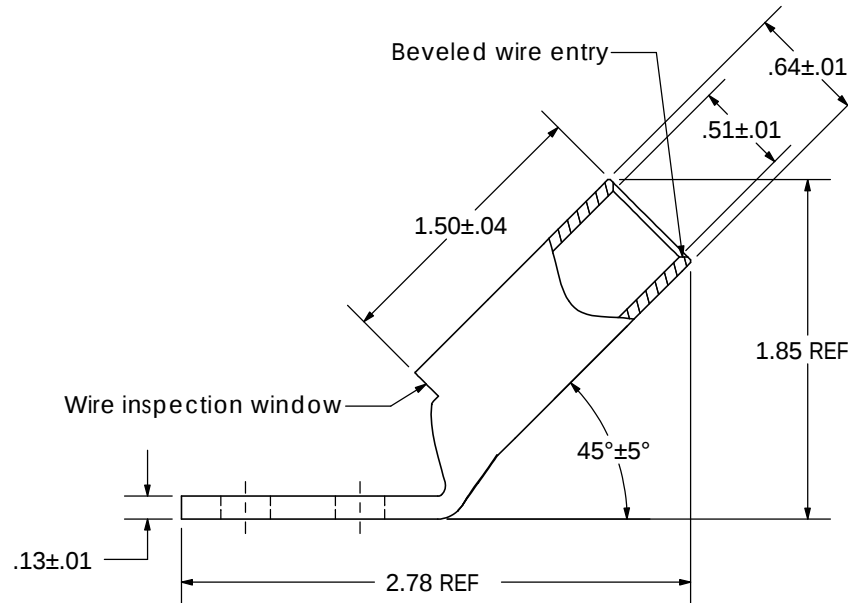

|     |      |     |     |             |       |                                                                       |                                            |
|-----|------|-----|-----|-------------|-------|-----------------------------------------------------------------------|--------------------------------------------|
|     |      |     |     |             |       | <div><div>PANDUIT</div><div>CORP. TINLEY PARK, ILLINOIS</div></div>   |                                            |
|     |      |     |     |             |       | LCCX2/0-14AH-X                                                        |                                            |
| 00  | 6/03 | SAC | SAC | RELEASED    | 10850 | Copper Lug - Two-Hole, Long Flex Barrel with Window, 45° Angle Tongue |                                            |
| REV | DATE | BY  | CHK | DESCRIPTION | ECN   | SCALE<br>N/A                                                          | DRAWING NO / CAD FILE<br>LCCX2_0-14AH-CUST |

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panduit:

[LCCX2/0-14AH-X](#)