

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	REVISED PER E.C.N. T-5959	86-1-13	I.M.
B	REVISED REDRAWN PER E.C.N. T-10097	88-5-17	345

NOTES:

1. PART DESCRIPTION: BRAID TERMINATOR ASSEMBLY


A. MATERIAL:

1. INSULATION SLEEVE: HEAT SHRINKABLE POLYVINYLIDENE FLUORIDE.
2. SOLDER RING: COMPOSITION Sn63, PER QQ-S-571.
3. TERMINATOR SHELL: BRASS ALLOY, PER QQ-B-626C.
4. INSERT: IMMERSION RESISTANT THERMOPLASTIC.

B. FINISH:

1. TERMINATOR SHELL: SOLDER - PLATED PER MIL-P-81728A
OVER NICKEL PER QQ-N-290.

 MARKING: "0056", YELLOW INK, RANDOM ORIENTATION.

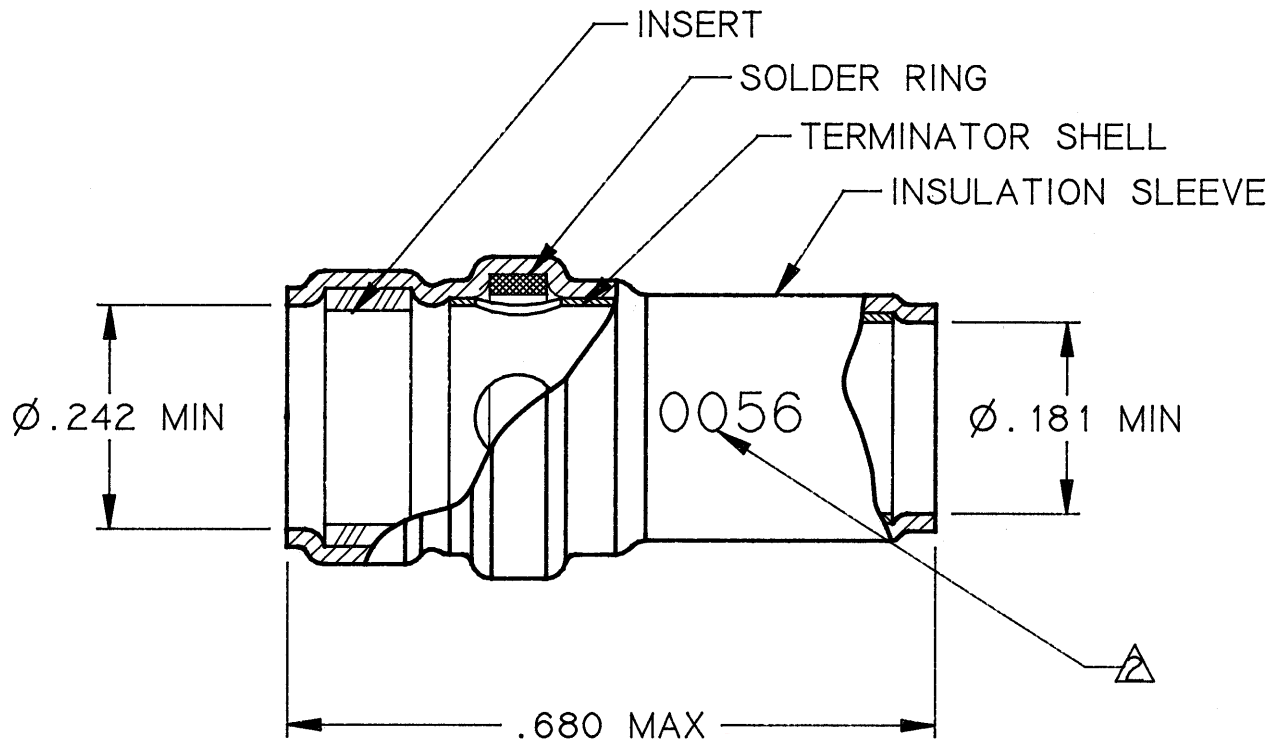

SPECIFICATION CONTROL DRAWING  Raychem Corporation 1988

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN INCHES.
METRIC DIMENSIONS ARE
IN BRACKETS.

DECIMALS
.XXX ± N/A [mm]
.XX ± N/A [mm]


ANGLES
.X ± N/A

WEIGHT
lbs [g]

DRAWN	RDL	88-5-13
CHECKED		
APPROVED	345	88-5-17
APPROVED		

CAD NAME
RDL E: \SCD\196305S

THIRD ANGLE
PROJECTION



Raychem

RAYCHEM CORPORATION
300 CONSTITUTION DRIVE
MENLO PARK, CALIFORNIA 94025

TITLE

**BRAID TERMINATOR
ASSEMBLY
WITH SEAL**

SIZE A	CODE IDENT. NO. 06090	DWG. NO. D-600-0056	REV B
------------------	---------------------------------	-------------------------------	-----------------

DO NOT SCALE THIS DRAWING

SHEET 1 OF 1

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[5-1191423-5](#) [D-600-0056](#)