

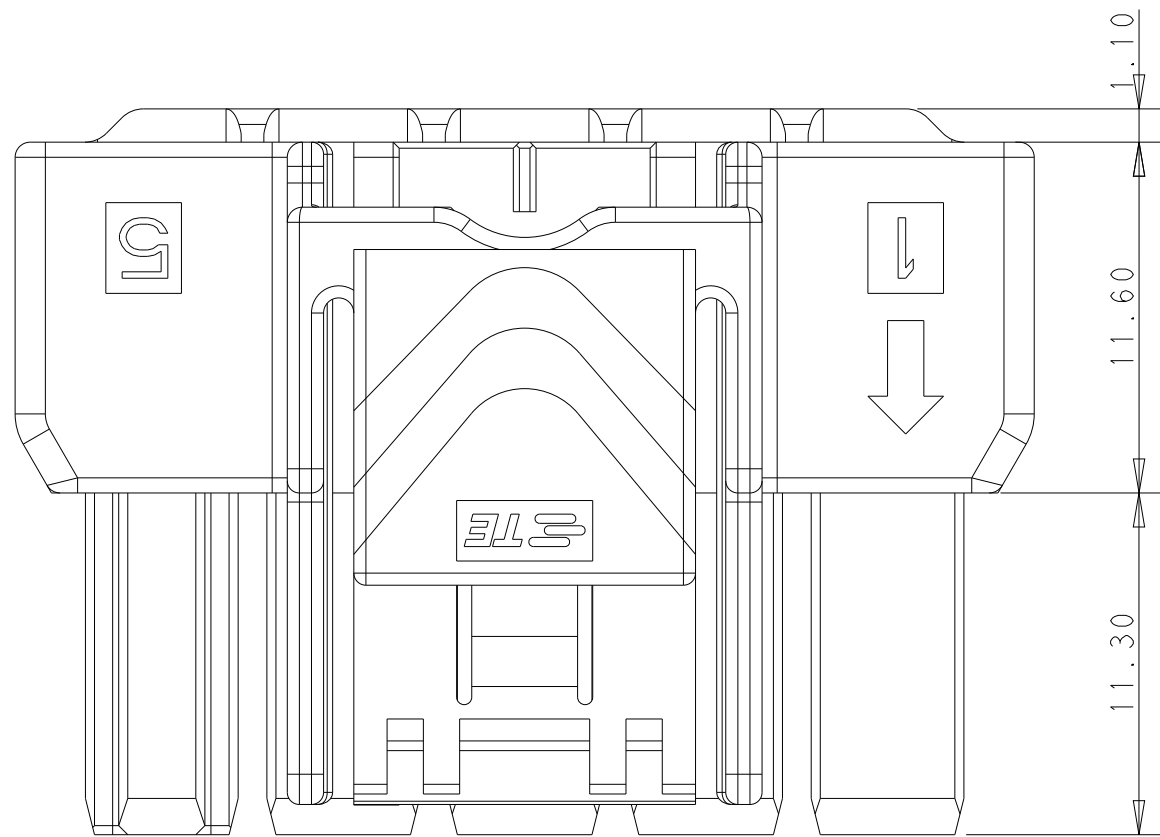
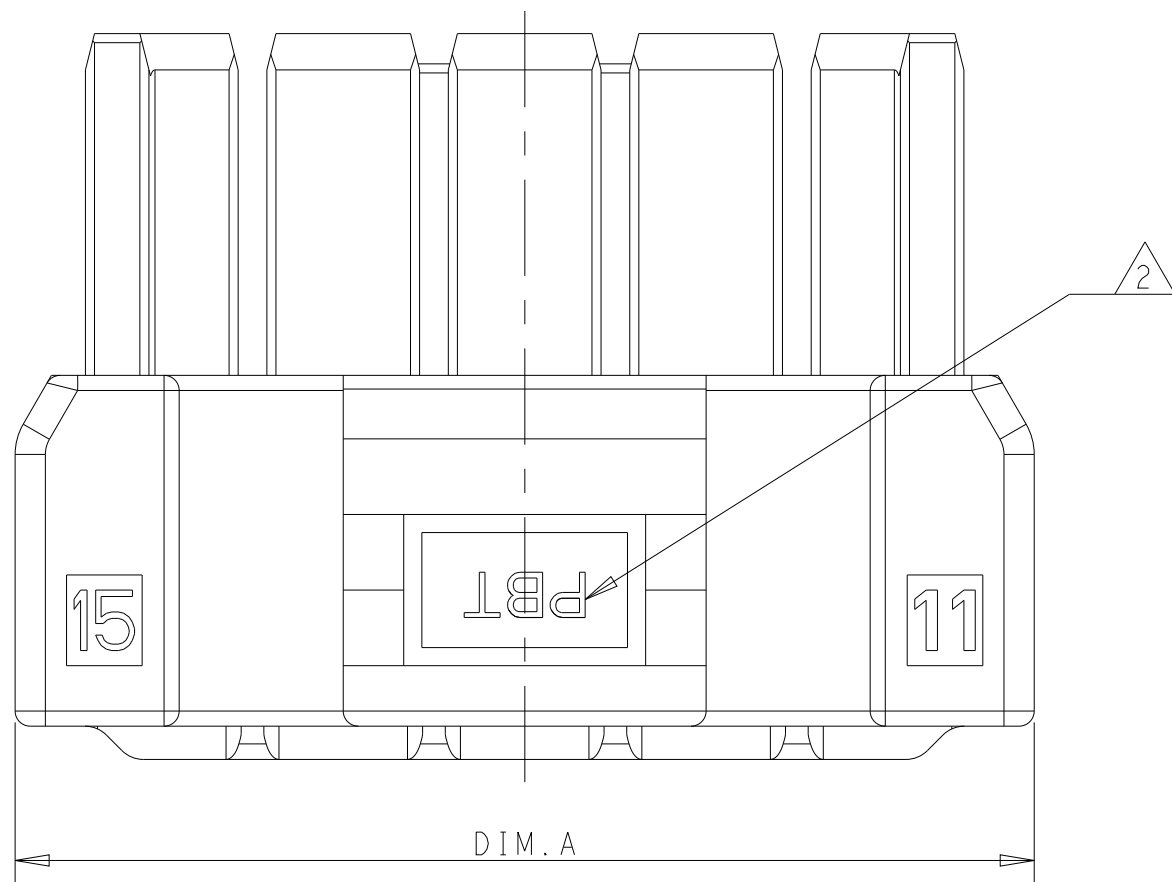
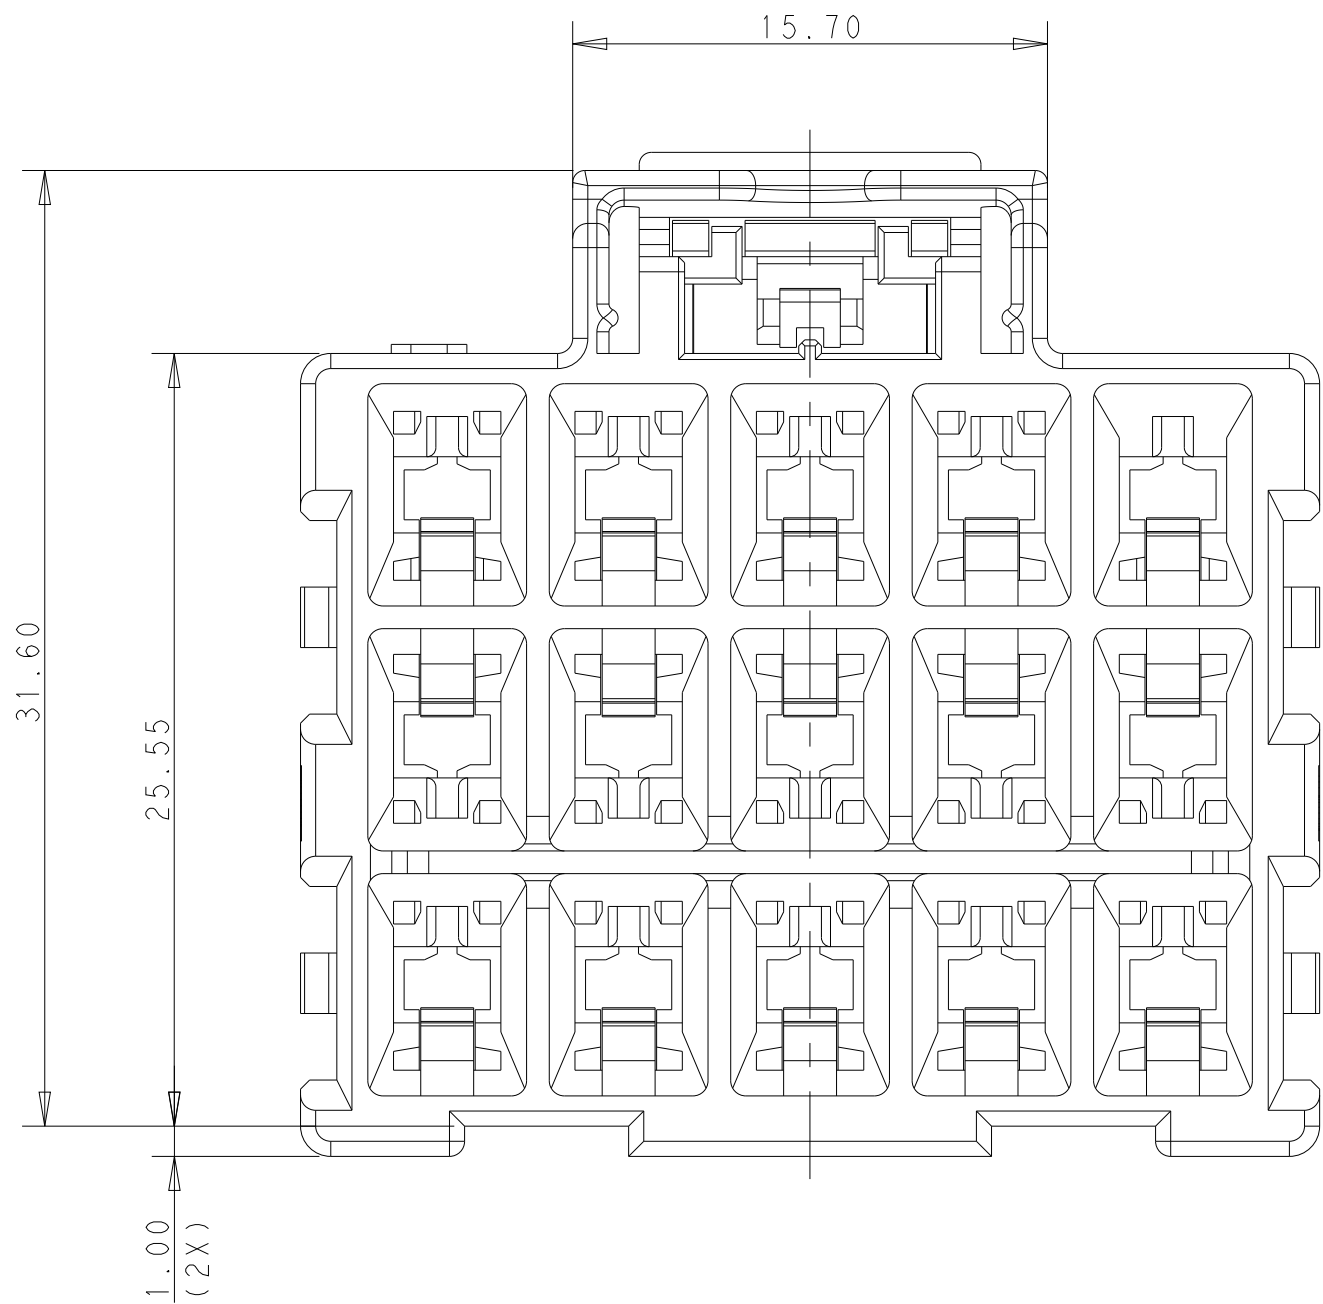


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
E		REVISED PER ECR-21-100678	08APR2021	SS	VS
F		REVISED PER ECR-20-100915	28APR2021	JP	VS

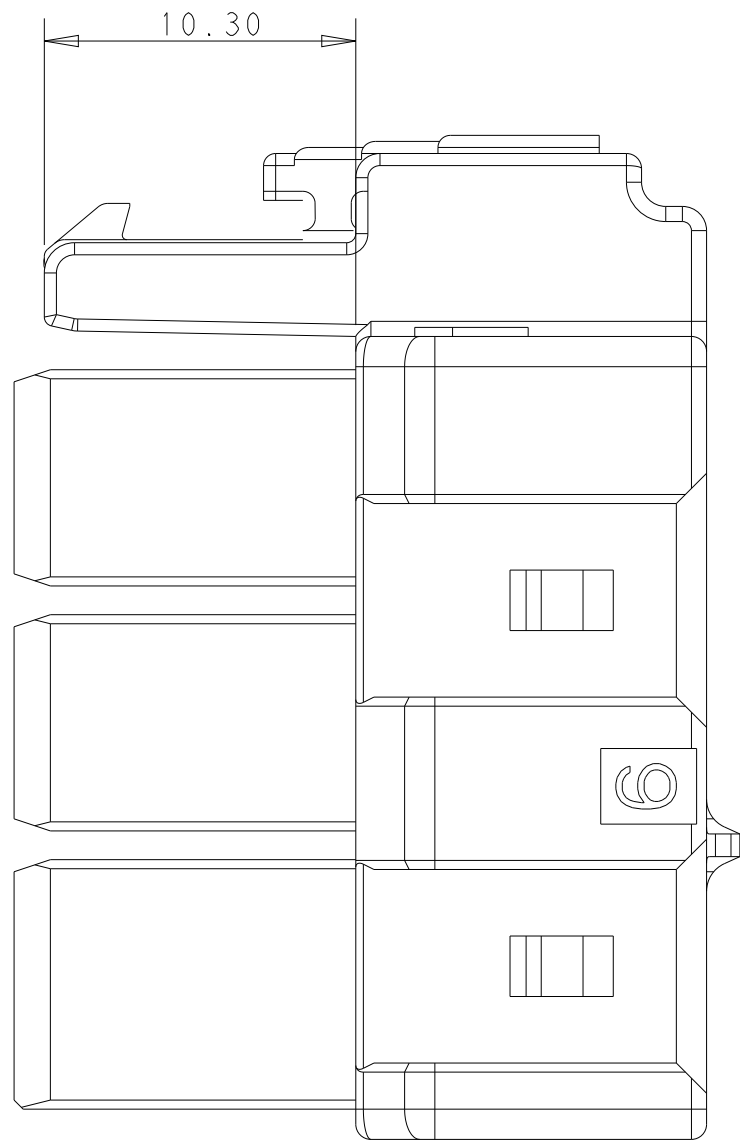



POS.	DIM. A
3*5	33.70
3*4	27.70
3*3	21.70

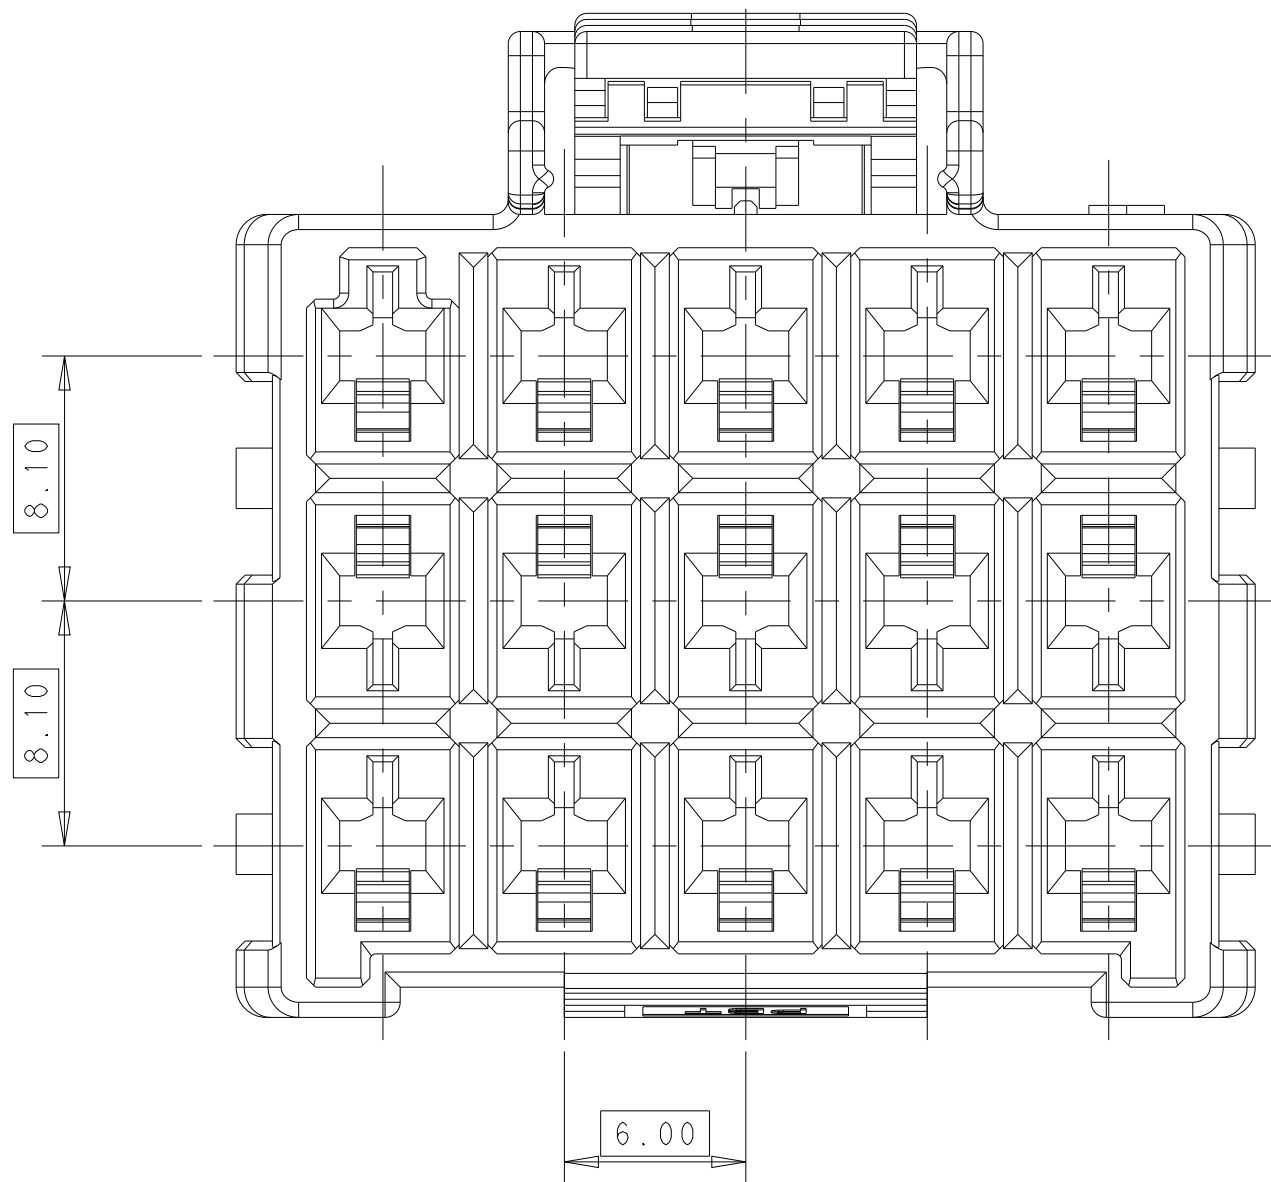



- ⚠ MATERIAL:
LEVEL 1: PBT, STANDARD TEMPERATURE 105°C
KEY A: NATURAL; KEY B: PURPLE; KEY C: BLUE; KEY D: YELLOW
LEVEL 2: PA66, HIGH TEMPERATURE 150°C
KEY A: LIGHT GREY; KEY B: RED; KEY C: BLACK; KEY D: NATURAL
- ⚠ MATERIAL MARK:
LEVEL 1: PBT, LEVEL 2: HDT
3. APPLICABLE CONTACT P/N
RECEPTACLE CONTACT: 1971237/1971779/81/83/85/87-*, 2238066-*
4. MATING CONN, P/N
CAP HSG: *-1971874/5-*
DOUBLE ROW LOCK PLATE: *-1971778-*; SINGLE ROW LOCK PLATE: *-1971777-*
- ⚠ GLOW WIRE COMPLIANT IN ACCORDANCE WITH IEC 60335-1. THIS IS BASED ON THE PRODUCT MEETING A GWEPT 850°C TEST AND RESIN GWIT GREATER THAN OR EQUAL TO 775°C.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN TOMMY WU	09JUL2012	 TE Connectivity	
		CHK HAPYE WU	09JUL2012		
DIMENSIONS:		APVD YUHONG MAO	09JUL2012	NAME PLUG HOUSING, TRIPLE ROW POWER TRIPLE LOCK	
mm		PRODUCT SPEC			
		108-106118		SIZE A1	
		APPLICATION SPEC			
		114-106118			
		FINISH			
		WEIGHT			
MATERIAL		Customer Drawing		CAGE CODE 100779	
		SCALE 3:1		DRAWING NO 1971876	
		SHEET 1		RESTRICTED TO -	
		OF 2		REV F	



REVISIONS				
P	LTR	DESCRIPTION	DATE	DWN
-	-	SEE SHEET 1	-	-

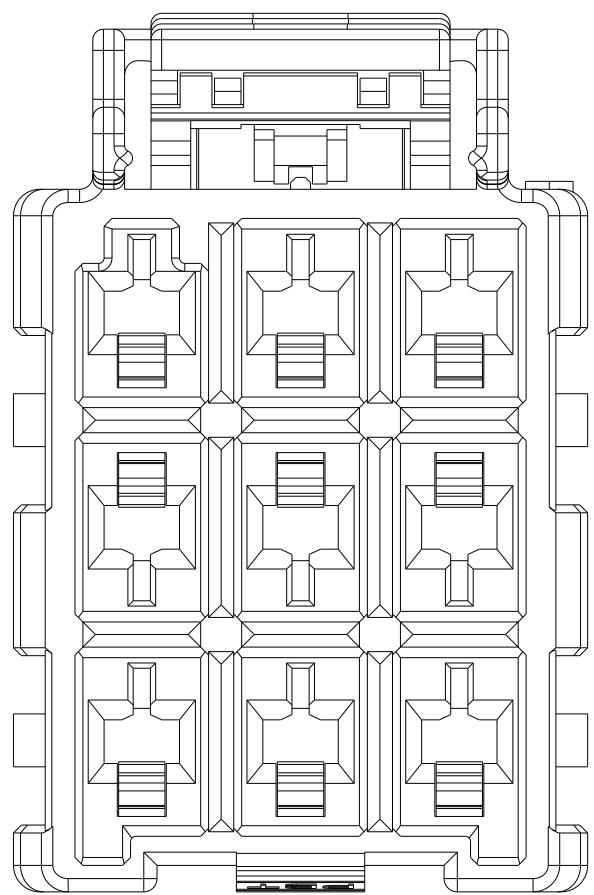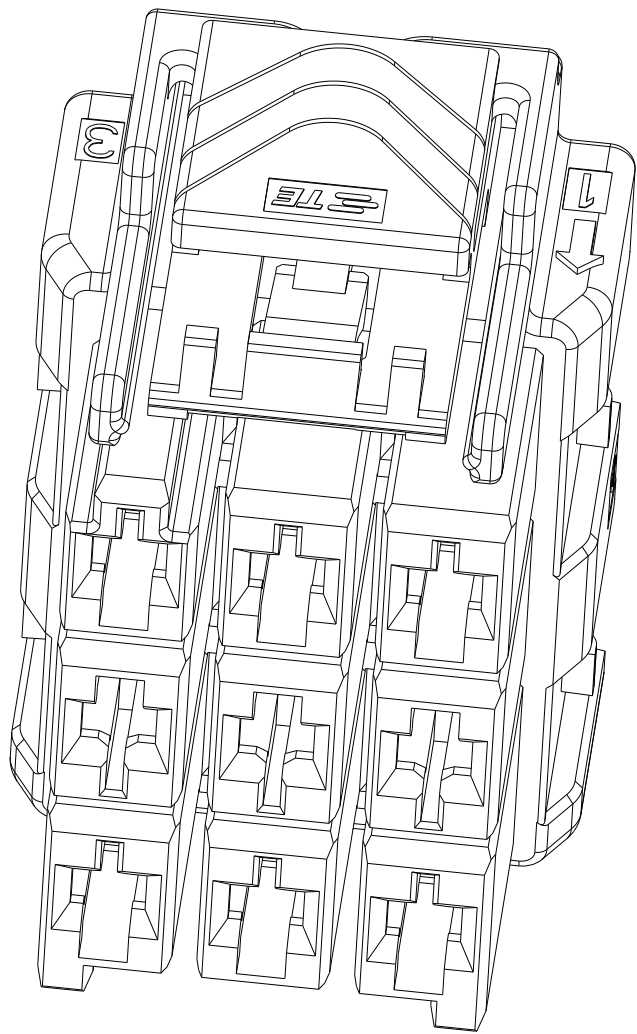

3*3 POSITIONS

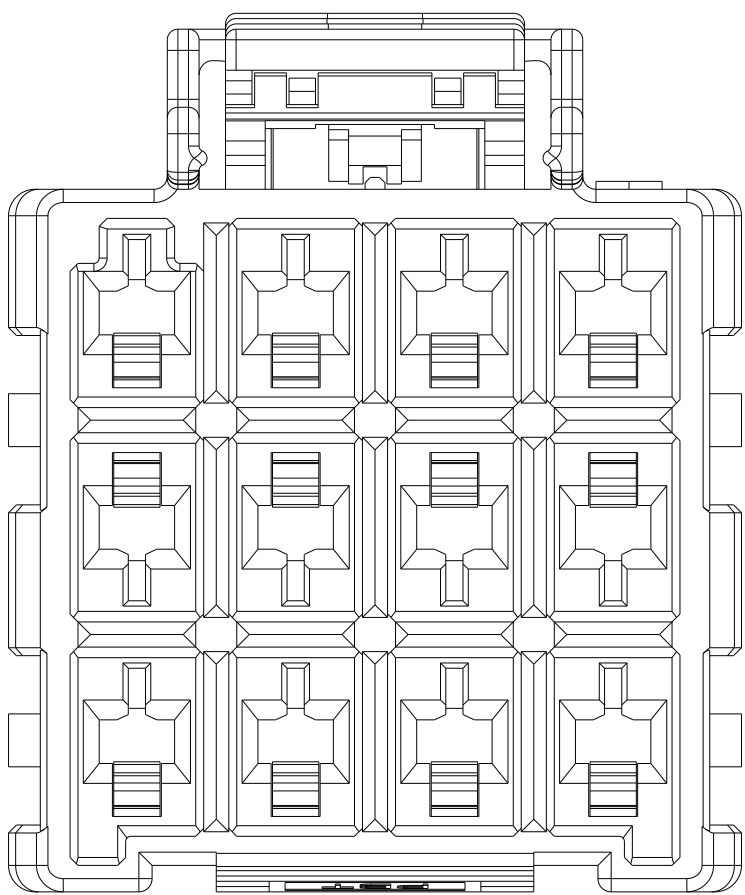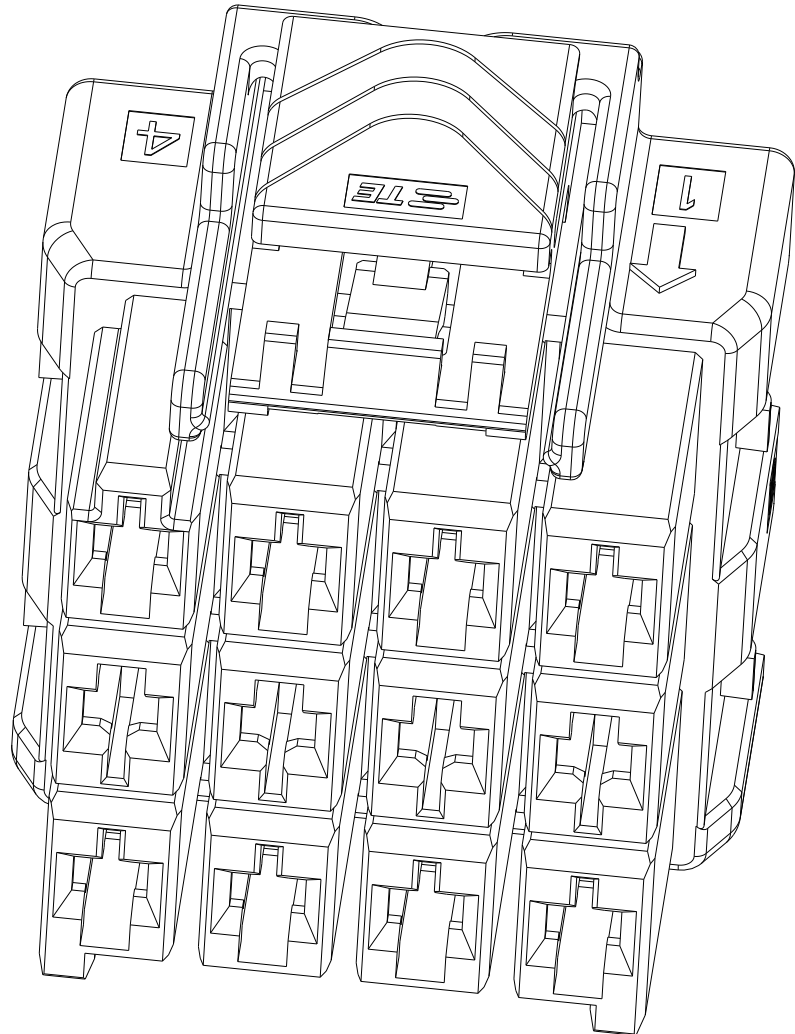


3*4 POSITIONS

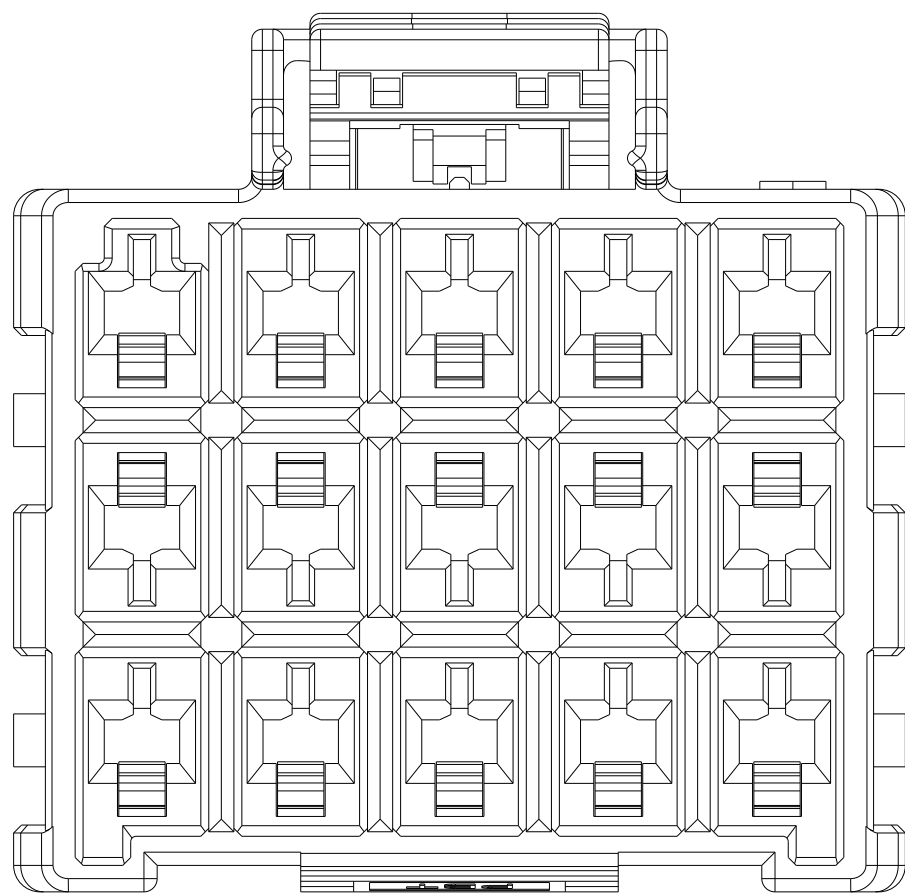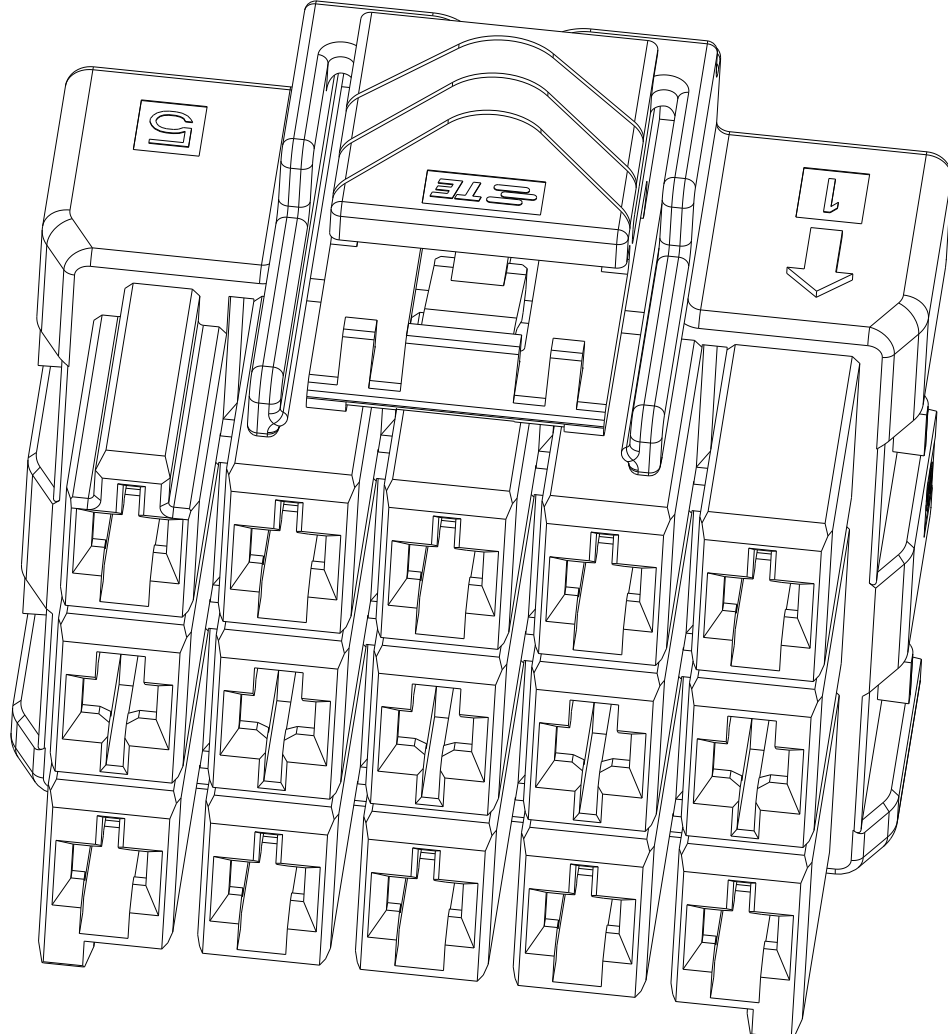


3*5 POSITIONS


3*5	LEVEL 1	KEY A	1-1971876-7
		KEY B	2-1971876-7
		KEY C	3-1971876-7
		KEY D	4-1971876-7
3*4	LEVEL 2 △5	KEY A	5-1971876-7
		KEY B	6-1971876-7
		KEY C	7-1971876-7
		KEY D	8-1971876-7
3*3	LEVEL 1	KEY A	1-1971876-4
		KEY B	2-1971876-4
		KEY C	3-1971876-4
		KEY D	4-1971876-4
3*3	LEVEL 2 △5	KEY A	5-1971876-4
		KEY B	6-1971876-4
		KEY C	7-1971876-4
		KEY D	8-1971876-4
3*3	LEVEL 1	KEY A	1-1971876-3
		KEY B	2-1971876-3
		KEY C	3-1971876-3
		KEY D	4-1971876-3
3*3	LEVEL 2 △5	KEY A	5-1971876-3
		KEY B	6-1971876-3
		KEY C	7-1971876-3
		KEY D	8-1971876-3
POS.	MATERIAL	KEY	P/N

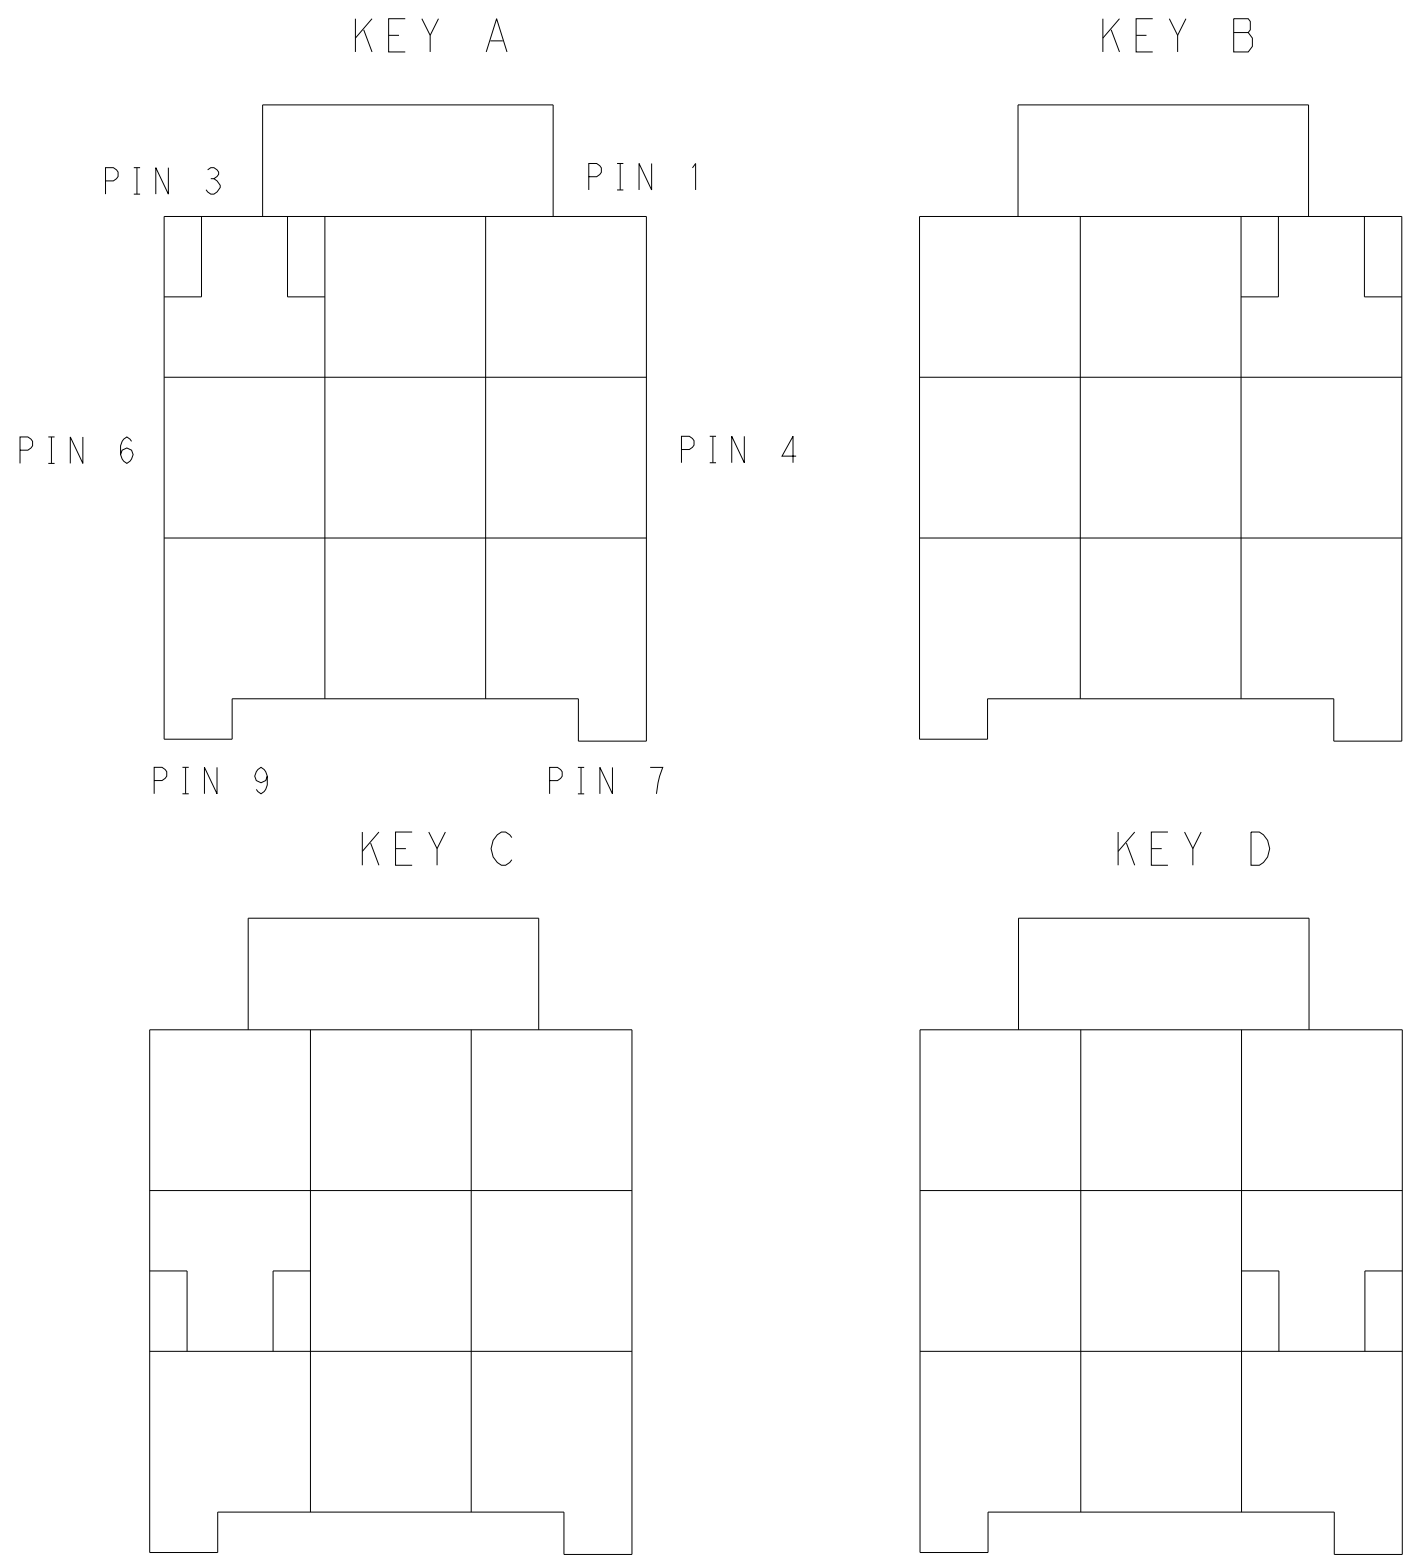

KEYING FOR 3*3 POS.

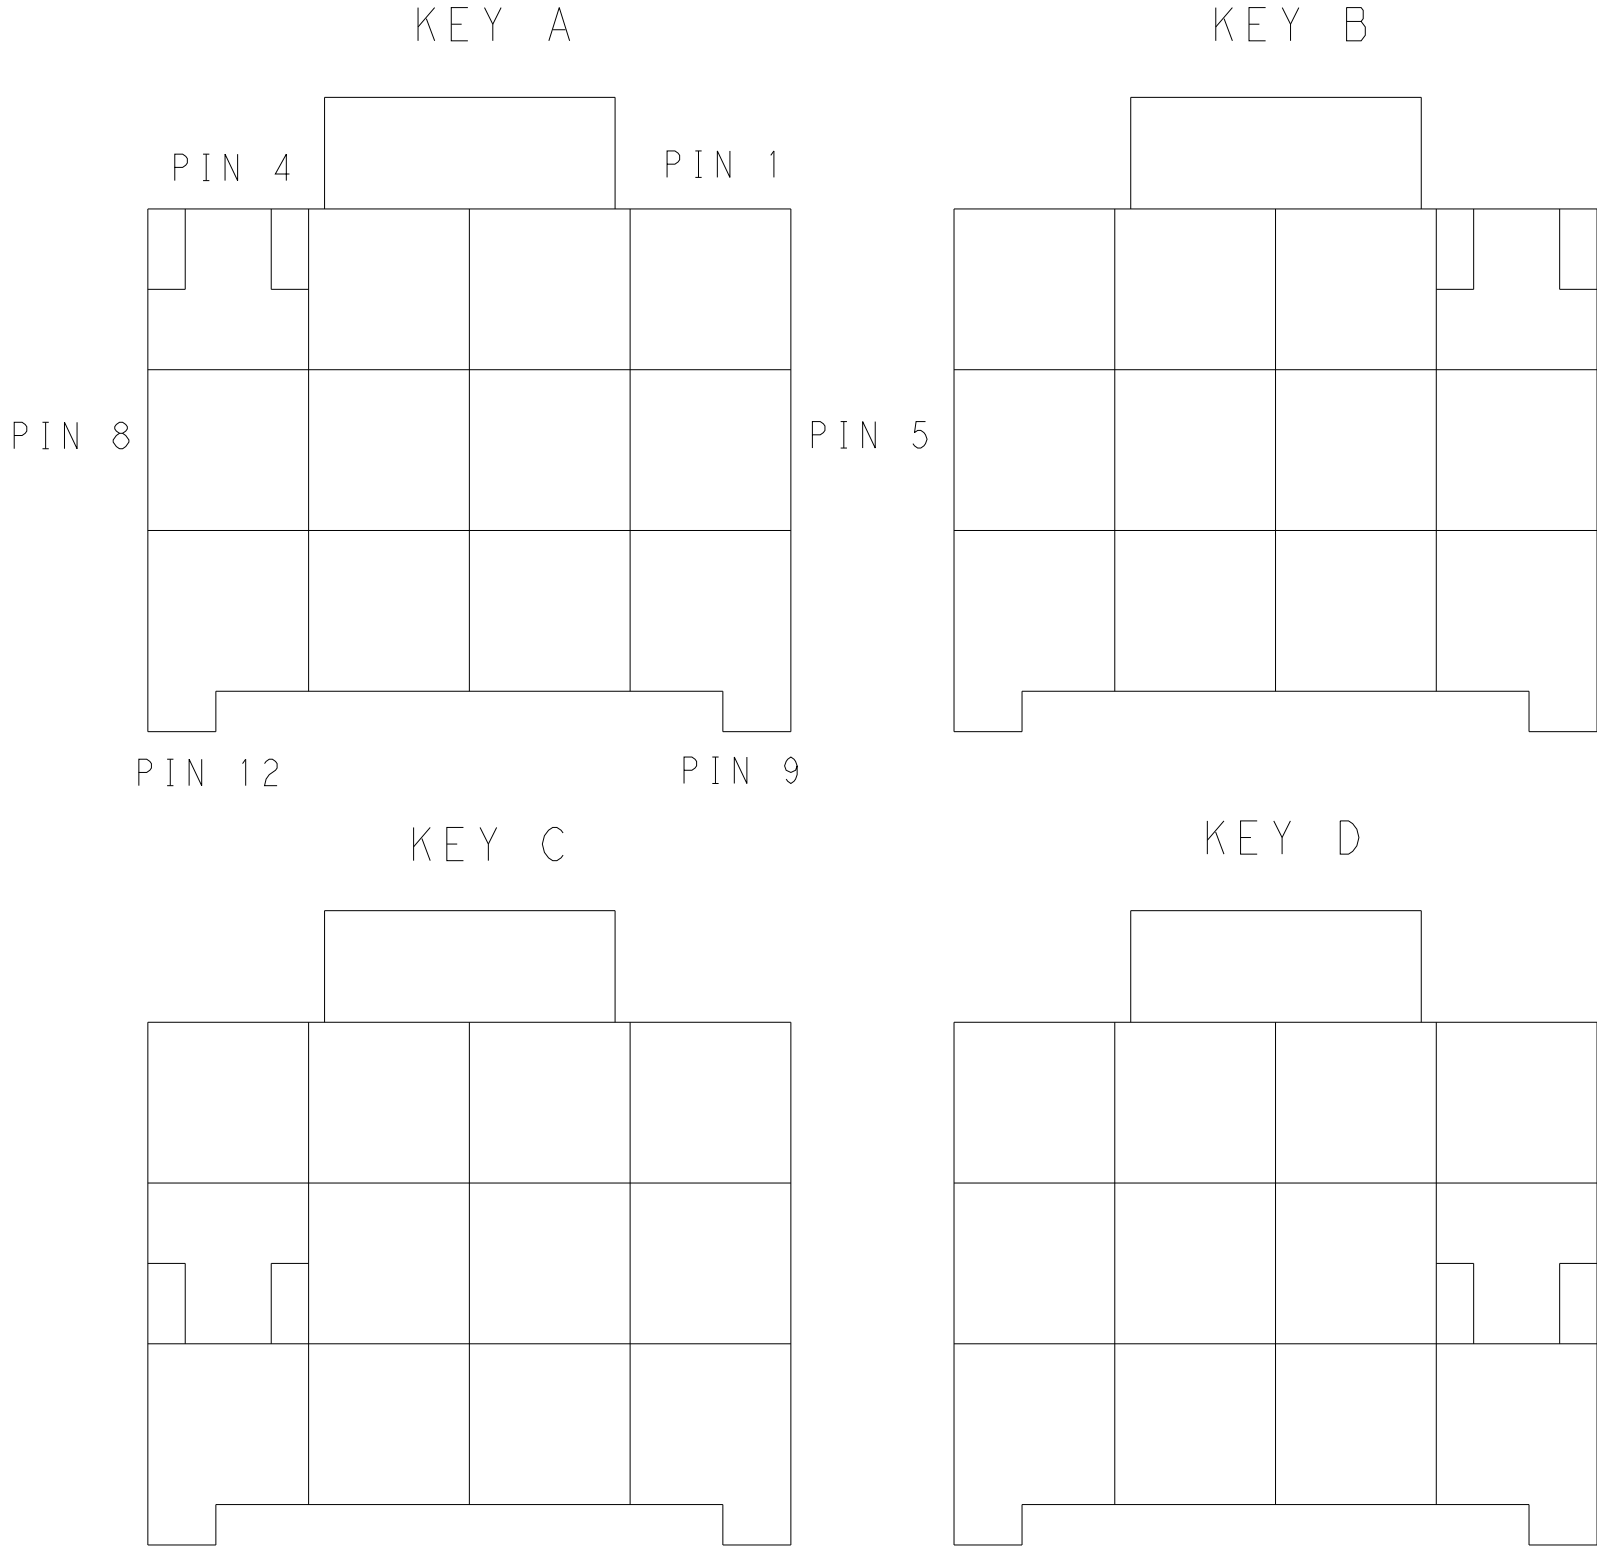

KEYING FOR 3*4 POS.

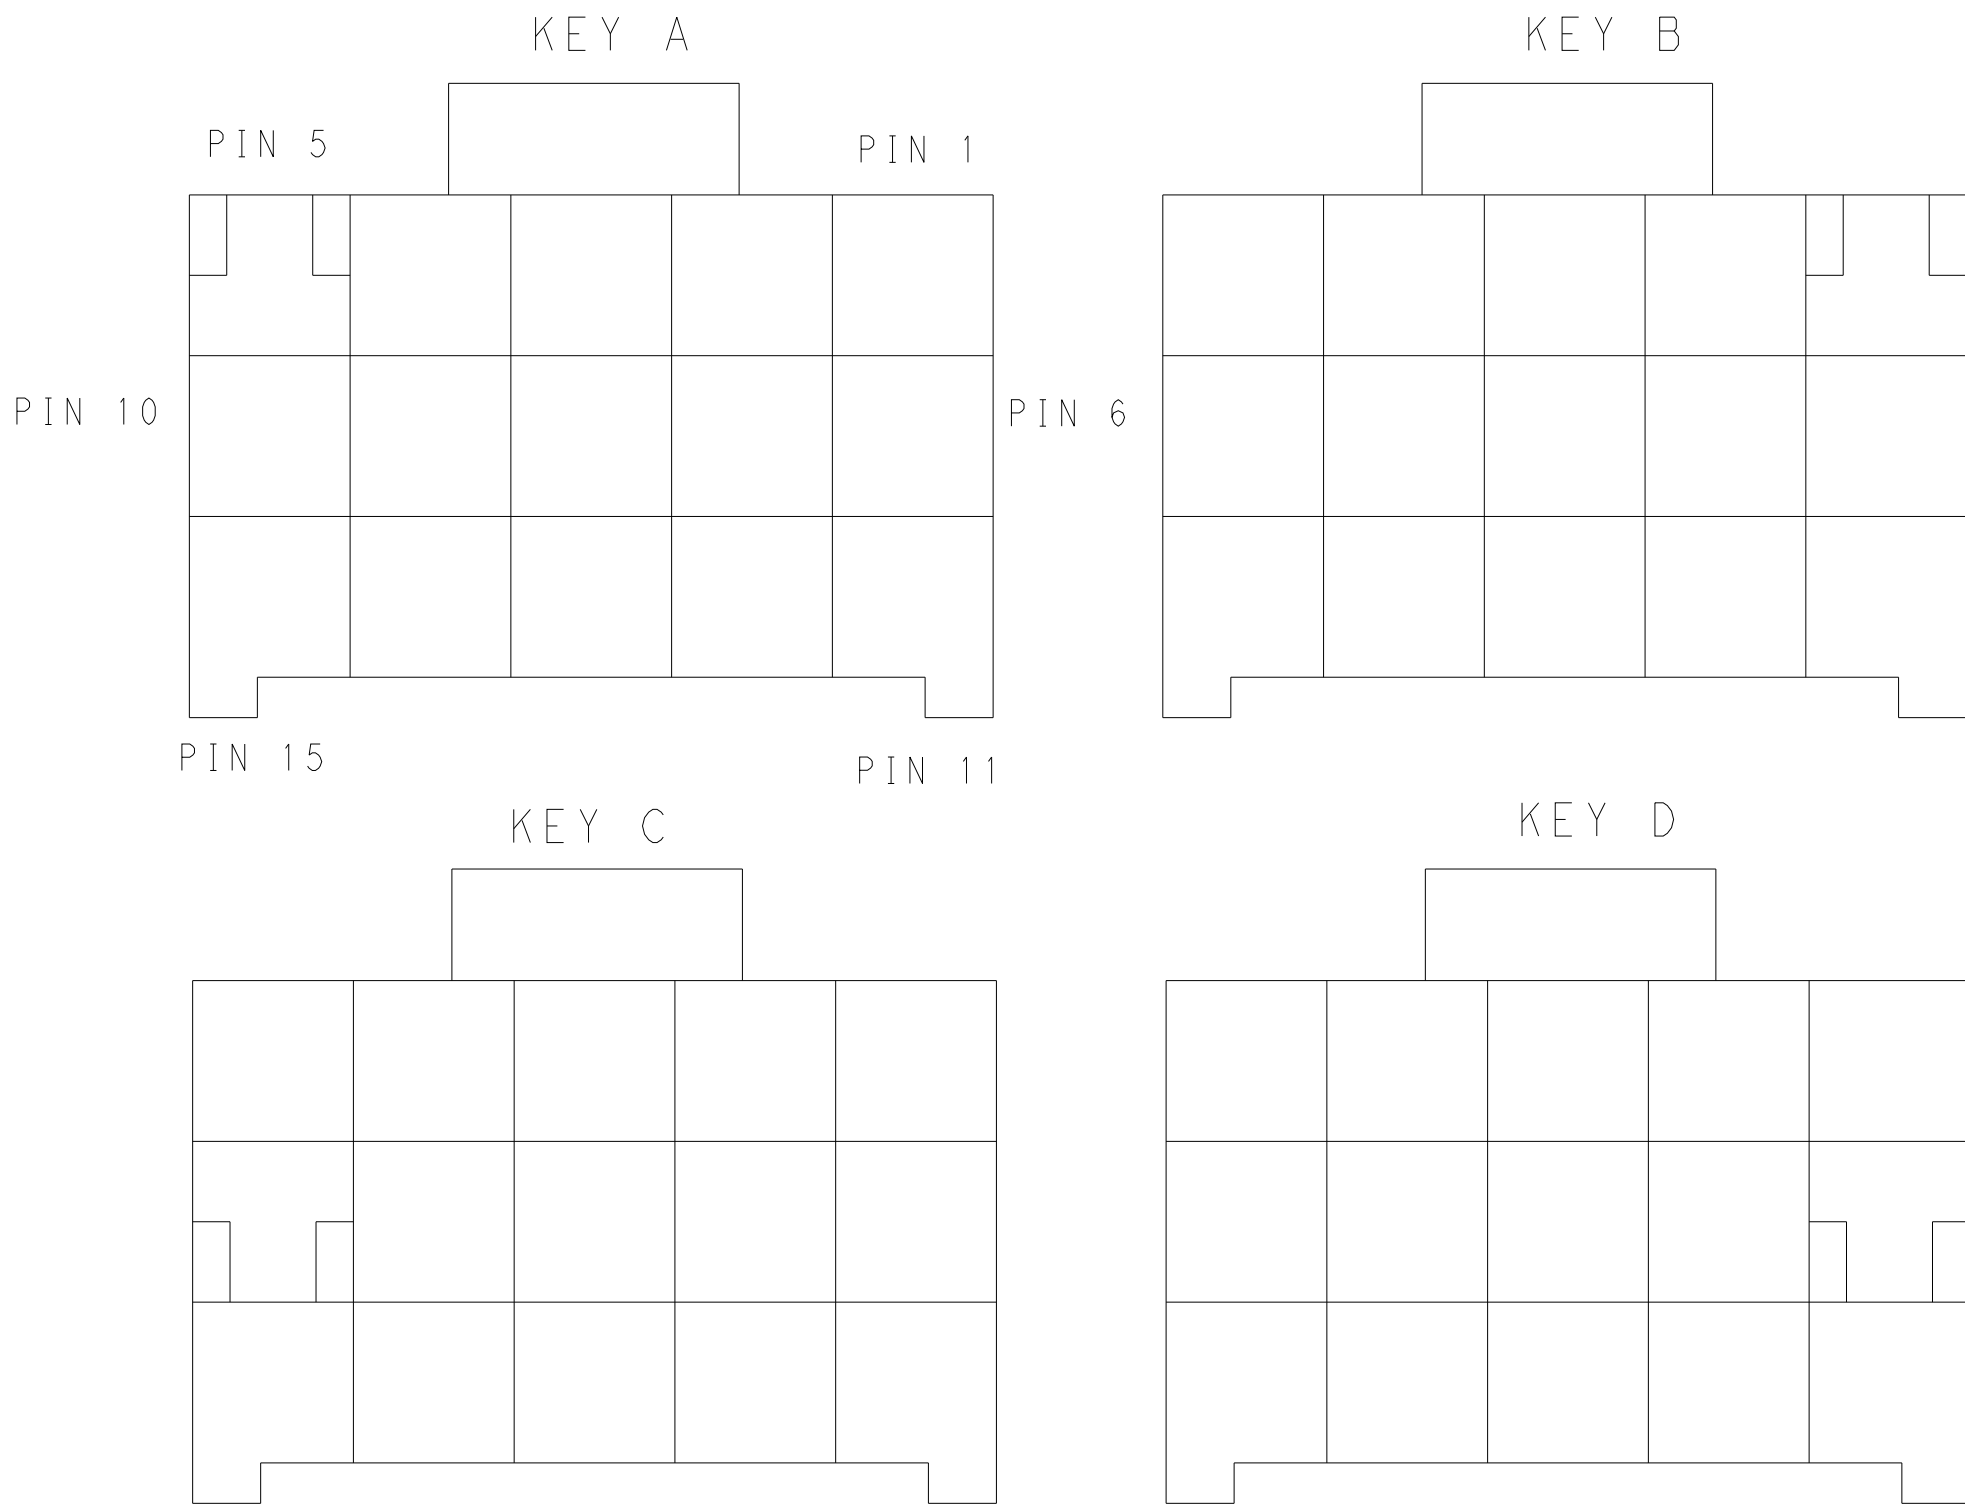

KEYING FOR 3*5 POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN	TOMMY WU		09JUL2012		TE TE Connectivity PLUG HOUSING, TRIPLE ROW POWER TRIPLE LOCK							
DIMENSIONS: mm 			CHK	HAPYE WU		09JUL2012									
			APVD	YUHOONG MAO		09JUL2012									
			PRODUCT SPEC												
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±.1 1 PLC ±0.35 2 PLC ±0.25 3 PLC ±.1 4 PLC ±.1 ANGLES FINISH ±			NAME				SIZE		CAGE CODE	DRAWING NO	RESTRICTED TO				
			YUHOONG MAO				108-106118		APPLICATION SPEC		A100779C-1971876		-		
							114-106118		WEIGHT		-		-		
MATERIAL			Customer Drawing				SCALE		-	SHEET	2	OF	2	REV	F

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[2-1971876-3](#)