
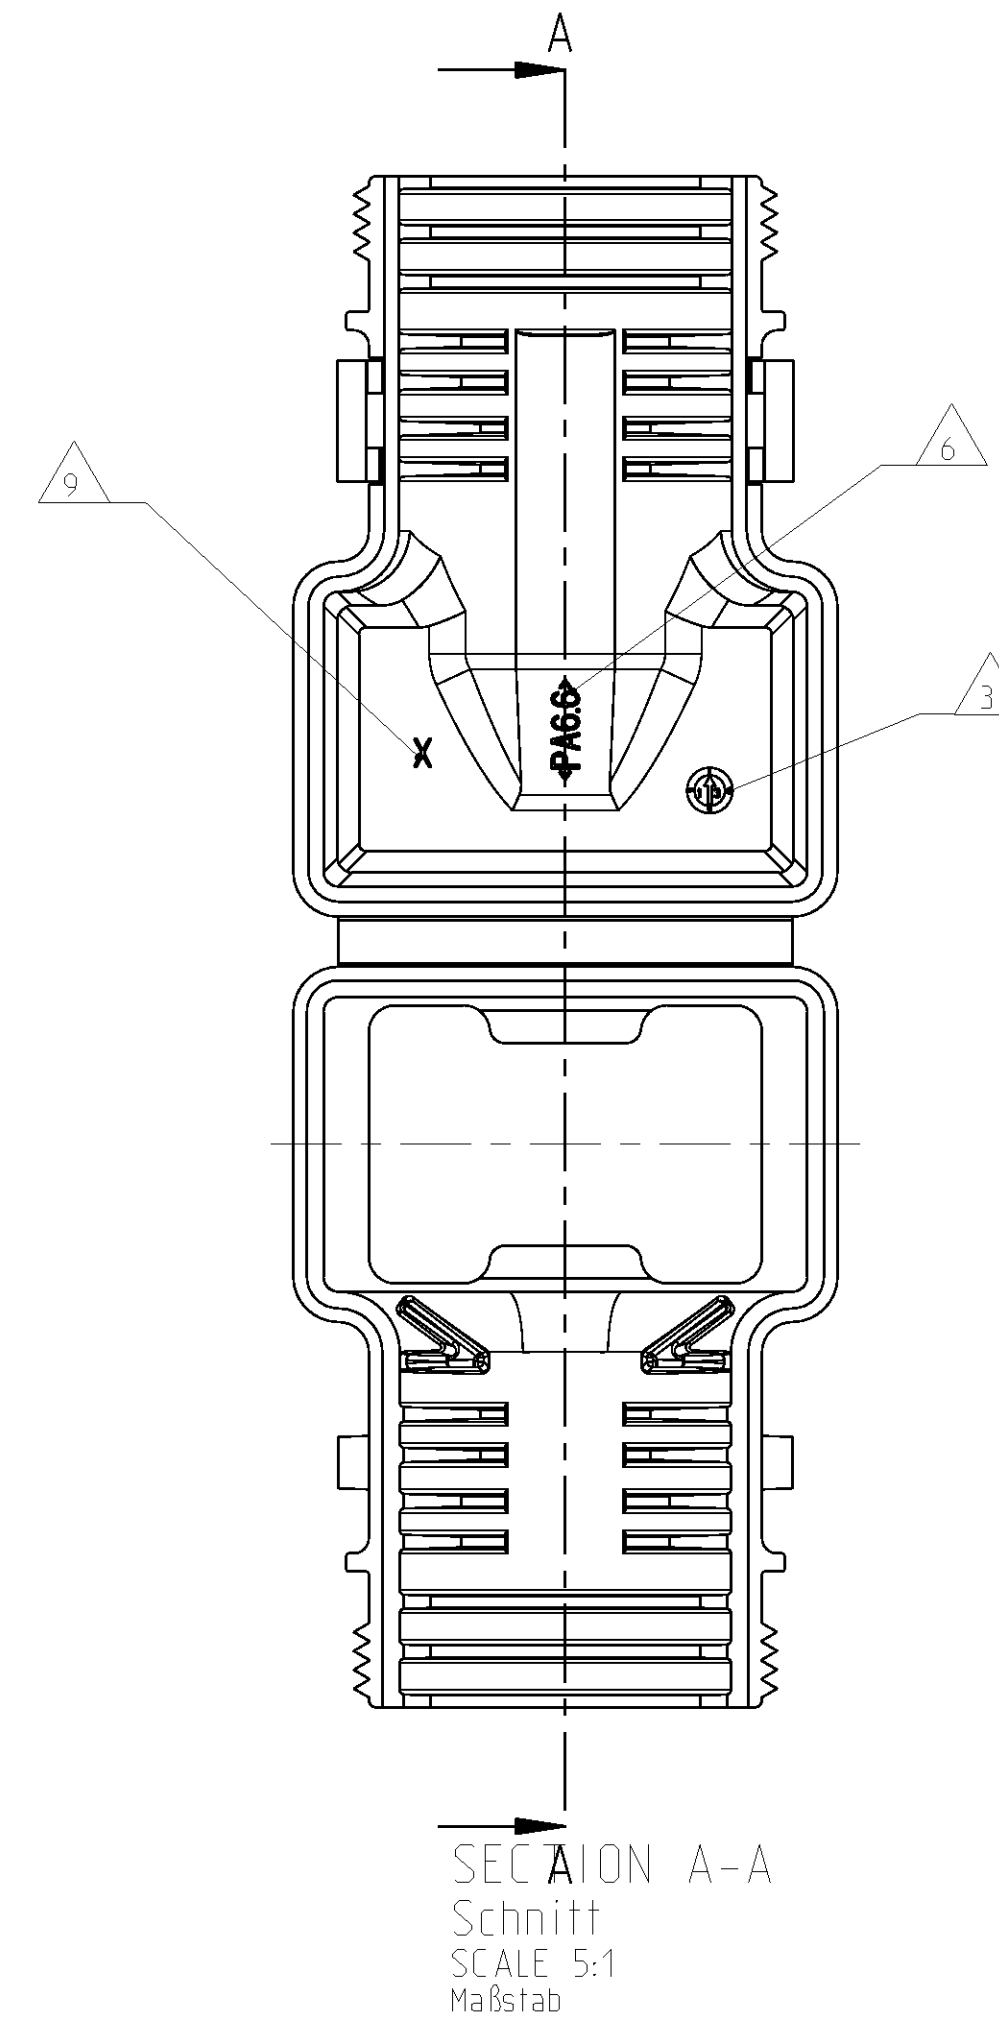


NOTES
Bemerkungen



Technical drawing of a DEUTSCH 1011-248-1205 cable gland. The drawing shows a side view of the component with various dimensions and callouts.

Key dimensions and features:


- Maximum length: ~ 36 max)
- Diameter: $\varnothing 26$
- Thread: $M28 \times 3 \text{ P1.25}$
- Mounting bracket height: ~ 18.4
- Bracket thickness: $(h \sim 1.25)$
- Bracket width: 9
- Callout 1: Points to the mounting bracket.
- Callout 2: Points to the cable clamping mechanism.
- Callout 7: Points to the cable entry point.
- Brand name: DEUTSCH
- Model number: 1011-248-1205

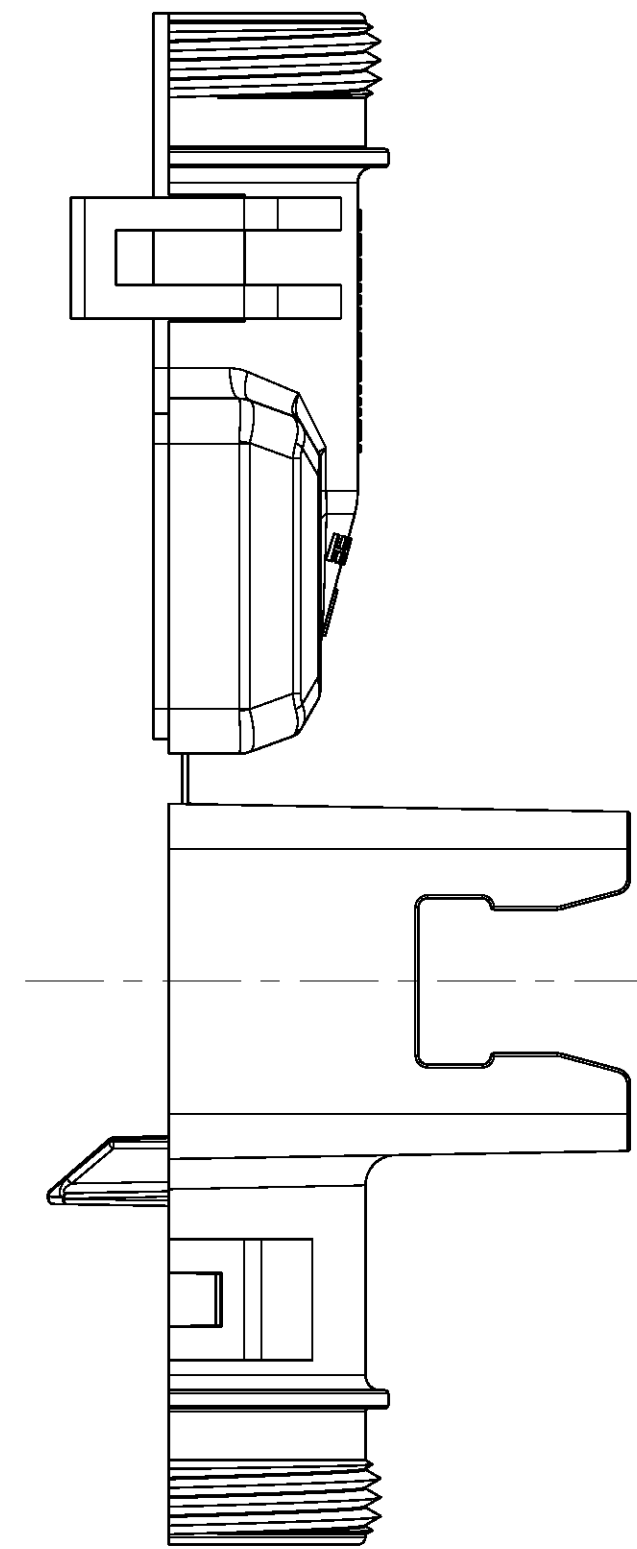

11 BASED ON THE HINGE MECHANISM OF THE CAP,
THE DELIVERY CONDITION CAN BE DIFFERENT
TO THE SHOWN DELIVERY CONDITION.
Basierend auf den Klappmechanismus der Kappe, kann der
Lieferzustand von der dargestellten Ansicht abweichen.

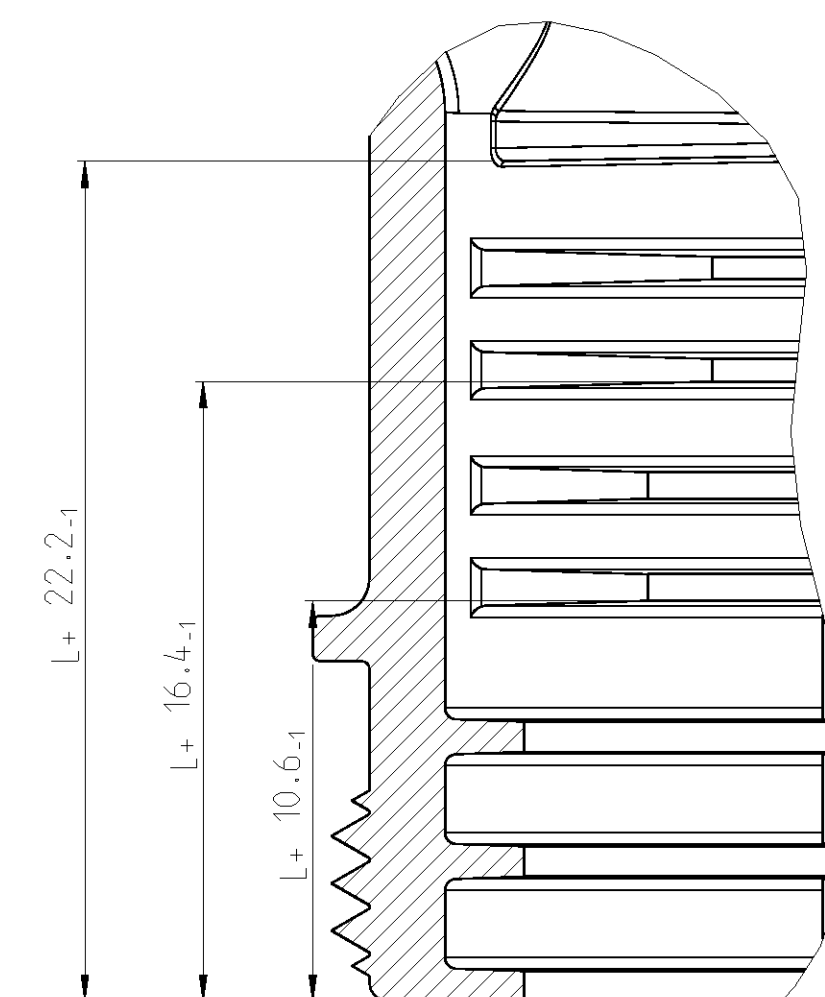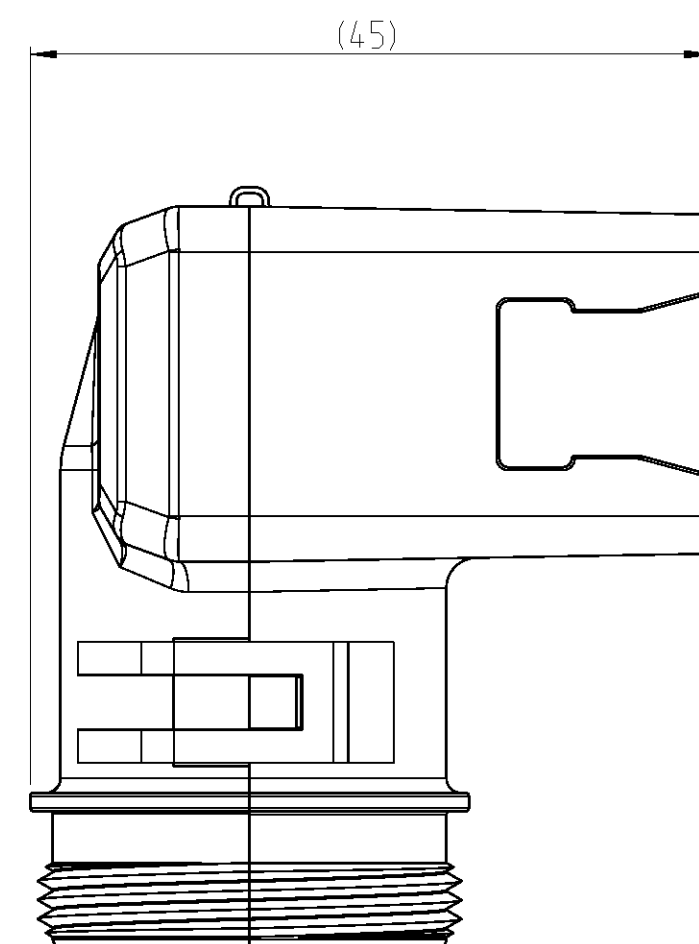

L+ = ADD LENGTH FOR CORRUGATED TUBE
zus. Länge des Wellrohres

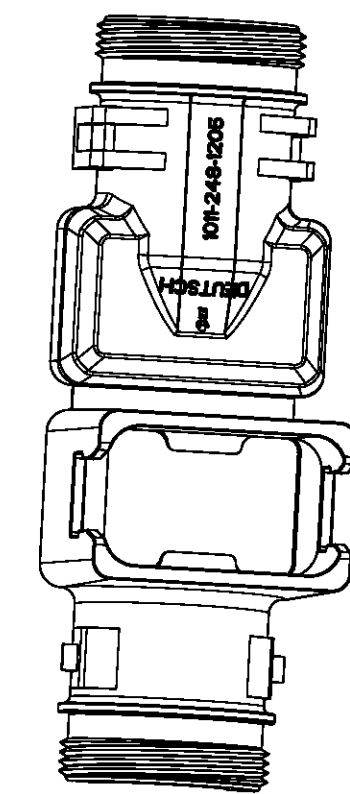SCALE
Maßstab

TOLERANCES UNLESS OTHERWISE SPECIFIED ACC. TO DIN 9010-140 (CENTRIC TO NOMINAL DIMENSION, EDITION 1992-11) SHALL APPLY. Toleranzenaußen nach DIN 9010-140, Ed. 11 der Ausgabe 1992-11.			
DIESE ZEICHNUNG IST EIN KONTROLLIERTES DOKUMENT. BEMASSUNGEN UND TOLERANZEN GEMÄSS GPS (ISO STANDARDS).			
THIS DRAWING IS A CONTROLLED DOCUMENT. DIMENSIONING AND TOLERANCING PER GPS (ISO STANDARDS).		DIM. AS F CKR LINZER C FERBERWFC PRODUCT SPEC PRODUCT SPEC APPLICATION SPEC VERBETUNGSSPEZ.	
DIMENSIONS: MASSEINHEITEN: (MM)		TOLERANCES UNLESS OTHERWISE SPECIFIED: ALLGEMEINE TOLERANZEN: (CC TO ISO 8013)	
MATERIAL: SEE TABLE Siehe Tabelle		FINISH/ROHSFLÄCHE: SEE TABLE Siehe Tabelle	
WEIGHT GEWICHT		SEE TABLE	
Customer Drawing			

 TE Connectivity	
NAME COVER, DT06-12S-BS90 Kappe, DT06-12S-BS90 BACKSHELL 90 DEGREE	
SIZE CASE CODE DRAWING NO. TECH. SPEC.	RESTRICTED TO AIR PUR -
AP 100779 06-1011 248 1205	
REVISION	
ZKINDENTFEHUNG ZKINDENTFEHUNG	SHEET 1 OF 1 REV A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1011-248-1205](#)