SAFETY DRGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283

CSA CERTIFIED: CSA 22.2, # 0,0.4,8

VDE APPROVED: EN 133 200

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 15 AMP, 120/250 VAC,

10 AMP/40°C, 250 VAC

LINE FREQUENCY:

MAXIMUM LEAKAGE CURRENT,

DIFF.

dВ

EACH LINE TO GROUND:

24.0 µA @ 120V 60Hz 41.5 µA @ 250V 50Hz

BPERATING AMBIENT TEMP. RANGE: -10°C TD +40°C @ RATED CURRENT, In.

IN AN AMBIENT, T_0 , HIGHER THAN 40°C, THE MAXIMUM DEERATING CURRENT, T_0 , IS AS FOLLOWS: $T_0 = T_0$, $T_0 = T_0$ $I_0 = I_r -$

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS @ 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR 8 SECONOS

CUSTOMER DRAWING CATALOG # 15SRB8-T ECN # TAPPRVD. DATE PJO 08NDV07

TEST SPECIFICATIONS:

INDUCTANCE: N/A mH

CAPACITANCE: (MEASLRED @ IKHz, 0.250VAC MAX., 25°C±1°C) LINE TO GROUND: 330pF ± 20%

LINE TO LINE: N/A DISCHARGE RESISTOR N/A

L/G AND L/L I.R.

NO DISCHARGE RESISTOR: 5000M△ (MIN.) @ 100VDC.

20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500 VAC FDR 1 MINUTE 1450 VDC FDR I MINUTE I INF TO LINE:

FILTER APPROVAL:


THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

08. 8X: 00

15SRB8-T

e.in

1

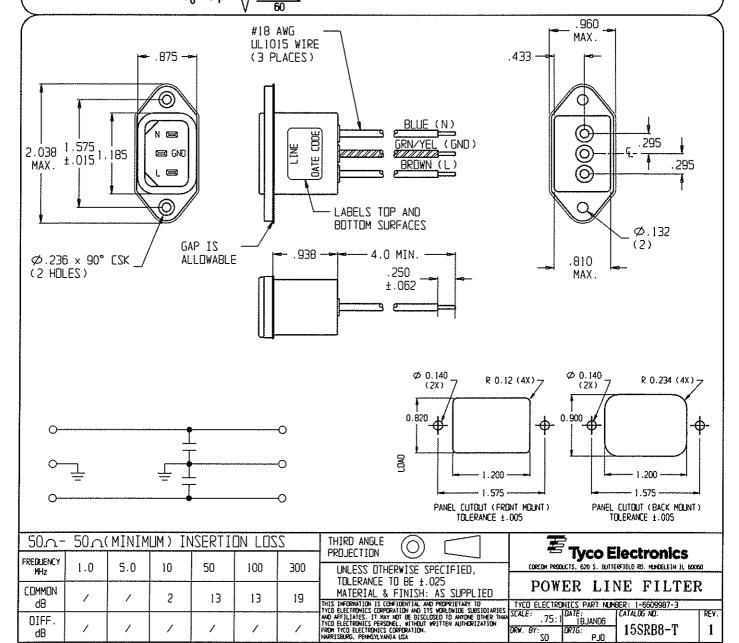

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TE Connectivity: