




REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C1	REVISED PER ECR-10-019377	30SEP2010	HMR	T.M
	D	REVISED PER ECR-14-000206	26DEC2013	DR	RB

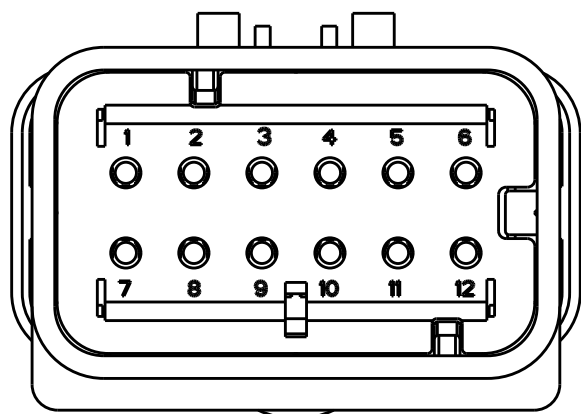


1717677-2
SCALE 2:1

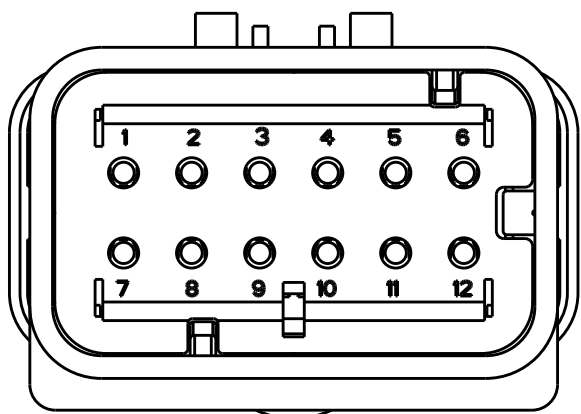

1717677-3
SCALE 2:1

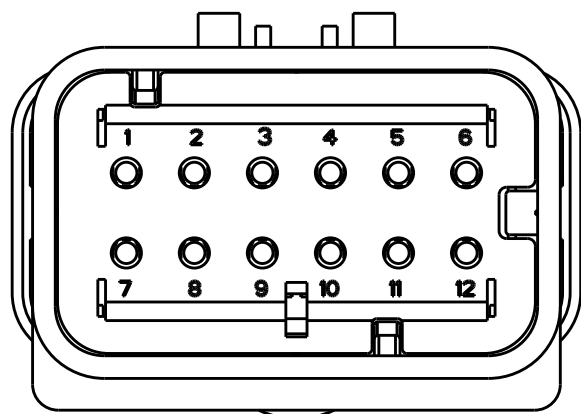


1717677-4
SCALE 2:1

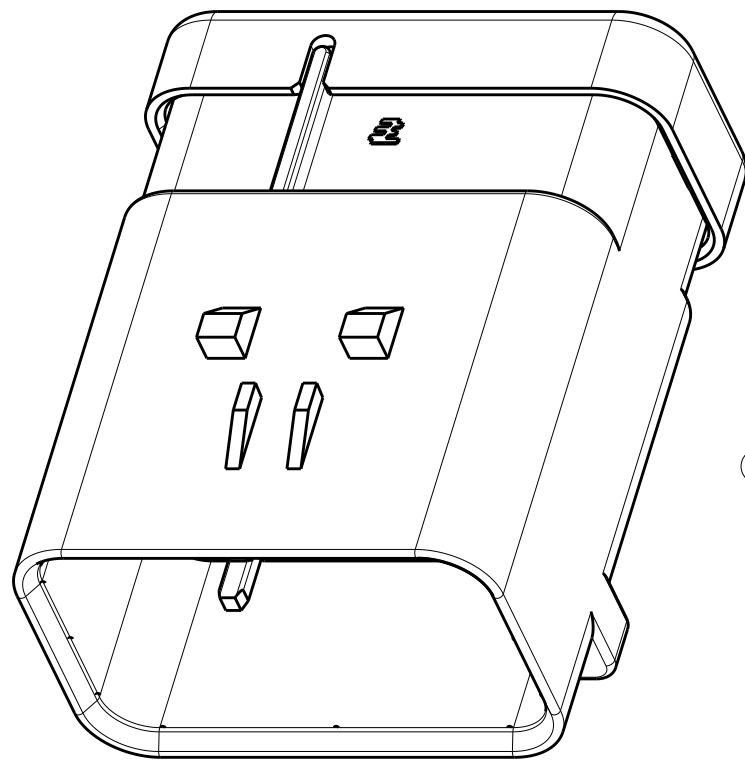


SCALE 2:1

- ① MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: BLACK
- ② MATERIAL: 15% GLASS FILLED THERMOPLASTIC
COLOR: (SEE TABLE)
- ③ MATERIAL: SILICONE
COLOR: GREEN


4. WIRE INSULATION RANGE: $\varnothing 2.24 \sim \varnothing 3.94$

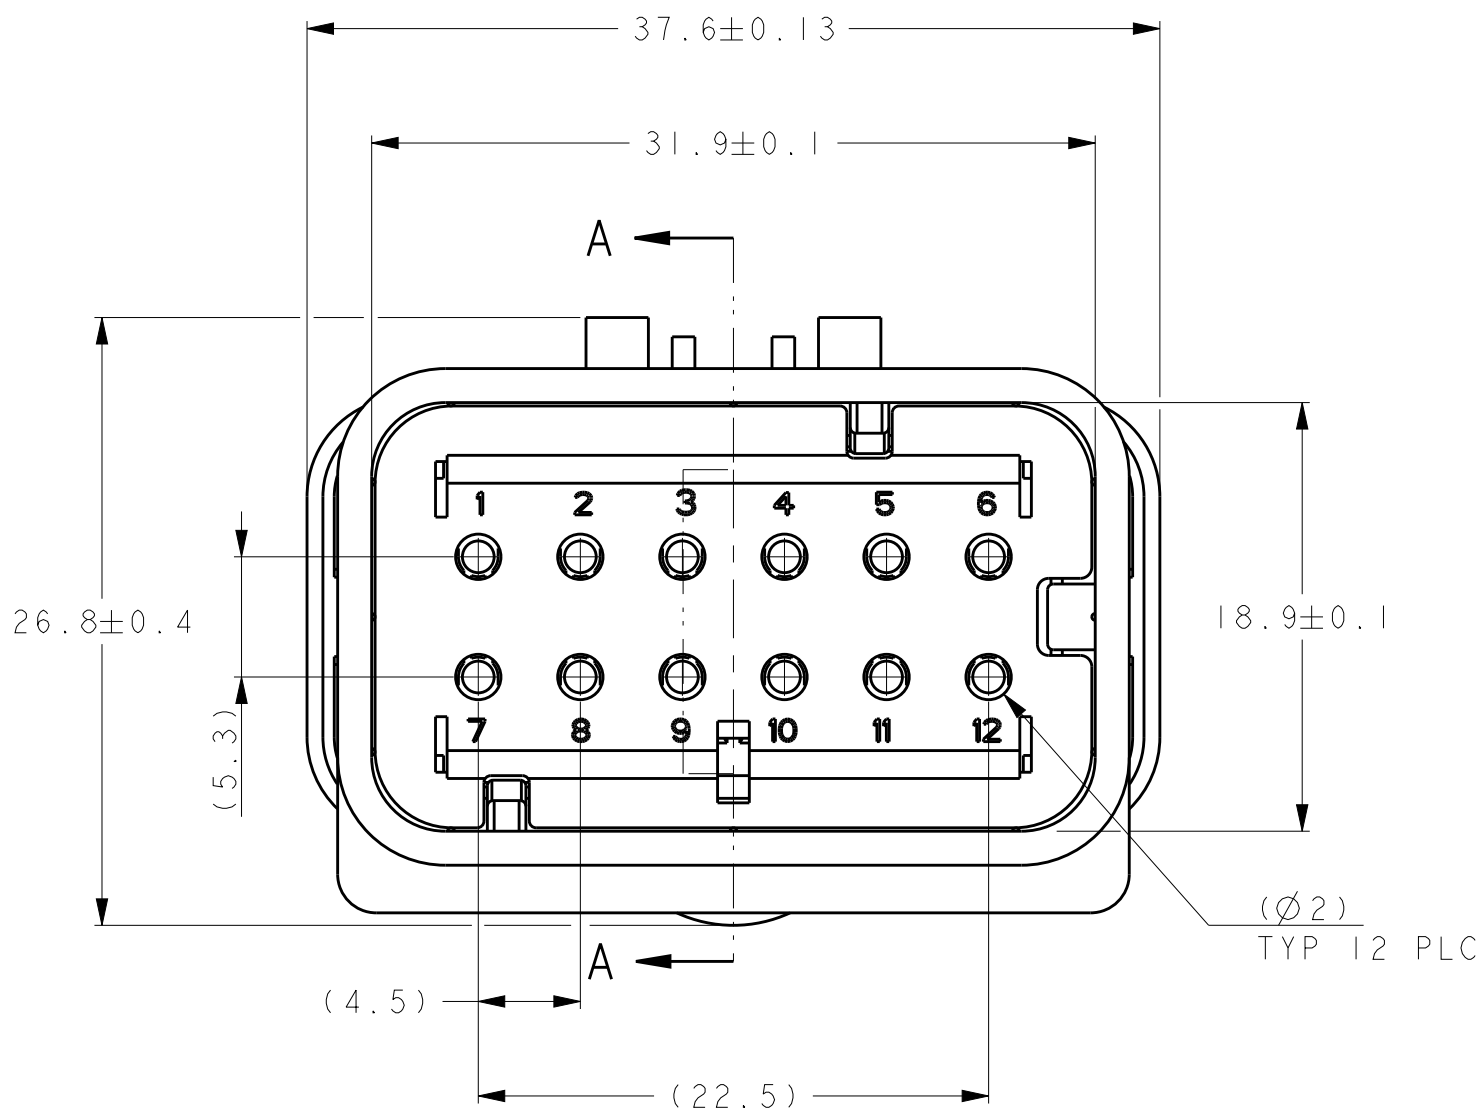

1717677-1 SHOWN

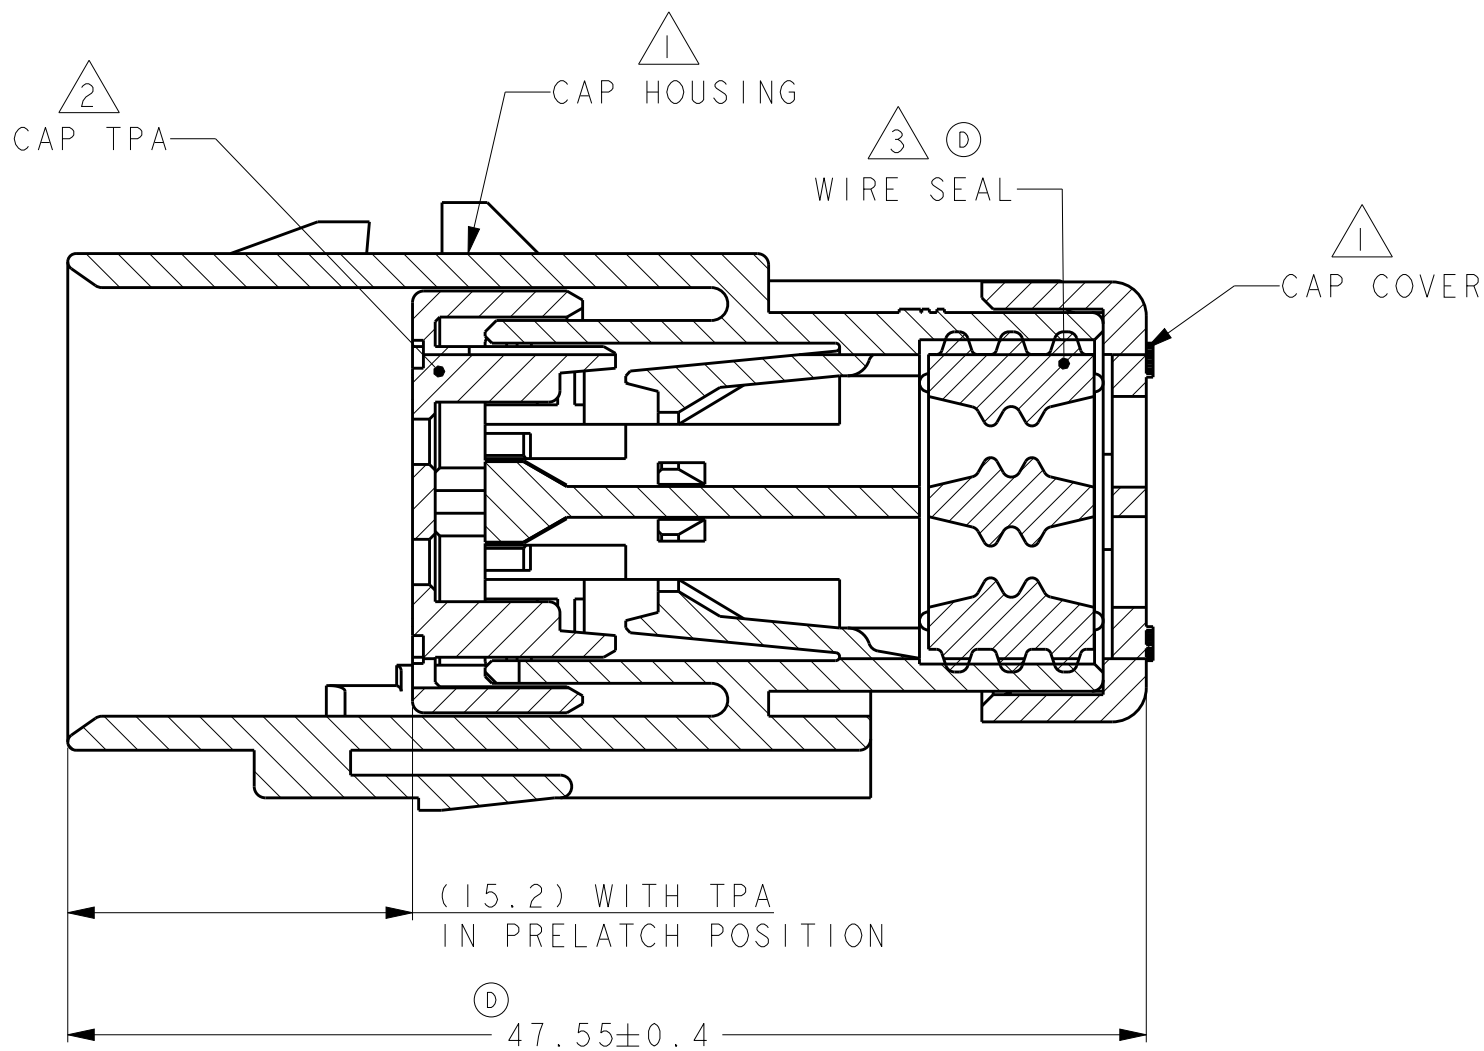

A-A
OPEN POSITION

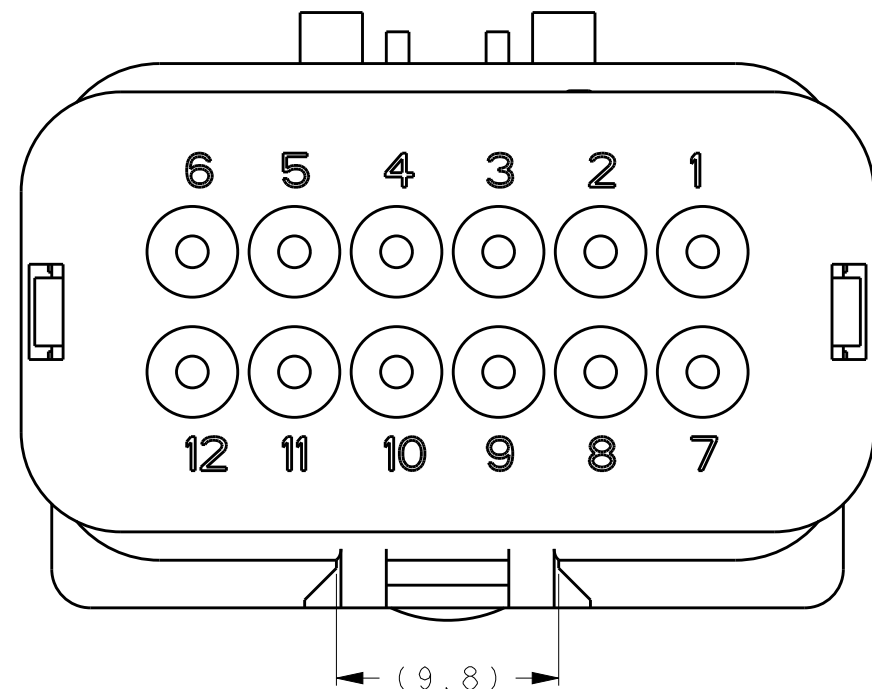

GREEN	1717677-4
YELLOW	1717677-3
GRAY	1717677-2
RED	1717677-1
TPA COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Y. KATO 15JAN2004	TE Connectivity			
DIMENSIONS:		CHK S. MANABE 15JAN2004				
mm		APVD S. MANABE 15JAN2004	NAME CAP ASSY, 12 POS. BRACKET REVERSE TYPE AMP SEAL 16			
		PRODUCT SPEC	SIZE			
		108-2184	CAGE CODE			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC	DRAWING NO			
0 PLC ±		114-13065	RESTRICTED TO			
1 PLC ±		WEIGHT	A20779C-1717677			
2 PLC ±		Customer Drawing	SCALE 3:1			
3 PLC ±			SHEET 1 OF 1			
4 PLC ±			REV D			
ANGLES ±						
FINISH						

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TE Connectivity:](#)

[1717677-1](#)