
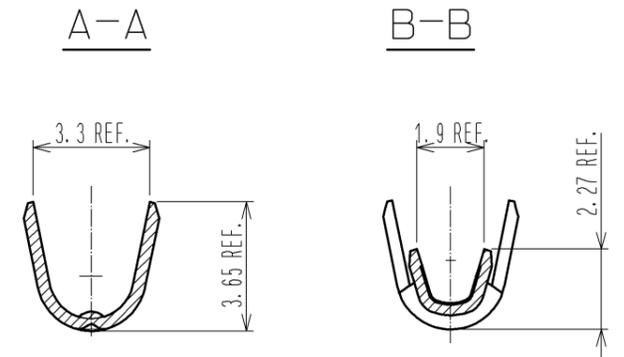
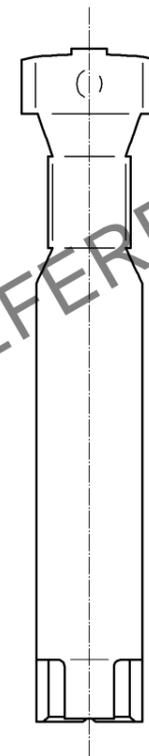
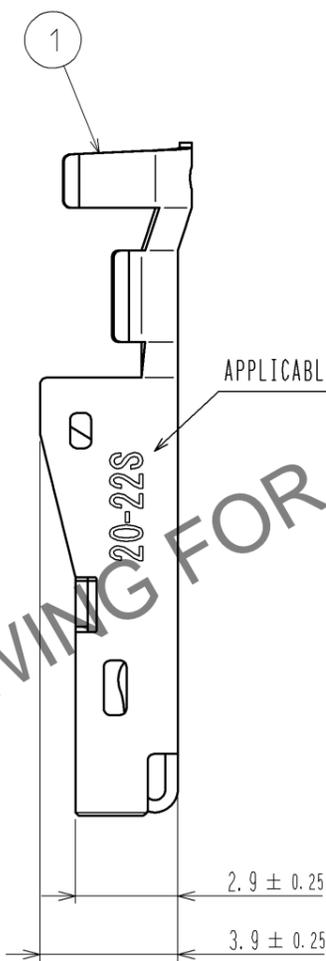
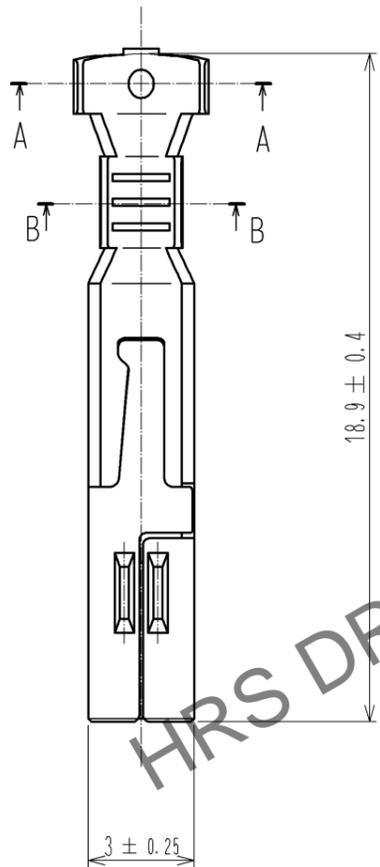



Dec.1.2025 Copyright 2025 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
 In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

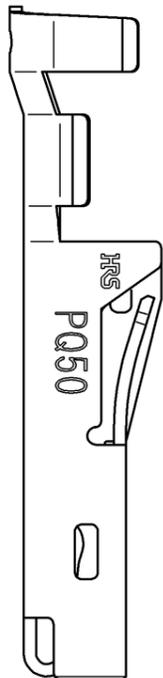

- NOTES
1. APPLICABLE WIRE IS AWG #20~#22. (UL1007, UL1015)
INSULATION DIAMETER ϕ 2.70mm MAX.
 2. APPLICABLE CRIMPING MACHINE AND CRIMPING CONDITIONS (CRIMP HEIGHT etc.) WILL BE SPECIFIED ACCORDING TO AWG # OR WIRE APPLIED.
 3. ONE PACKAGE CONSISTS OF 100 PCS.
 4. REFER TO ATAI-E3038 FOR CRIMP QUALITY STANDARDS.

NO. 1		MATERIAL COPPER ALLOY		CONTACT AREA : GOLD PLATING 0.2 μ m MIN.		TERMINAL AREA : TIN PLATING 1 μ m MIN.		UNDER PLATING : NICKEL PLATING 0.5 μ m MIN.	
NO.		FINISH . REMARKS		NO.		MATERIAL		FINISH . REMARKS	
UNITS mm		SCALE 5 : 1		COUNT 1		DESCRIPTION OF REVISIONS		DESIGNED TY. MIURA	
HRS HIROSE ELECTRIC CO., LTD.		APPROVED : RI. TAKAYASU 12.12.11		DRAWING NO. EDC3-128192-00		CHECKED : AH. KODAMA 12.12.11		PART NO. PQ50-2022SCA	
		DESIGNED : TY. MIURA 12.12.10		CODE NO. CL236-2045-6-00		DRAWN : TY. MIURA 12.12.10		DATE 14.01.20	