

ATC 900 C Series X7R Ceramic RF Power Multilayer Capacitors

- Case C Size (.250" x .250")
- Capacitance Range 0.01 μ F to 1 μ F
- Low ESR/ESL
- Mid-K
- Rugged Construction
- High Reliability
- Available with Encapsulation Option*

ATC, the industry leader, offers new improved ESR/ESL performance for the 900 C Series RF Capacitors. This Series exhibits superior volumetric efficiency, providing high levels of capacitance for HF/ RF power applications. Ceramic construction provides a rugged, hermetic package.

ATC offers an encapsulation option for applications requiring extended protection against arc-over and corona.

Typical functional applications: Bypass, Coupling and DC Blocking.

Typical circuit applications: HF/RF Power Amplifiers, High Frequency Switch Mode Power Supplies, and Medical Electronics.

*For leaded styles only.

ENVIRONMENTAL TESTS

ATC 900 C Series Capacitors are designed and manufactured to meet and exceed the requirements of EIA-198, MIL-PRF-55681 and MIL-PRF-123.

THERMAL SHOCK:

MIL-STD-202, Method 107, Condition A.

MOISTURE RESISTANCE:

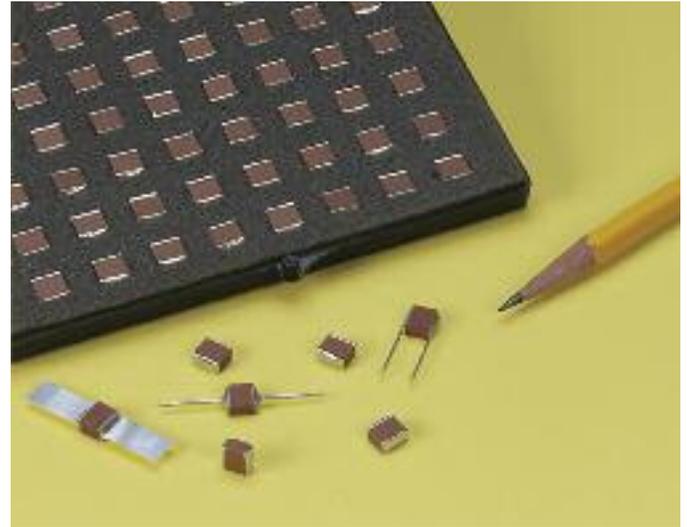
MIL-STD-202, Method 106.

LOW VOLTAGE HUMIDITY:

MIL-STD-202, Method 103, Condition A, with 1.5 Volts DC applied while subjected to an environment of 85°C with 85% relative humidity for 240 hours min.

LIFE TEST:

MIL-STD-202, Method 108, for 2000 hours, at 125°C. 200% WVDC applied.



ELECTRICAL AND MECHANICAL SPECIFICATIONS

DISSIPATION FACTOR (DF): 2.5% max. at 1 KHz.

TEMPERATURE COEFFICIENT OF CAPACITANCE (TCC):
Less than $\pm 15\%$ (-55°C to +125°C)

INSULATION RESISTANCE (IR):
0.01 MFd to 1 MFd

1000 megohms min. @ +25°C at rated WVDC.
100 megohms min. @ +125°C at rated WVDC.

WORKING VOLTAGE (WVDC):

See Capacitance Values Table, page 2.

DIELECTRIC WITHSTANDING VOLTAGE (DWV):

Case C: 250% of rated WVDC for 5 secs.

AGING EFFECTS: 3% maximum per decade hour.

PIEZOELECTRIC EFFECTS: Negligible

DIELECTRIC ABSORPTION: 2% typical

OPERATING TEMPERATURE RANGE:

-55°C to +125°C (No derating of working voltage).

TERMINATION STYLES:

Available in various surface mount and leaded styles. See Mechanical Configurations, page 3.

TERMINAL STRENGTH: Terminations for chips and pellets withstand a pull of 10 lbs. min., 15 lbs. typical, for 5 seconds in direction perpendicular to the termination surface of the capacitor. Test per MIL-STD-202, method 211.



AMERICAN

ATC North America
sales@atceramics.com

TECHNICAL

ATC Europe
saleseur@atceramics.com

CERAMICS

ATC Asia
sales@atceramics-asia.com



ISO 9001 REGISTERED
COMPANY

THE ENGINEERS' CHOICE™

www.atceramics.com

ATC # 001-815 Rev. L, 9/14

ATC 900 C Capacitance Values

CAP. CODE	CAP. (MFd)	TOL.	RATED WVDC
103	.010	K, M, N	300
153	.015		300
223	.022		300
333	.033		250
473	.047		250
683	.068		250
104	.10		200
154	.15		200
224	.22		200
334	.33		150
474	.47		150
684	.68		150
824	.82		100
105	1.0		100


$VRMS = 0.707 \times WVDC$

- SPECIAL VALUES, TOLERANCES, HIGHER WVDC AND MATCHING AVAILABLE.
- ENCAPSULATION OPTION AVAILABLE. PLEASE CONSULT FACTORY.

CAPACITANCE TOLERANCE

Code	K	M	N
Tol.	±10%	±20%	±30%

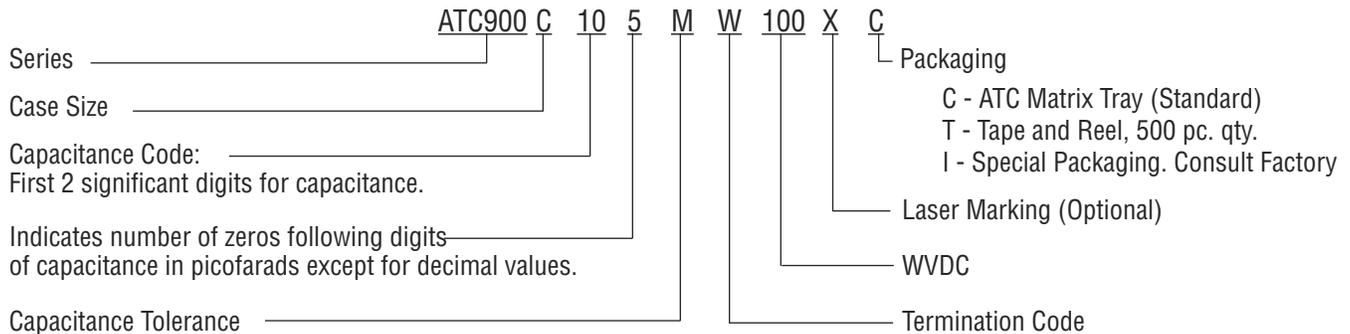ATC PART NUMBER CODE



The above part number refers to a 900 C Series (case size C) 1.0 MFd capacitor, M tolerance (±20%), 100 WVDC, with W termination (Tin/Lead, Solder Plated over Nickel Barrier), laser marking and Waffle-packaging.

ATC accepts orders for our parts using designations *with* or *without* the "ATC" prefix. Both methods of defining the part number are equivalent, i.e., part numbers referenced with the "ATC" prefix are interchangeable to parts referenced without the "ATC" prefix. Customers are free to use either in specifying or procuring parts from American Technical Ceramics.

For additional information and catalogs contact your ATC representative or call direct at (+1-631) 622-4700.

Consult factory for additional performance data.










A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

ATC 900 C Capacitors: Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS		
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS	
900C	W	 Solder Plate		.230 +.020 -.010 (5.84 +0.51 -0.25)	.250 ±.015 (6.35 ±0.38)	.145 (3.68) max. for capacitance values < 0.82 MFd; .165 (4.19) max. for capacitance values ≥ 0.82 MFd.	.040 (1.02) max.	Tin/Lead, Solder Plated over Nickel Barrier Termination	
900C	P	 Pellet		.230 +.025 -.010 (5.84 +0.64 -0.25)				Heavy Tin/Lead Coated, over Nickel Barrier Termination	
900C	T	 Solderable Nickel Barrier		.230 +.020 -.010 (5.84 +0.51 -0.25)				RoHS Compliant Tin Plated over Nickel Barrier Termination	
900C	MS	 Microstrip		.245 ±.025 (6.22 ±0.64)			N/A		High Purity Silver Leads $L_L = .500$ (12.7) min. $W_L = .240 \pm .005$ (6.10 ±.127) $T_L = .004 \pm .001$ (.102 ±.025) Leads are Attached with High Temperature Solder.
900C	AR	 Axial Ribbon							Silver-plated Copper Leads $L_L = 1.0$ (25.4) min. Dia. = .032 ±.002 (0.81 ±0.05)
900C	AW	 Axial Wire							Silver Leads $L_L = .500$ (12.7) min. $W_L = *$ See below $T_L = .004 \pm .001$ (.102 ±.025)
900C	VA	 Vertical Axial Ribbon							Silver-plated Copper Leads $L_L = 1.0$ (25.4) min. Dia. = .032 ±.002 (0.81 ±0.05)
900C	RW	 Radial Wire							

Custom lead styles and lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.
 ** $W_L = .110$ (2.79) for capacitance values < 0.82 MFd.; $W_L = .130$ (3.30) for capacitance values ≥ 0.82 MFd.


ATC 900 C Capacitors: Non-Magnetic Mechanical Configurations

ATC SERIES & CASE SIZE	ATC TERM. CODE	CASE SIZE & TYPE	OUTLINES W/T IS A TERMINATION SURFACE	BODY DIMENSIONS INCHES (mm)			LEAD AND TERMINATION DIMENSIONS AND MATERIALS	
				LENGTH (L)	WIDTH (W)	THICKNESS (T)	OVERLAP (Y)	MATERIALS
900C	WN	C Non-Mag Solder Plate		.230 +.025 -.010 (5.84 +0.64 -0.25)	.250 ±.015 (6.35 ±0.38)	.145 (3.68) max. < 0.82 MFd	.040 (1.02) max.	Tin/Lead, Solder Plated over Non-Magnetic Barrier Termination
900C	TN	C Non-Mag Solderable Barrier		.230 +.025 -.010 (5.84 +0.64 -0.25)				.165 (4.19) max. ≥ 0.82 MFd


Custom lead styles and lengths are available; consult factory. All leads are high purity silver attached with high temperature solder and are **RoHS** compliant.

Suggested Mounting Pad Dimensions

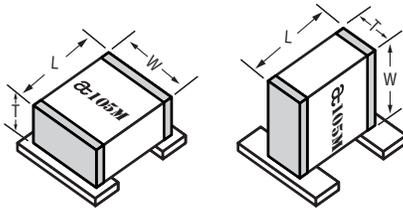Case C Vertical Mount



Horizontal Electrode Orientation Vertical Electrode Orientation



Cap Value	Pad Size	A Min.	B Min.	C Min.	D Min.
< .82 μ F	Normal	.150	.050	.200	.300
	High Density	.130	.030	.200	.260
≥ .82 μ F	Normal	.185	.050	.200	.300
	High Density	.165	.030	.200	.260


Horizontal Mount

All values	Pad Size	A Min.	B Min.	C Min.	D Min.
All values	Normal	.280	.050	.200	.300
	High Density	.260	.030	.200	.260


Dimensions are in inches.

ATC 900 C Performance Data

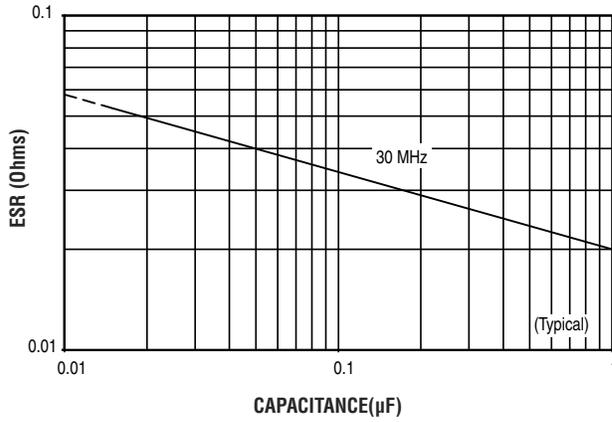
ESR VS. CAPACITANCE
ATC SERIES 900, CASE C



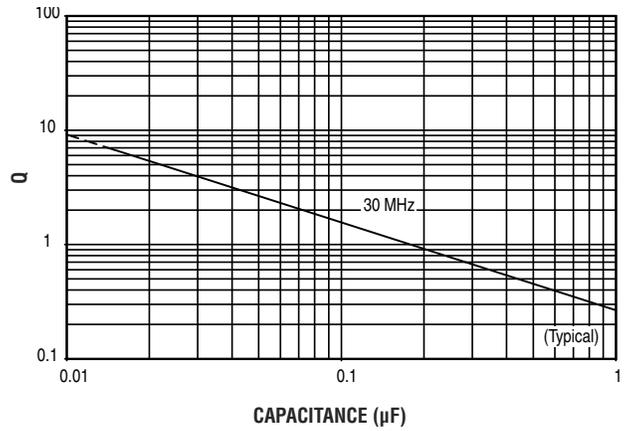
Q VS. CAPACITANCE
ATC SERIES 900, CASE C



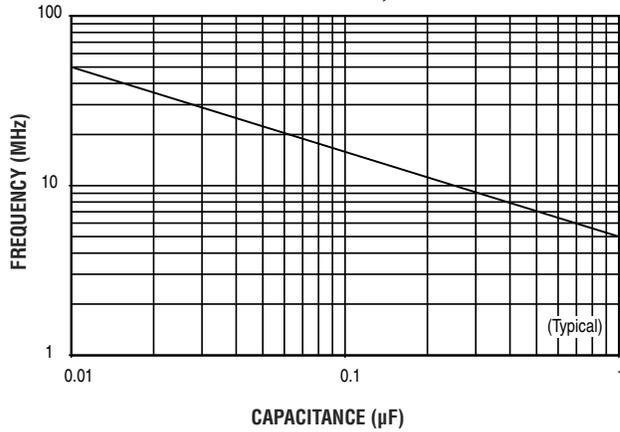SERIES RESONANCE VS. CAPACITANCE
ATC SERIES 900, CASE C



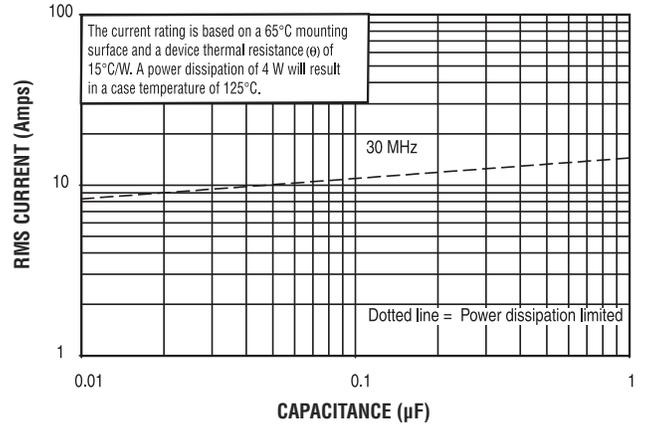CURRENT RATING VS. CAPACITANCE
ATC SERIES 900, CASE C



A M E R I C A N T E C H N I C A L C E R A M I C S

ATC North America
sales@atceramics.com

ATC Europe
sales@atceramics.com

ATC Asia
sales@atceramics-asia.com

Sales of ATC products are subject to the terms and conditions contained in American Technical Ceramics Corp. Terms and Conditions of Sale (ATC document #001-992 Rev. B; 12/05). Copies of these terms and conditions will be provided upon request. They may also be viewed on ATC's website at www.atceramics.com/productfinder/default.asp. Click on the link for Terms and Conditions of Sale.

ATC has made every effort to have this information as accurate as possible. However, no responsibility is assumed by ATC for its use, nor for any infringements of rights of third parties which may result from its use. ATC reserves the right to revise the content or modify its product without prior notice.

© 1996 American Technical Ceramics Corp. All Rights Reserved.

ATC # 001-815 Rev. L, 9/14



AMERICAN

ATC North America
sales@atceramics.com

TECHNICAL

ATC Europe
saleseur@atceramics.com

CERAMICS

ATC Asia
sales@atceramics-asia.com



ISO 9001 REGISTERED
COMPANY

THE ENGINEERS' CHOICE™

www.atceramics.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[American Technical Ceramics \(ATC\):](#)

[603X7R104JT1AT](#) [0603X7R104JT1AT](#)