



Main

| | |
|------------------------------|---|
| Range of product | Zelio Control |
| Product or component type | Modular measurement and control relays |
| Relay type | Motor temperature control relay |
| Product specific application | For 3-phase supply |
| Relay name | RM35TM |
| Relay monitored parameters | Motor temperature via PTC probe Phase failure detection Phase sequence Selection (with or without memory) Test/reset button |
| Time delay type | Fixed 0.3 s |
| Switching capacity in VA | 1250 VA |
| Measurement range | 0...20 Ohm short-circuit detection 208...480 V voltage AC |

Complementary

| | |
|------------------------------|--|
| Reset time | 10000 ms output |
| Maximum switching voltage | 250 V AC 250 V DC |
| Minimum switching current | 10 mA at 5 V DC |
| Maximum switching current | 5 A AC 5 A DC |
| Supply voltage limits | 20.4...264 V AC 20.4...264 V DC |
| Power consumption in VA | 0...4 VA at 24...240 V AC |
| Power consumption in W | <= 0.5 W DC |
| Control circuit frequency | 50...60 Hz +/- 10 % |
| Resistance across terminals | 602 mOhm |
| Output contacts | 2 NO |
| Nominal output current | 5 A |
| Measurement voltage limits | 176...528 V AC |
| Run-up delay at power-up | <= 500 ms |
| Voltage range | 176...528 V |
| Response time | > 50 ms input Y1 (contact Y1-T1) and push-button |
| [Uc] control circuit voltage | <= 3.6 V of temperature control circuit (T1-T2 terminals open) |
| Short-circuit current | 0.007 A temperature sensing circuit (T1-T2 terminals short circuited) |
| Resistance | <= 1500 Ohm temperature sensor at 68 °F (20 °C) |
| Tripping threshold | 3100 Ohm (+/- 10 % temperature control circuit) |
| Reset threshold | 1650 Ohm (+/- 10 % temperature control circuit) |
| Marking | CE |
| Overvoltage category | III conforming to IEC 60664-1 |
| Insulation resistance | > 500 MOhm at 500 V DC between supply and relay output conforming to IEC 60255-5 > 500 MOhm at 500 V DC between measurement and relay output conforming to IEC 60664-1 > 1 MOhm at 500 V DC between supply and measurement conforming to IEC 60255-5 > 500 MOhm at 500 V DC between supply and relay output conforming to IEC 60664-1 > 500 MOhm at 500 V DC between measurement and relay output conforming to IEC 60255-5 > 1 MOhm at 500 V DC between supply and measurement conforming to IEC 60664-1 |

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

| | |
|-------------------------------|--|
| [Ui] rated insulation voltage | 400 V conforming to IEC 60664-1 |
| Supply frequency | 50/60 Hz +/- 10 % |
| Operating position | Any position without |
| Connections - terminals | Screw terminals 1 x 0.5...1 x 4 mm ² - AWG 20...AWG 11, solid cable without cable end Screw terminals 2 x 0.5...2 x 2.5 mm ² - AWG 20...AWG 14, solid cable without cable end Screw terminals 1 x 0.2...1 x 2.5 mm ² - AWG 24...AWG 12, flexible cable with cable end Screw terminals 2 x 0.2...2 x 1.5 mm ² - AWG 24...AWG 16, flexible cable with cable end |
| Tightening torque | 5.31...8.85 lbf.in (0.6...1 N.m) conforming to IEC 60947-1 |
| Housing material | Self-extinguishing plastic |
| Local signalling | LED green power ON LED yellow phase of relay (R2) LED yellow temperature of relay (R1) |
| Mounting support | 35 mm symmetrical DIN rail conforming to EN/IEC 60715 |
| Electrical durability | 10000 cycles |
| Mechanical durability | <= 30000000 cycles |
| Operating rate | <= 360 operations/hour under full load |
| Utilisation category | AC-12 conforming to IEC 60947-5-1 AC-13 conforming to IEC 60947-5-1 AC-14 conforming to IEC 60947-5-1 AC-15 conforming to IEC 60947-5-1 DC-12 conforming to IEC 60947-5-1 DC-13 conforming to IEC 60947-5-1 |
| Width | 1.38 in (35 mm) |
| Product weight | 0.29 lb(US) (0.13 kg) |

Environment

| | |
|---------------------------------------|---|
| immunity to microbreaks | 20 ms at 20.4 V |
| electromagnetic compatibility | Emission standard for industrial environments conforming to EN/IEC 61000-6-4 Emission standard for residential, commercial and light-industrial environments conforming to EN/IEC 61000-6-3 Immunity for industrial environments conforming to EN/IEC 61000-6-2 |
| standards | EN/IEC 60255-6 IEC 60034-11-2 |
| product certifications | CSA C-Tick GL GOST UL |
| directives | 89/336/EEC - electromagnetic compatibility 73/23/EEC - low voltage directive |
| ambient air temperature for storage | -40...158 °F (-40...70 °C) |
| ambient air temperature for operation | -4...122 °F (-20...50 °C) |
| relative humidity | 95 % at 131 °F (55 °C) conforming to IEC 60068-2-30 |
| vibration resistance | 0.35 mm (f = 5...57.6 Hz) conforming to IEC 60068-2-6 1 gn (f = 57.6...150 Hz) conforming to IEC 60255-21-1 |
| shock resistance | 15 gn 11 ms conforming to IEC 60255-21-1 |
| IP degree of protection | IP20(terminals) conforming to IEC 60529 IP30 (casing) conforming to IEC 60529 |
| pollution degree | 3 conforming to IEC 60664-1 |
| dielectric test voltage | 2 kV 1 min AC 50 Hz |
| non-dissipating shock wave | 4 kV |

Offer Sustainability

| | |
|---|---|
| Green Premium product | Green Premium product |
| Compliant - since 0701 - Schneider Electric declaration of conformity | Compliant - since 0701 - Schneider Electric declaration of conformity |
| Reference not containing SVHC above the threshold | Reference not containing SVHC above the threshold |
| Available | Available |


| | |
|--|--|
| Available | Available |
| WARNING: This product can expose you to chemicals including: | WARNING: This product can expose you to chemicals including: |
| Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. | Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. |
| For more information go to www.p65warnings.ca.gov | For more information go to www.p65warnings.ca.gov |

Contractual warranty

| | |
|-----------------|-----------|
| Warranty period | 18 months |
|-----------------|-----------|


3-Phase Supply and Motor Temperature Control Relays

Dimensions and Mounting

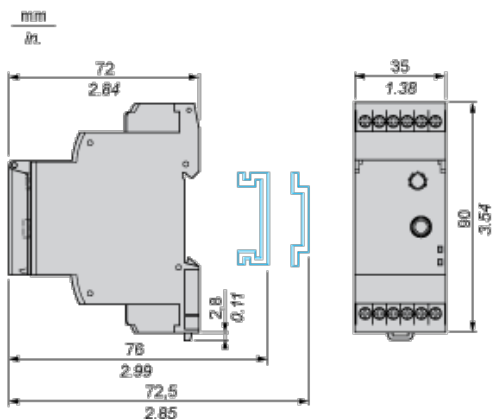


3-Phase Supply and Motor Temperature Control Relays

Wiring Diagram




Function Diagrams

Phase Sequence Control and Phase Failure Detection (U measured < 0.7 x nominal supply voltage)

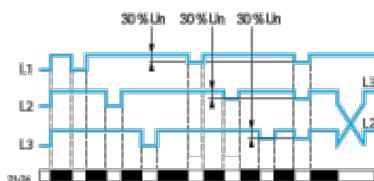

Motor Temperature Control via PTC Probe

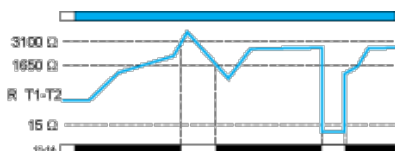

Legend

Un Nominal 3-phase supply voltage

R T1-T2 Resistance between terminals T1 and T2

11-14 R1 output relay connections

Relay status: black color = energized.


NOTE: The temperature control relay can take up to 6 PTC (positive temperature coefficient) probes wired in series between terminals T1 and T2.

Function Diagrams

Motor Temperature Control via PTC Probe

As soon as the temperature returns to the correct value, the relay can be unlocked (reset), either by pressing the "Test/Reset" button (for at least 200 ms), or by closing a volt-free contact (for at least 200 ms) between terminal Y1 and T1 (without a parallel load). When a fault is detected, the "temperature" output relay locks in the open position, even if the "Test/Reset" button is pressed.


With memory ("Memory" mode)

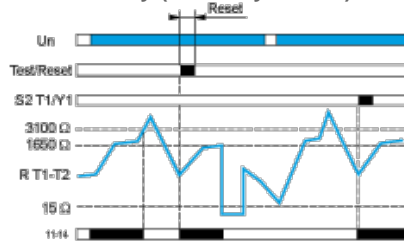


Use of the "Test/Reset" Button

When the temperature is normal, pressing the "Test/Reset" button simulates overheating, the "temperature" output relay contact is open.

Without memory ("No Memory" mode).

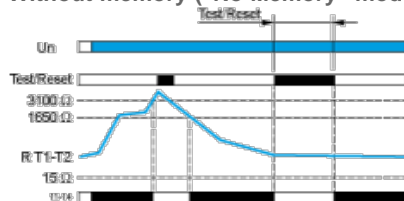

With memory ("Memory" mode)

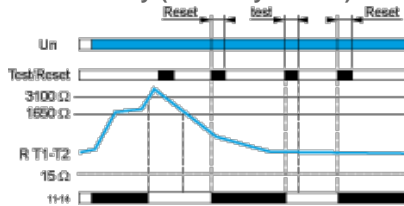

Legend

Un Nominal 3-phase supply voltage

R T1-T2 Resistance between terminals T1 and T2

11-14 R1 output relay connections

Relay status: black color = energized.

In "Memory" mode, "fault" indication is locked and the button must be released then pressed again to reset the function. When a fault has been detected and the temperature has returned to normal, the "temperature" control relay can be unlocked (reset) by pressing the "Test/Reset" button.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Schneider Electric:](#)

[RM35TM250MW](#)