

CMPZDA2V4 THRU CMPZDA47V

**SURFACE MOUNT
DUAL, COMMON ANODE
SILICON ZENER DIODES
2.4 VOLTS THRU 47 VOLTS
350mW**


www.centrasemi.com
DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMPZDA2V4 series dual silicon Zener diode is a high quality voltage regulator, connected in a common anode configuration, for use in industrial, commercial, entertainment and computer applications.

**MARKING CODE: SEE MARKING CODES ON
ELECTRICAL CHARACTERISTICS TABLE**
**SOT-23 CASE****MAXIMUM RATINGS:** ($T_A=25^{\circ}\text{C}$)

Power Dissipation

Operating and Storage Junction Temperature

Thermal Resistance

SYMBOL P_D T_J, T_{stg} Θ_{JA}

350

-65 to +175

429

UNITS

mW

 $^{\circ}\text{C}$ $^{\circ}\text{C/W}$ **ELECTRICAL CHARACTERISTICS PER DIODE:** ($T_A=25^{\circ}\text{C}$) $V_F=0.9\text{V MAX @ } I_F=10\text{mA}$ (for all types)

TYPE	ZENER VOLTAGE $V_Z @ I_{ZT}$		TEST CURRENT	MAXIMUM ZENER IMPEDANCE			MAXIMUM REVERSE CURRENT		MAXIMUM ZENER CURRENT	MAXIMUM ZENER VOLTAGE TEMP. COEFF.	MARKING CODE
	MIN	MAX	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$		I_{ZM}	ΘV_Z	
	V	V	mA	Ω	Ω	mA	μA	V	mA	% / $^{\circ}\text{C}$	
CMPZDA2V4	2.2	2.6	5.0	100	600	1.0	50	1.0	63	-0.06	WW3
CMPZDA2V7	2.5	2.9	5.0	100	600	1.0	20	1.0	57	-0.06	WW4
CMPZDA3V0	2.8	3.2	5.0	95	600	1.0	10	1.0	54	-0.06	WW5
CMPZDA3V3	3.1	3.5	5.0	95	600	1.0	5.0	1.0	47	-0.06	WW6
CMPZDA3V6	3.4	3.8	5.0	95	600	1.0	2.0	1.0	45	-0.06	WW7
CMPZDA3V9	3.7	4.1	5.0	90	600	1.0	2.0	1.0	43	-0.06	WW8
CMPZDA4V3	4.0	4.6	5.0	90	600	1.0	1.0	1.0	40	-0.05	WW9
CMPZDA4V7	4.4	5.0	5.0	80	500	1.0	3.0	2.0	38	-0.03	ZZ1
CMPZDA5V1	4.8	5.4	5.0	60	480	1.0	2.0	2.0	35	0.02	ZZ2
CMPZDA5V6	5.2	6.0	5.0	40	400	1.0	1.0	2.0	32	0.03	ZZ3
CMPZDA6V2	5.8	6.6	5.0	10	150	1.0	3.0	4.0	28	0.04	ZZ4
CMPZDA6V8	6.4	7.2	5.0	15	80	1.0	2.0	4.0	25	0.05	ZZ5
CMPZDA7V5	7.0	7.9	5.0	15	80	1.0	1.0	5.0	23	0.05	ZZ6
CMPZDA8V2	7.7	8.7	5.0	15	80	1.0	0.7	5.0	21	0.06	ZZ7
CMPZDA9V1	8.5	9.6	5.0	15	100	1.0	0.5	6.0	18	0.06	ZZ8
CMPZDA10V	9.4	10.6	5.0	20	150	1.0	0.2	7.0	16	0.07	ZZ9
CMPZDA11V	10.4	11.6	5.0	20	150	1.0	0.1	8.0	15	0.07	YY1
CMPZDA12V	11.4	12.7	5.0	25	150	1.0	0.1	8.0	13	0.07	YY2
CMPZDA13V	12.4	14.1	5.0	30	170	1.0	0.1	8.0	12	0.08	YY3
CMPZDA15V	13.8	15.6	5.0	30	200	1.0	0.05	10.5	11	0.08	YY4
CMPZDA16V	15.3	17.1	5.0	40	200	1.0	0.05	11.2	10	0.08	YY5
CMPZDA18V	16.8	19.1	5.0	45	225	1.0	0.05	12.6	9.2	0.08	YY6
CMPZDA20V	18.8	21.2	5.0	55	225	1.0	0.05	14.0	8.3	0.08	YY7
CMPZDA22V	20.8	23.3	5.0	55	250	1.0	0.05	15.4	7.6	0.09	YY8

R9 (10-August 2012)

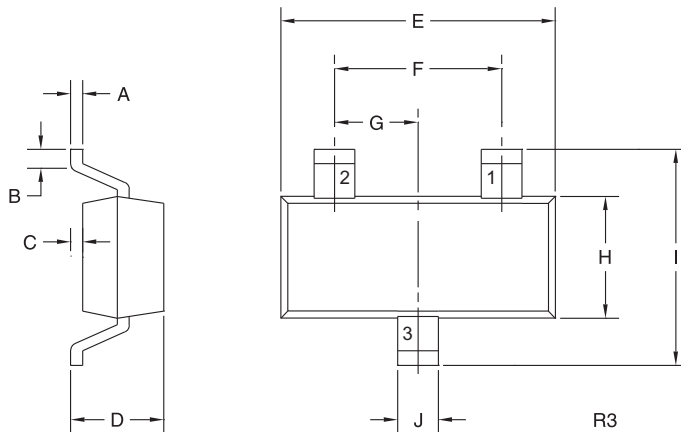
CMPZDA2V4 THRU CMPZDA47V

**SURFACE MOUNT
DUAL, COMMON ANODE
SILICON ZENER DIODES
2.4 VOLTS THRU 47 VOLTS
350mW**




ELECTRICAL CHARACTERISTICS PER DIODE - Continued: ($T_A=25^{\circ}\text{C}$) $V_F=0.9\text{V MAX @ } I_F=10\text{mA}$ (for all types)

TYPE	ZENER VOLTAGE $V_Z @ I_{ZT}$		TEST CURRENT I_{ZT}	MAXIMUM ZENER IMPEDANCE			MAXIMUM REVERSE CURRENT		MAXIMUM ZENER CURRENT I_{ZM}	MAXIMUM ZENER VOLTAGE TEMP. COEFF. ΘV_Z	MARKING CODE
	MIN	MAX		$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$				
	V	V		Ω	Ω	mA	μA	V		% / $^{\circ}\text{C}$	
CMPZDA24V	22.8	25.6	5.0	70	250	1.0	0.05	16.8	7.0	0.09	YY9
CMPZDA27V	25.1	28.9	2.0	80	300	0.5	0.05	18.9	6.2	0.09	W10
CMPZDA30V	28.0	32.0	2.0	80	300	0.5	0.05	21.0	5.6	0.09	W11
CMPZDA33V	31.0	35.0	2.0	80	325	0.5	0.05	23.1	5.0	0.09	W12
CMPZDA36V	34.0	38.0	2.0	90	350	0.5	0.05	25.2	4.6	0.09	W13
CMPZDA39V	37.0	41.0	2.0	130	350	0.5	0.05	27.3	4.3	0.09	W14
CMPZDA43V	40.0	46.0	2.0	150	375	0.5	0.05	30.1	3.9	0.10	W15
CMPZDA47V	44.0	50.0	2.0	170	375	0.5	0.05	32.9	3.5	0.10	W16

SOT-23 CASE - MECHANICAL OUTLINE

SYMBOL	DIMENSIONS		MIN	MAX
	INCHES	MILLIMETERS		
A	0.003	0.007	0.08	0.18
B	0.006	-	0.15	-
C	-	0.005	-	0.13
D	0.035	0.043	0.89	1.09
E	0.110	0.120	2.80	3.05
F	0.075	1.90		
G	0.037	0.95		
H	0.047	0.055	1.19	1.40
I	0.083	0.098	2.10	2.49
J	0.014	0.020	0.35	0.50

SOT-23 (REV: R3)

**LEAD CODE:**

- 1) Cathode D2
- 2) Cathode D1
- 3) Anode D1, D2

MARKING CODE:

SEE MARKING CODES ON ELECTRICAL CHARACTERISTICS TABLE

R9 (10-August 2012)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Central Semiconductor:

[CMPZDA2V7 TR TIN/LEAD](#) [CMPZDA20V TR TIN/LEAD](#) [CMPZDA2V4 TR TIN/LEAD](#) [CMPZDA3V3 TR TIN/LEAD](#)
[CMPZDA16V TR TIN/LEAD](#) [CMPZDA7V5 TR TIN/LEAD](#) [CMPZDA3V9 TR TIN/LEAD](#) [CMPZDA36V TR TIN/LEAD](#)
[CMPZDA9V1 TR TIN/LEAD](#) [CMPZDA43V TR TIN/LEAD](#) [CMPZDA30V TR TIN/LEAD](#) [CMPZDA10V TR TIN/LEAD](#)