

Coaxial Bi-Directional Coupler

ZFBDC16-63HP+

50Ω Up to 75W 700 to 6000 MHz

The Big Deal

- Wideband, 700 to 6000 MHz
- High power handling, up to 75W
- Low mainline loss, 0.55 dB
- High directivity, 25 dB
- Excellent return loss, 20 dB typ.



CASE STYLE: JD1252

Product Overview

Mini-Circuits' ZFBDC16-63HP+ is a coaxial high-power, wideband bi-directional coupler supporting applications from 700 to 6000 MHz. This model is capable of handling up to 75W RF input power and provides high directivity, low mainline loss, and excellent return loss. The coupler comes housed in a rugged aluminum alloy case (2.00 x 2.00 x 0.88") with your choice of SMA or N-Type connectors.

Key Features

Feature	Advantages
Wideband, 700 to 6000 MHz	One device supports a broad range of applications.
Very high input power handling: • 75W, 700 to 2700 MHz • 50W, 2700 to 3500 MHz • 40W, 3500 to 6000 MHz	Produces nearly equal output signals, ideal for parallel path / multichannel systems.
Low mainline loss, 0.55 dB typ.	Provides excellent through-path signal power transmission.
Good directivity, 25 dB	High directivity allows accurate signal sampling through the coupled port with minimal measurement error.
Good return loss, 20 dB typ.	Well-matched for 50Ω systems with minimal signal reflection.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Bi-Directional Coupler

50Ω Up to 75W 700 to 6000 MHz

ZFBDC16-63HP+



Generic photo used for illustration purposes only
SMA version shown
CASE STYLE: JD1252

Connectors	Model
N-Type	ZFBDC16-63HP-N+
SMA	ZFBDC16-63HP-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

INPUT	1
OUTPUT	2
COUPLED (forward)	4
COUPLED (reverse)	3

Outline Drawing

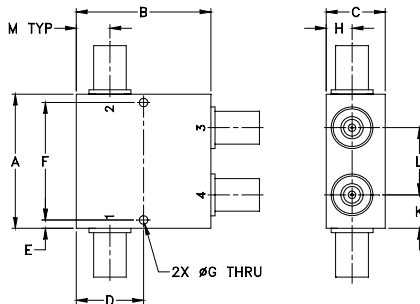

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
2.00	2.00	.88	1.000	0.13	1.750	0.125
50.80	50.80	22.35	25.40	3.30	44.45	3.18
H	J	K	L	M	wt	
0.38	--	0.50	1.00	0.50	grams	
9.65	--	12.70	25.40	12.70	250.0	

Features

- excellent mainline loss, 0.55 dB typ.
- excellent directivity, 25 dB typ.
- high power, up to 75W
- rugged shielded case

Applications


- power leveling & monitoring
- military mobile
- cellular
- WiMax
- PCN
- GSM
- WIFI

Electrical Specifications at 25°C

Parameter	Condition (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		700		6000	
Mainline Loss ¹	700 - 3500	—	0.4	0.7	dB
	3500 - 6000	—	0.6	0.9	
Coupling	700 - 1000	—	26.6±1.8	—	dB
	1000 - 1700	—	23±2.4	—	
	1700 - 2000	—	20.5±1	—	
	2000 - 2700	—	19±1.4	—	
	2700 - 3500	—	17.5±1	—	
Coupling Flatness(±)	3500 - 6000	—	16.5±0.8	—	dB
	1700 - 2000	—	0.6	0.9	
	2700 - 3500	—	0.6	1.0	
Directivity	3500 - 6000	—	0.5	0.9	dB
	700 - 2000	20	25	—	
	2000 - 3500	18	23	—	
	3500 - 4200	15	22	—	
Return Loss (Input)	4200 - 6000	11	18	—	dB
	700 - 3500	19	25	—	
Return Loss (Output)	3500 - 6000	14	20	—	dB
	700 - 3500	19	25	—	
Return Loss (Coupling)	3500 - 6000	17	25	—	dB
	700 - 3500	12	18	—	
Input Power	700 - 2700	—	—	75	W
	2700 - 3500	—	—	50	
	3500 - 6000	—	—	40	

1. Mainline loss includes theoretical power loss at coupled

Electrical Schematic



* ELECTRICAL SCHEMATIC IS FOR BI-DIRECTIONAL COUPLER WITHOUT INTERNAL TRANSFORMERS AND RESISTORS.

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp






www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. A
M157160
ED-15040904
ZFBDC16-63HP+
WP/CP/AM
210308
Page 2 of 3

Typical Performance Data

Frequency (MHz)	Mainline Loss (dB)	Coupling (dB)		Directivity (dB)		Return Loss (dB)			
	In-Out	In-Cpl Fwd	Out-Cpl Rev	Out-Cpl Fwd	In-Cpl Rev	In	Out	Cpl Fwd	Cpl Rev
700.0	0.18	28.06	28.07	23.61	23.37	39.26	41.15	30.78	31.66
800.0	0.19	26.96	26.97	23.89	23.41	35.99	36.49	30.71	30.35
1100.0	0.23	24.37	24.39	24.76	24.14	30.87	29.89	28.24	28.67
1400.0	0.27	22.50	22.52	27.32	25.98	27.91	26.97	28.62	29.08
1700.0	0.30	21.07	21.10	31.35	29.90	26.43	24.92	29.60	30.19
2000.0	0.32	19.93	19.98	32.08	32.71	24.32	23.10	31.31	30.68
2400.0	0.40	18.78	18.83	30.36	33.13	22.42	22.91	35.50	37.03
2700.0	0.46	17.92	17.96	30.79	31.68	22.53	25.53	31.72	34.91
3200.0	0.46	17.27	17.30	25.75	40.97	27.98	28.50	30.42	29.66
3600.0	0.50	16.81	16.82	25.61	32.71	32.88	29.64	35.58	33.16
4000.0	0.59	16.50	16.48	28.21	33.04	26.55	26.18	37.01	41.27
4400.0	0.60	16.25	16.25	24.15	33.46	27.91	23.91	35.11	38.00
4700.0	0.59	16.16	16.14	27.38	28.26	23.55	23.71	28.43	29.92
5200.0	0.64	16.22	16.17	21.83	19.57	19.71	21.03	19.36	19.46
5600.0	0.72	16.28	16.22	17.64	16.67	22.10	21.50	18.08	18.31
6000.0	0.72	16.35	16.32	17.58	15.21	25.13	21.99	24.82	25.14

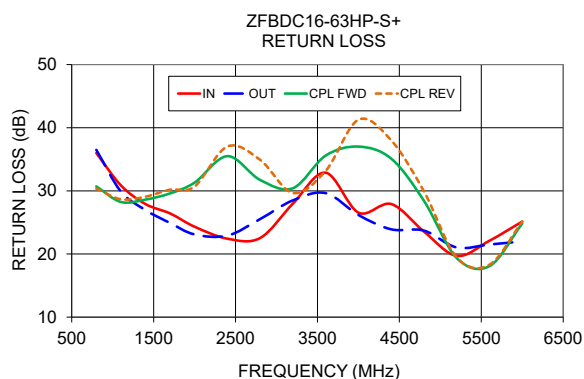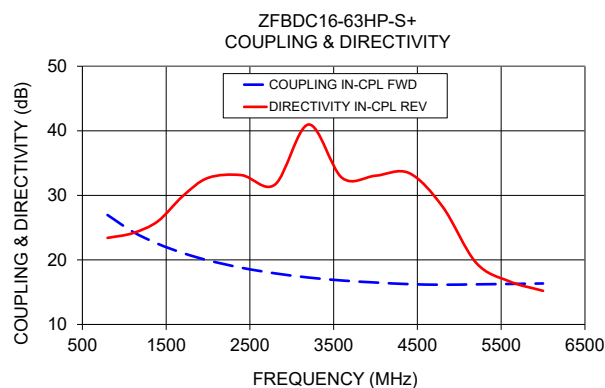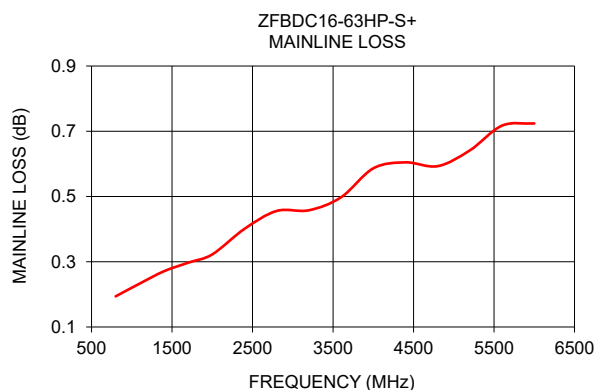

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Mini-Circuits:](#)

[ZFBDC16-63HP-S+](#) [ZFBDC16-63HP-N+](#)