

# Product data sheet

Specifications



## Complete beacon, Harmony XVB Universal, clear strobe, 70mm, 5 joules, 24V AC/DC

XVBL6B7

⚠ To be discontinued

⚠ To be discontinued on: Jun 30, 2025

⚠ To be end-of-service on: Dec 31, 2026

**Product availability: Non-Stock - Not normally stocked in distribution facility**

### Main

Range of Product	Harmony XVB Universal
Product or Component Type	Complete beacon
Beacon or indicator bank unit type	Base unit direct or tube fixing Illuminated unit
Signalling type	Flashing
Mounting diameter	2.8 in (70 mm)
Component name	XVBL
Material	Glass reinforced polyamide: base unit Polycarbonate: illuminated unit
Light source	Integral flash discharge tube, clear
Bulb type	Flash discharge tube
[Us] rated supply voltage	24 V AC/DC

### Complementary

Connections - terminals	Screw clamp terminals, <= 1 x 1.5 mm <sup>2</sup> with cable end
[Ui] rated insulation voltage	250 V IEC 60947-1
Nominal voltage limit	0.85...1.1 Un IEC 60947-5-1
Current consumption	< 350 mA DC < 550 mA AC
[Uimp] rated impulse withstand voltage	4 kV IEC 60947-1
Flash energy	5 J
Flashing frequency	1 Hz
Illuminating intensity	13 cd
CAD overall width	2.8 in (70 mm)
CAD overall height	9.1 in (232 mm)
CAD overall depth	2.8 in (70 mm)
Terminals description ISO n°1	(GND)GROUND (COM-1)PW
Product Weight	0.97 lb(US) (0.44 kg)

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

## Environment

Product Certifications	CCC EAC CSA C22-2 No 14 UL 508
Standards	IEC 60947-5-1
Protective treatment	TC
Ambient Air Temperature for Storage	-40...158 °F (-40...70 °C)
Electrical shock protection class	Class I on support tube IEC 61140 Class II on base unit IEC 61140
IP degree of protection	IP65 on fixing base XVBZ0. IEC 60529 IP66 on base unit IEC 60529
NEMA degree of protection	Type 4X UL indoor)

## Ordering and shipping details

Category	US100XV22611
Discount Schedule	00XV
GTIN	3389110844702
Returnability	No
Country of origin	FR

## Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	3.15 in (8.000 cm)
Package 1 Width	3.15 in (8.000 cm)
Package 1 Length	9.92 in (25.200 cm)
Package 1 Weight	15.344 oz (435.000 g)
Unit Type of Package 2	S03
Number of Units in Package 2	12
Package 2 Height	11.81 in (30.000 cm)
Package 2 Width	11.81 in (30.000 cm)
Package 2 Length	15.75 in (40.000 cm)
Package 2 Weight	12.566 lb(US) (5.700 kg)
Unit Type of Package 3	P06
Number of Units in Package 3	96
Package 3 Height	29.53 in (75.000 cm)
Package 3 Width	31.50 in (80.000 cm)
Package 3 Length	23.62 in (60.000 cm)
Package 3 Weight	118.168 lb(US) (53.600 kg)

## Contractual warranty

Warranty	18 months
----------	-----------



## Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)

### Environmental footprint

Carbon footprint (kg CO2 eq, Total Life cycle)	23
--	----

## Use Better

### Materials and Substances

Packaging made with recycled cardboard	Yes
--	-----

Packaging without single use plastic	Yes
--------------------------------------	-----

<a href="#">EU RoHS Directive</a>	Pro-active compliance (Product out of EU RoHS legal scope)
-----------------------------------	--

SCIP Number	124e2d7a-5b1e-45ca-b93c-220dd91b55b6
-------------	--------------------------------------

REACH Regulation	<a href="#">REACH Declaration</a>
------------------	-----------------------------------

California proposition 65	<b>WARNING:</b> This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
---------------------------	--

## Use Again

### Repack and remanufacture

Circularity Profile	<a href="#">No need of specific recycling operations</a>
---------------------	--

Take-back	No
-----------	----


WEEE	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
------	--

Dimensions Drawings

Illuminated Beacon with "Flash" Discharge Tube Unit

---

Dimensions

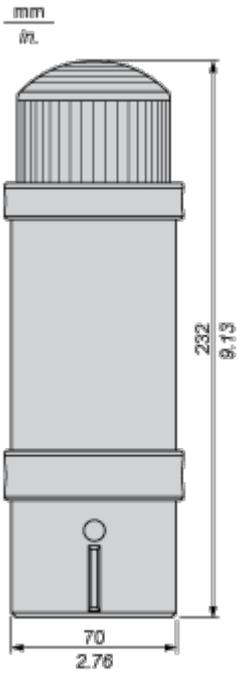


Connections and Schema

Illuminated Beacon

---


Wiring Diagram



Technical Illustration

Dimensions

---

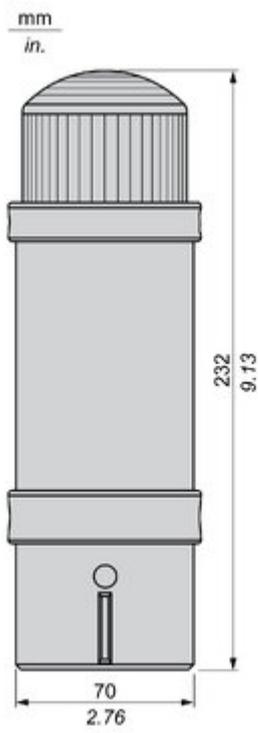

Technical Illustration

Wiring diagram

---

